

## DSLHPT Pass-Thru

Heated Pass-Thru w/Glass Doors

Models	
☐ DSLHPT1-G	☐ DSLHPT2-G
DSLHPT1-GH	☐ DSLHPT2-GH



DSLHPT2-G

### Standard Features

- · Stainless steel exterior and interior
- easyTouch Control with remote monitoring Tray Slides (type A & A/C) capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- · Door activated interior LED light
- Heavy-duty cylinder lockOne piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 6" high adjustable stainless steel legs
- 8' cord and plug
- · Adjustable Electronic Temp Control From 80°F To 180°F
- Built-In, Adjustable Humidity Control Vent
- · Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even **Temperatures**
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

### Options & Accessories

- 3" Or 6" Casters
- Stainless Steel Kick Plate
- Door Swing Orientation (at time of order)
- Exterior Door Laminate
- · Correctional Package • Additional Shelves
- 6" Seismic Legs

### Specifications

Heating system: Cabinets are designed to maintain temperatures between 80°F - 180°F. Units are heated with two bottom-mounted heating elements per section. The externally mounted blower allows for full use of interior cabinet while maintaining even temperatures. System is controlled using an electronic temperature control.








Phone: 800-733-8829 Printed in the USA

www.delfield.com 8031\_DEL\_DSLHPT-G 05/25



# DSLHPT Heated Pass-Thru w/ Glass Doors

# **Delfield**°

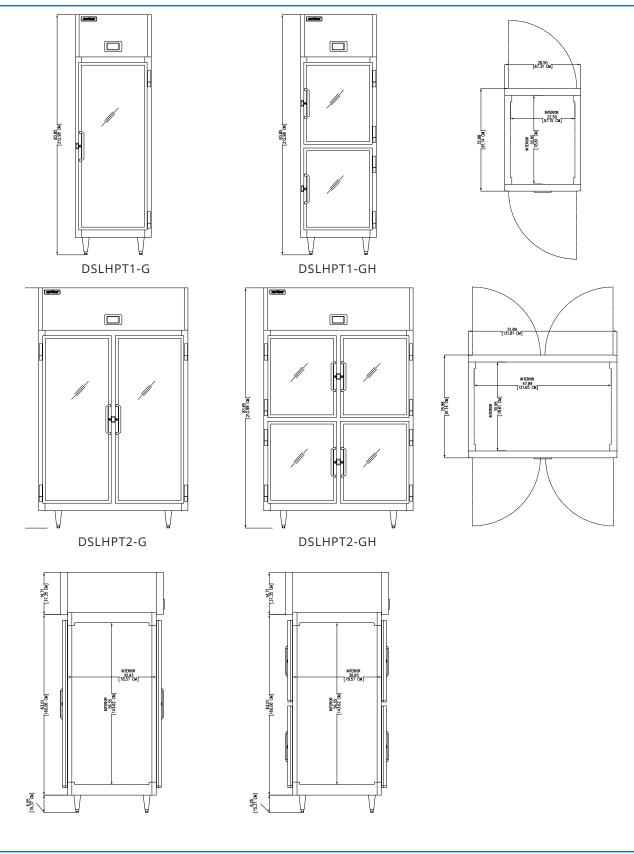

Welbilt reserves the right to make changes to the design or specifications without prior notice.





Specifications								
Model	V/Hz/Ph	Amps	Volume Cu. Ft.	SHELF CAPACITY SQ. FT.	No. of Shelves	Heater Watts	Ship Weight	Nema Plug
DSLHPT1-G DSLHPT1-GH	208-240/60/1	6.8	23.7	N/A	N/A	1500	535	6-20P
DSLHPT2-G DSLHPT2-GH	208-240/60/1	13	46.5	N/A	N/A	3000	620	6-20P

Welbilt reserves the right to make changes to the design or specifications without prior notice.

