





Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

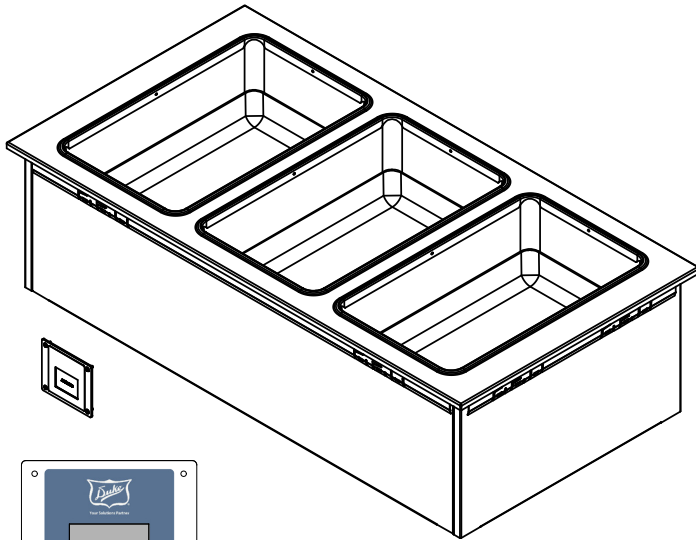

Model WWG3 Shown Above

OPTIONS:

- Hug Edge Top
- 3 Phase wiring (except WWG1)
- Designer Foodshields
- Telescope covers
- Adapter Plates
- Adapter Bars

Agency Listings:



NSF/ANSI 4

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1252 Drop In Ganged Waterless Well

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins - Hot Food

Electric Ganged Waterless Well

- WWG1 18 1/4"L x 24 1/4"W x 12 3/4"H
- WWG2 32 1/4"L x 24 1/4"W x 12 3/4"H
- WWG3 46 1/4"L x 24 1/4"W x 12 3/4"H
- WWG4 60 1/4"L x 24 1/4"W x 12 3/4"H
- WWG5 74 1/4"L x 24 1/4"W x 12 3/4"H
- WWG6 88 1/4"L x 24 1/4"W x 12 3/4"H

BODY:

- Heavy gauge, 300 Series stainless steel top
- Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- Die-stamped openings - 11-7/8" X 19-7/8"

Heat Compartments:

- 6-1/2" deep stainless steel liner for dry operation only
- Includes Silicone bottom pad
- Fully Insulated
- Rope element in each compartment

CONTROLS:

- Standard intuitive, easy to use touch screen control - One control for all wells
- Easily adjusted presets LOW/MED/HIGH
- Built in WIFI and Bluetooth for future connectivity.

EXTERIOR HOUSING:

- Heavy gauge paint grip steel

Specification subject to change





PRODUCT HOLDING UNIT - Ganged Waterless Well

Catalog No. Hot Holding




A.I.A. File No. 35-C-13

REV D 10/31/2025

Drop-IN Ganged Waterless Well

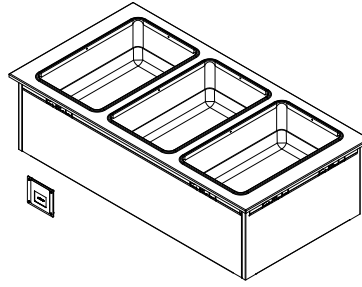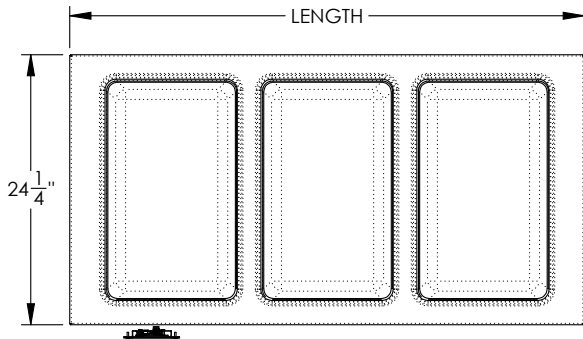


Control Specification

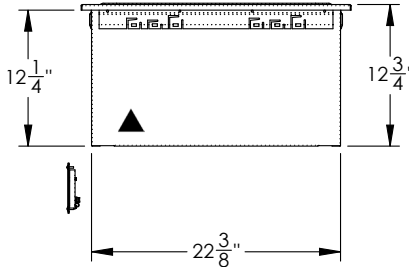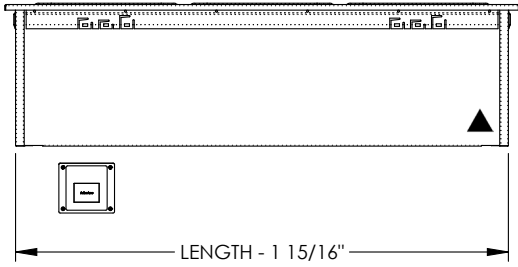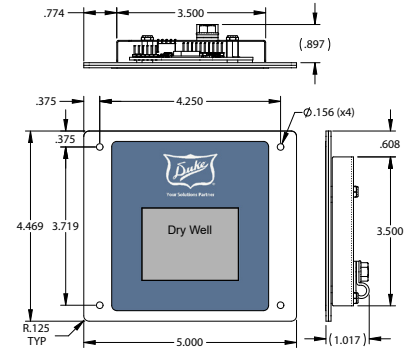

▲ Electrical Connection

Control Cutout

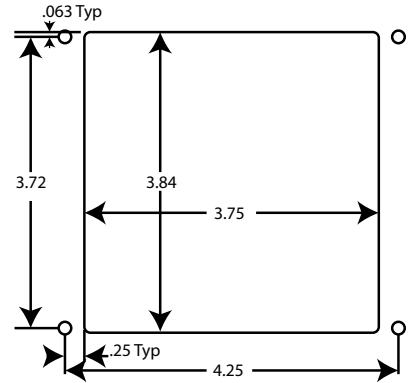

DIMENSIONS:

Model	Length		Width		Height		Top Openings	Cutout Length		Cutout Width		Control Panels	Cube ft. Crated	Crated Ship Weight	
	in	cm	in	cm	in	cm		in	cm	in	cm			lbs	kg
WWG1	18.25	46.4	24.25	61.6	12.75	32.4	1	17.0	43.2	23.0	58.4	1	8.2	43	19.6
WWG2	32.25	81.9	24.25	61.6	12.75	32.4	2	31.0	78.7	23.0	58.4	1	13.0	75	34.1
WWG3	46.25	117.5	24.25	61.6	12.75	32.4	3	45.0	114.3	23.0	58.4	1	17.7	90	40.9
WWG4	60.25	153.0	24.25	61.6	12.75	32.4	4	59.0	149.9	23.0	58.4	1	22.5	115	52.3
WWG5	74.25	188.6	24.25	61.6	12.75	32.4	5	73.0	185.4	23.0	58.4	1	27.2	140	63.6
WWG6	88.25	224.2	24.25	61.6	12.75	32.4	6	87.0	221.0	23.0	58.4	1	32.0	220	100.0

Freight Class: 100

ELECTRICAL SPECIFICATIONS:

Model	120V 665W			208V 500W			240V 665W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
WWG1	749	6.2	5-15	584	2.8	6-20	749	3.1	6-20
WWG2	1414	11.8	5-15	1084	5.2	6-20	1414	5.9	6-20
WWG3	2083	17.4	L5-30	1588	7.6	6-20	2083	8.	6-20
WWG4	2748	22.9	L5-30	2088	10	6-20	2748	11.5	6-20
WWG5	3417	28.5	5-50	2592	12.5	6-20	3417	14.2	6-20
WWG6	N/A	N/A	N/A	3092	14.9	L6-30	4082	17.0	L6-30



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com