

REFRIGERATED SELF-SERVICE HIGH PROFILE MODEL ERSSHP-378SC ERSSHP-478SC ERSSHP-678SC




Designed with impulse sales in mind. Get maximum return with presentation and value in mind without sacrificing performance. Available in lengths of 3', 4', and 6', and 78" high.

STANDARD FEATURES

- Adjustable black metal shelves with price tag molding. Shelves can be flat or slanted.
- Top mounted shielded light and vertical lights.
- Black powder coated exterior. Galvanized steel back.
- Black powder coated interior.
- Condensate evaporator provided for a totally self-contained system.
- Insulated with high-density urethane foam.
- Refrigeration controls maintain 40° F. Note: Case temperature will vary if the air curtain is disrupted.
- Thermometer.
- UL Safety and UL Sanitation Listed.
- Cord and plug.
- Front condensing unit air discharge.

ELEMENTS™ REFRIGERATEDSELF-SERVICE MERCHANDISER

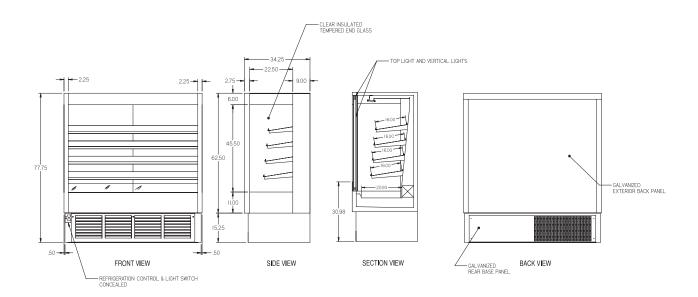

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Shelving	Self-Contained 3-Wire Plus Ground 120/208-240/60/1	Remote 120/60/1
ERSSHP-378SC	37" x 34 1/4" x 78"	835	4 (15" x 34")	1/2 HP - 10 AMPS	12 AMPS
ERSSHP-478SC	48" x 34 1/4" x 78"	925	4 (15" x 45")	3/4 HP - 13 AMPS	12 AMPS
ERSSHP-678SC	72" x 34 1/4" x 78"	1,220	8 (15" x 34")	1 HP - 15 AMPS	13 AMPS

- Case temperature will vary if the air curtain is disrupted.
- Electrical Requirement The minimum circuit ampacity and maximum fuse size is 20 amps. A 120/208-240 volt, 60 hertz, 1 phase, 3 wire plus ground power supply.
- Refrigerated cases are designed to operate in a maximum of 75° F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.





Look to Federal for Innovative Merchandising



Federal Industries A Standex Company 215 Federal Avenue Belleville WI 53508-9201 Phone: 800-356-4206

Fax: 608-424-3234

Email: geninfo@federalind.com Web Site: www.federalind.com