

COUNTERTOP REFRIGERATED DISPLAY CASE SELF-CONTAINED CONDENSING UNIT



ESC59R

ESC Series



Refrigeration System

- Right mounted self-contained condensing unit uses environmentally friendly, EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP).
- Rear condenser airflow intake and side louver exhaust promote efficient ventilation.
- Top to bottom evaporator tubes provide balanced cooling. Triple-looped and nickel plated copper tubing. Bottom coil is located under the interior flooring.
- Corrosion-resistant condenser coil.
- Electronically commuted (ECM) condenser fan motor achieve rapid cooling with less energy consumption.
- Removable and washable condenser coil air filter.
- Exterior on/off power switch.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction

- Wide single piece, curved glass display window.
- Open spaced interior with no walls between compartments.
- Heavy duty, ABS plastic exterior casing.
- Black coated steel housing for condensing unit.
- Stainless steel floor interior has rounded corners and two drain holes for ease of cleaning.
- High density, foamed-in-place insulation.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- 6 3/4" high removable sliding glass doors for storage accessibility and ease of cleaning.

Trays

- Durable plastic trays have two mounting styles which offer medium to low temperature coverage.

Temperature Control

- Factory preset temperature of 38°F at an ambient temperature of 80°F. (no controls equipped)
- NSF certified thermometer.



| Type | Doors | Capacity Cu. Ft. | # of Pans (Top) | # of Pans (Drawer) | Shelves | Refrigerant | HP | Power V-Hz-Ph | Amps | Crated Weight | Exterior Dimensions | | |
|------|-------|---------------------|--------------------|-----------------------|---------|-------------|-----|------------------|------|------------------|---------------------|-----|---------|
| | | | | | | | | | | | L | D | H* |
| REF | 2 | 2 | - | - | - | R-290 | 1/8 | 115-60-1 | 1.5 | 112 lbs | 59" | 14" | 11.125" |

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (‡) Product capacity is calculated based on standard industry figures. (*) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

COUNTERTOP REFRIGERATED DISPLAY CASE

SELF-CONTAINED CONDENSING UNIT



ESC59R

ESC Series


DIMENSIONAL DATA

| | | |
|--------------------|----------|------------|
| External Dims. | L | 59 in. |
| | D | 14 in. |
| | H* | 11.125 in. |
| Crated Weight | 112 lbs. | |
| Doors/Drawers/Lids | 2 | |
| Max Weight Support | - | |

STORAGE DATA

| | |
|-----------------------------------|---|
| Net Capacity Cu. Ft. [†] | 2 |
| Shelves | - |
| Barrels | - |
| 20 oz. Bottles | - |
| 12 oz. Bottles | - |
| 12 oz. Cans | - |
| 8" Mugs | - |
| # of Pans (Top) | - |
| # of Pans (Drawer) | - |
| Dividers | - |
| Trays | 4 |

ELECTRICAL DATA

| | |
|----------------------|--|
| Voltage | 115-60-1 |
| Full Load Amperage | 1.5A |
| Feed Wires w/ Ground | 3 |
| Cord Length | 9ft |
| NEMA Plug Type |  NEMA 5-15P |

REFRIGERATION DATA


| | |
|---------------------|-------|
| Compressor | Right |
| Refrigerant | R-290 |
| Compressor HP | 1/8 |
| BTU/HR [†] | 1211 |

KEY

| | | | |
|-----------|------------|-------------|---------------|
| D | Door | R | Refrigerator |
| L | Lid | REF | Refrigerator |
| H | Half Door | F | Freezer |
| FD | Full Door | FRZ | Freezer |
| SD | Solid Door | DUAL | REF/FRZ Combo |
| GD | Glass Door | DR | Drawer |


| | | | | | |
|--|-----------|-------|------|----|------|
|  | Elevation | Right | Plan | 3D | Back |
| | | | | | |

PLAN VIEW

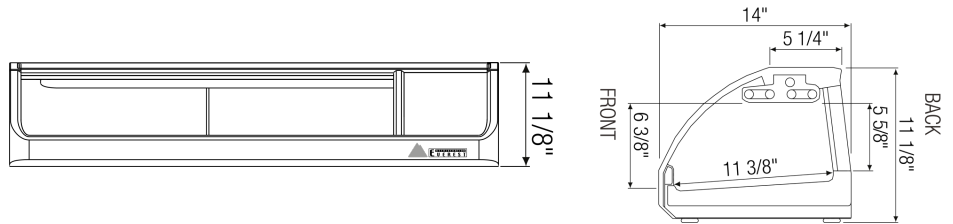

FRONT

SIDE

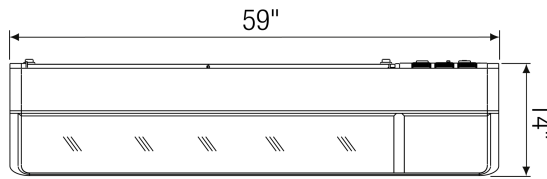

TOP

ACCESSORIES & OPTIONS

([†])Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). ([‡]) Product capacity is calculated based on standard industry figures. (^{*}) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.