

COUNTERTOP REFRIGERATED DISPLAY CASE SELF-CONTAINED CONDENSING UNIT



ESC83L

ESC Series



Refrigeration System

- Left mounted self-contained condensing unit uses environmentally friendly, EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP).
- Rear condenser airflow intake and side louver exhaust promote efficient ventilation.
- Top to bottom evaporator tubes provide balanced cooling. Triple-looped and nickel plated copper tubing. Bottom coil is located under the interior flooring.
- Corrosion-resistant condenser coil.
- Electronically commuted (ECM) condenser fan motor achieve rapid cooling with less energy consumption.
- Removable and washable condenser coil air filter.
- Exterior on/off power switch.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction

- Wide single piece, curved glass display window.
- Open spaced interior with no walls between compartments.
- Heavy duty, ABS plastic exterior casing.
- Black coated steel housing for condensing unit.
- Stainless steel floor interior has rounded corners and two drain holes for ease of cleaning.
- High density, foamed-in-place insulation.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- 6 3/4" high removable sliding glass doors for storage accessibility and ease of cleaning.

Trays

- Durable plastic trays have two mounting styles which offer medium to low temperature coverage.

Temperature Control

- Factory preset temperature of 38°F at an ambient temperature of 80°F. (no controls equipped)
- NSF certified thermometer.



Type	Doors	Capacity Cu. Ft.	# of Pans (Top)	# of Pans (Drawer)	Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
											L	D	H*
REF	4	3	-	-	-	R-290	1/8	115-60-1	1.5	165 lbs	82.625"	14"	11.125"

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (‡) Product capacity is calculated based on standard industry figures. (*) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

COUNTERTOP REFRIGERATED DISPLAY CASE SELF-CONTAINED CONDENSING UNIT



ESC83L

ESC Series


DIMENSIONAL DATA

External Dims.	L	82.625 in.
	D	14 in.
	H*	11.125 in.
Crated Weight		165 lbs.
Doors/Drawers/Lids		4
Max Weight Support		-

STORAGE DATA

Net Capacity Cu. Ft. \blacktriangleright	3
Shelves	-
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	-
12 oz. Cans	-
8" Mugs	-
# of Pans (Top)	-
# of Pans (Drawer)	-
Dividers	-
Trays	6

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	1.5A
Feed Wires w/ Ground	3
Cord Length	9ft
NEMA Plug Type	 NEMA 5-15P

REFRIGERATION DATA



Compressor	Left
Refrigerant	R-290
Compressor HP	1/8
BTU/HR [†]	1211

KEY

D	Door	R	Refrigerator
L	Lid	REF	Refrigerator
H	Half Door	F	Freezer
FD	Full Door	FRZ	Freezer
SD	Solid Door	DUAL	REF/FRZ Combo
GD	Glass Door	DR	Drawer


	Elevation	Right	Plan	3D	Back

PLAN VIEW

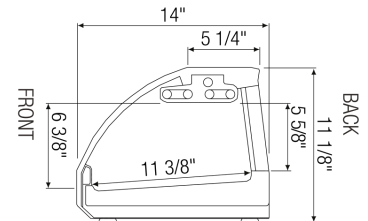

FRONT

SIDE

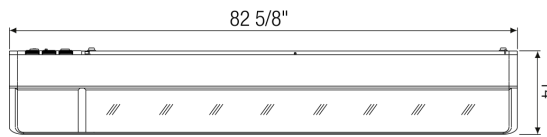

TOP

ACCESSORIES & OPTIONS

([†])Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (\blacktriangleright) Product capacity is calculated based on standard industry figures. (^{*}) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.