



### 4-Z-SC

Height 43.25"  
Length 46"  
Depth 35.5"

### 6-Z-SC

Height 43.25"  
Length 70"  
Depth 35.5"

### 8-Z-SC

Height 43.25"  
Length 94"  
Depth 35.5"

### 10-Z-SC

Height 43.25"  
Length 118"  
Depth 35.5"

## Features



- White interior and exterior
- Heavy duty gravity coil with expansion valve installed
- Top and bottom gravity coils
- Foamed in place high density CFC free polyurethane foam insulation
- 1 row double bracket stainless steel lit shelf
- Extra large triple pane hermetically sealed glass display front
- Service side – large multi pane easy glide sliding glass doors upper section
- Self contained heavy duty 134a condensing unit
- 10' wire power cord and plug
- 12 AMP convenience outlet separate circuit

Model No.	Description	Voltage	Amps	Temp	HP	Est. Ship Weight
4-Z-SC	2 Sliding/1 Hinged	115	8	34°F - 39°F	1/4	365#
6-Z-SC	2 Sliding/2 Hinged	115	10	34°F - 39°F	1/3	680#
8-Z-SC	2 Sliding/2 Hinged	115	10	34°F - 39°F	1/2	815#
10-Z-SC	4 Sliding/3 Hinged	115	12	34°F - 39°F	1/2	940#

# Technical Data / Deli Cases - Low





Model #	4-Z-SC	6-Z-SC	8-Z-SC	10-Z-SC
<b>Outside Dimensions</b>				
Depth	35.5"	35.5"	35.5"	35.5"
Length	46"	70"	94"	118"
Height	43.25"	43.25"	43.25"	43.25"
Door Size	16.5" x 14.5" 20.25" x 19.25"	28.75" x 14.5" 20.25" x 19.25"	40.75" x 14.5" 28.5" x 19.25"	25.75" x 21.5" 28.5" x 19.25" 20.25" x 19.25"
Door Type	2 sliding 1 swing	2 sliding 2 swing	2 sliding 2 swing	4 sliding 3 swing
<b>Inside Dimensions</b>				
Depth	26.5"	26.5"	26.5"	26.5"
Length	42.38"	66.538"	90.5"	114.38"
Height	37"	37"	37"	37"
Rows of Shelves	1	1	1	1
Capacity: Cubic Foot	23	34	46	58
<b>Specifications</b>				
Operating Temperature	32°F-39°F	32°F-39°F	32°F-39°F	32°F-39°F
Refrigerant	134a	134a	134a	134a
Compressor Size HP	1/4	1/3	1/2	1/2
Penn Pressure control setting at 75° at 55%	Cut in 40 Cut out 15	Cut in 40 Cut out 15	Cut in 40 Cut out 15	Cut in 40 Cut out 15
Ranco Pressure control setting at 75° at 55%	Cut in 35 Cut out 25	Cut in 35 Cut out 25	Cut in 35 Cut out 25	Cut in 35 Cut out 25
Defrost per day (24hours)	2@2hrs	2@2hrs	2@2hrs	2@2hrs
Voltage	115	115	115	115
Amperage	8.0	10.0	10.0	12.0
Cord and Plug	yes	yes	yes	yes
<b>Shipping Dimensions</b>				
Depth	40"	40"	40"	40"
Length	52"	76"	100"	124"
Height	46.5"	46.5"	46.5"	46.5"
Gross Weight lbs.	365	680	815	940#
Cubic feet	56	82	108	133

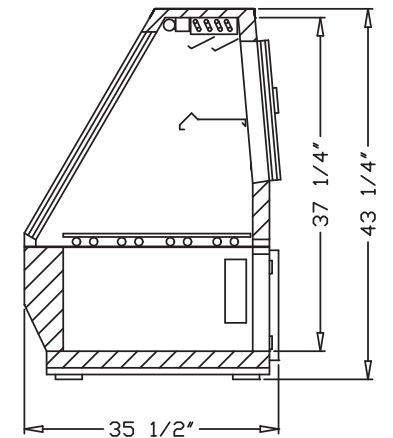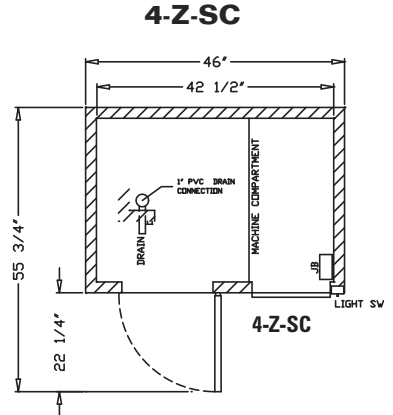

- Cases are designed to operate at 75°F and 55% relative humidity.
- Specification subject to change without notice.

## Customer View

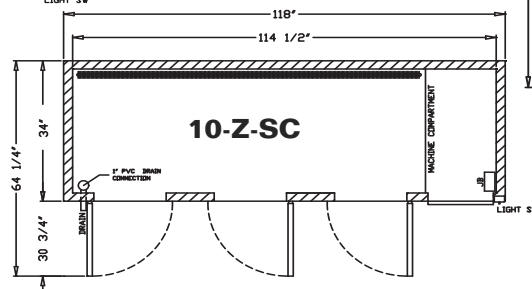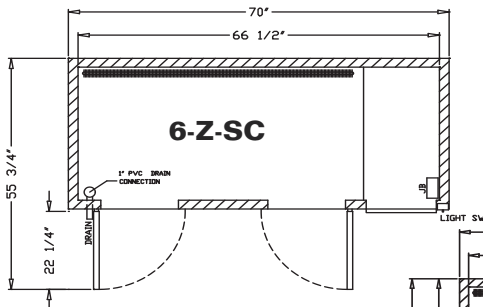

## Rear View

