

Reach In Refrigerators - Top Mount



SKT-22

Height w/casters 82.5"
Length 28"
Depth 34.5 "



SKT-30

Height w/casters 82.5"
Length 35.25"
Depth 34.5 "



SKT-74

Height w/casters 82.5"
Length 84.63"
Depth 34.5 "

Features



- Stainless steel doors and exterior sides
- Heavy duty hinge with self closing mechanism
- Stainless steel floor
- Aluminum interior
- Recessed handle with cylinder lock
- Heavy duty epoxy coated shelves
- Robust body with 2-1/2" thick walls, injected with CFC-free polyurethane
- Control panel with temperature display, door ajar light, power indicator condensing switch
- 5" casters
- Door locks
- Self contained heavy duty 134a condensing unit
- Forced air evaporator for rapid temperature "Pull Down"
- 10' power cord

Model No.	Description	Voltage	Amps	Temp	HP	Est. Ship Weight
SKT-22	1 Door/3 Shelves	115	6.6	32°F - 39°F	1/3	280#
SKT-30	1 Door/3 Shelves	115	7	32°F - 39°F	1/3	290#
SKT-48	2 Doors/6 Shelves	115	10	32°F - 39°F	1/2	474#
SKT-74	3 Door/9 Shelves	115	12.7	32°F - 39°F	1/2	603#

Technical Data / Reach In Refrigerators



Model #	SKT-22	SKT-30	SKT-48	SKT-74
Outside Dimensions				
Depth w/drain	34.5"	34.5"	34.5"	34.5"
Length	28"	35.25"	56.63"	84.63"
Height with casters	82.5"	82.5"	82.5"	82.5"
Door Size	25.75" x 60.75"	32.75" X 60.75"	25.75" x 60.75"	25.75" x 60.75"
Door Type	1 swing	1 swing	2 swing	3 swing
Inside Dimensions				
Depth	29.5"	29.5"	29.5"	29.5"
Length	22.75"	29.75"	51.125"	79"
Height	58"	58"	58"	58"
Shelf Size	21.75" x 27"	29.188 x 28"	24" x 25.625	24" x 25.625 (8) 26.13" x 5.63"(4)
# of Shelves	3	3	6	9
Capacity: Cubic Foot	22	30	50	77
Specifications				
Operating Temperature	32°F-39°F	32°F-39°F	32°F-39°F	32°F-39°F
Refrigerant	134a	134a	134a	134a
Compressor Size HP	1/3	1/3	1/2	1/2
Voltage	115	115	115	115-208/230
Amperage	6.6	7.0	10.0	12.7
Cord and Plug	yes	yes	yes	yes
Shipping Dimensions				
Depth	42"	42"	42"	42"
Length	32"	42"	63"	89"
Height	88"	88"	88"	88"
Gross Weight lbs.	280	290	474	603
Cubic feet	68	89	135	190

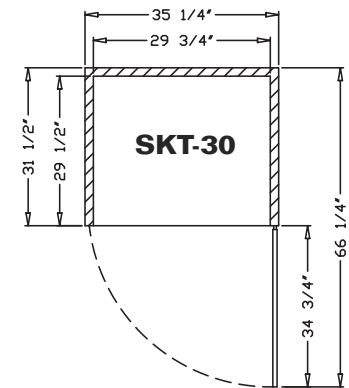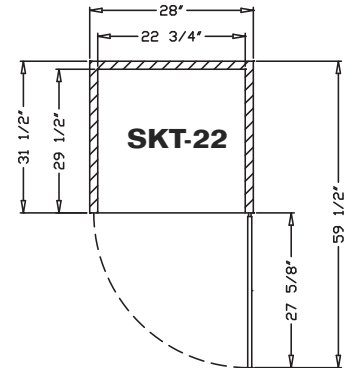

- Cases are designed to operate at 75°F and 55% relative humidity.
- Specification subject to change without notice.

