



5004-SC

Height 52"
Length 48"
Depth 35.5"

5006-SC

Height 52"
Length 72"
Depth 35.5"

5008-SC

Height 52"
Length 96"
Depth 35.5"

5010-SC

Height 52"
Length 120"
Depth 35.5"

Features



- White interior and exterior
- Heavy duty gravity coil with expansion valve installed
- Top and bottom gravity coils
- Foamed in place high density CFC free polyurethane foam insulation
- 2 rows double bracket stainless steel lit shelves
- Extra large triple pane hermetically sealed glass display front
- Service side – large multi pane easy glide sliding glass doors upper section
- Self contained heavy duty 134a condensing unit
- 10' wire power cord and plug
- 12 AMP convenience outlet separate circuit

Model No.	Description	Voltage	Amps	Temp	HP	Est. Ship Weight
5004-SC	2 Sliding/1 Hinged	115	8	34°F - 39°F	1/3	421#
5006-SC	2 Sliding/2 Hinged	115	9	34°F - 39°F	1/2	729#
5008-SC	2 Sliding/2 Hinged	115	12	34°F - 39°F	1/2	902#
5010-SC	4 Sliding/3 Hinged	115	12	34°F - 39°F	3/4	1069#


Technical Data / Deli Cases





Model #	5004-SC	5006-SC	5008-SC	5010-SC
Outside Dimensions				
Depth	35.5"	35.5"	35.5"	35.5"
Length	48"	72"	96"	120"
Height	52"	52"	52"	52"
Door Size	16.25" x 21.5" 20.25" x 19.25"	28.75" x 21.5" 20.25" x 19.25"	40.75" x 21.5" 28.5" x 19.25"	25.75" x 21.5" 28.5" x 19.25" 20.25" x 19.25"
Door Type	2 sliding 1 swing	2 sliding 2 swing	2 sliding 2 swing	4 sliding 3 swing
Inside Dimensions				
Depth	26.5"	26.5"	26.5"	26.5"
Length	42.38"	66.38"	90.38"	114.38"
Height	46"	46"	46"	46"
Rows of Shelves	2	2	2	2
Capacity: Cubic Foot	29	44	58	73
Specifications				
Operating Temperature	32°F-39°F	32°F-39°F	32°F-39°F	32°F-39°F
Refrigerant	134a	134a	134a	134a
Compressor Size HP	1/3	1/2	1/2	3/4
Penn Pressure control setting at 75° at 55%	Cut in 40 Cut out 15	Cut in 40 Cut out 15	Cut in 40 Cut out 15	Cut in 40 Cut out 15
Ranco Pressure control setting at 75° at 55%	Cut in 35 Cut out 25	Cut in 35 Cut out 25	Cut in 35 Cut out 25	Cut in 35 Cut out 25
Defrost per day (24 hours)	2@2hrs	2@2hrs	2@2hrs	2@2hrs
Voltage	115	115	115	115
Amperage	8.0	9.0	12.0	12.0
Cord and Plug	yes	yes	yes	yes
Shipping Dimensions				
Depth	40"	40"	40"	40"
Length	52"	76"	100"	124"
Height	55.75"	55.75"	55.75"	55.75"
Gross Weight lbs.	421	740	902	1069
Cubic feet	67	98	129	160

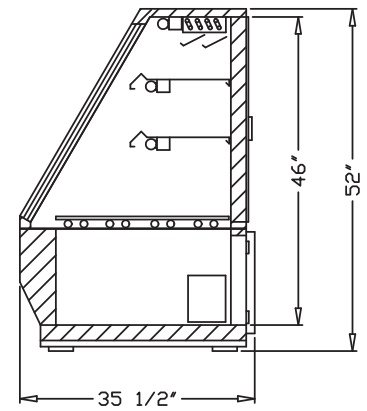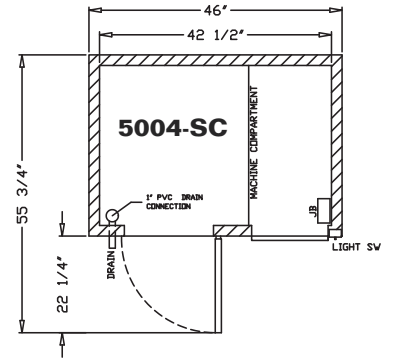

- Cases are designed to operate at 75°F and 55% relative humidity.
- Specification subject to change without notice.

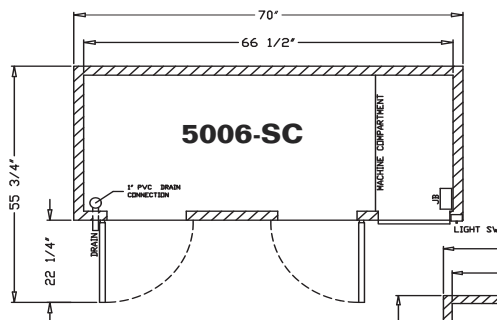

Customer View

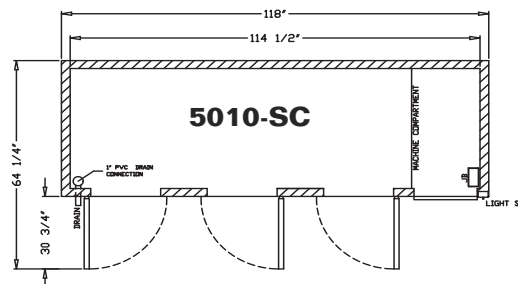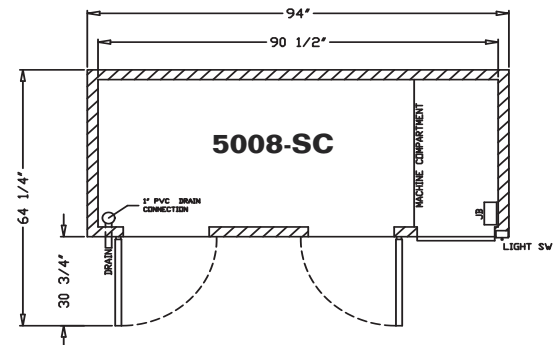

Rear View

