

Back Bar - Solid Doors



MR-15-US

Height 36.5"
Length 56.25"
Depth 25"



MR-25-US

Height 36.5"
Length 69.13"
Depth 25"



MR-30-US

Height 36.5"
Length 90.13"
Depth 25"

Features


- 24" deep stainless steel top
- Pre painted black steel exterior
- Pre painted white galvanized steel interior
- Self closing doors with safety stop at 120 degrees and recessed handles
- Door locks
- Heavy duty lift off chrome plated hinges
- Adjustable epoxy coated wire shelves
- Foamed in place high density CFC free polyurethane foam insulation provides a solid structure and low energy consumption
- Forced air evaporator for rapid temperature "Pull Down"
- Self contained heavy duty 134a condensing unit
- Incandescent interior light
- UL Classified to ANSI/NSF 7

Model No.	Description	Voltage	Amps	Temp	HP	Est. Ship Weight
MR-15-US	2 Door/4 Shelves	115	6.5	33°F - 41°F	1/4	335#
MR-25-US	2 Door/5 Shelves	115	8.7	33°F - 41°F	1/4	452#
MR-30-US	3 Door/ 7 Shelves	115	10.6	33°F - 41°F	1/3	530#

Technical Data / Back Bar - Solid Doors



Model #	MR-15-US	MR-25-US	MR-30-US
Outside Dimensions			
Depth w/bumper	25"	25"	25"
Length	56.25"	69.13"	90.13"
Height	36.5"	36.5"	36.5"
Door Size	31.38"x19.25"	31.63"x22.5"	31.63"x22.5"
Door Type	2 swing	2 swing	3 swing
Inside Dimensions			
Depth	19.88"	19.88"	19.88"
Length	52.25"	65.13"	86.13"
Height	31.69"	31.69"	31.69"
Shelf Size	(1) 32"x17.25" (3) 18.125"x17.25"	(3) 24"x 17.25" (1) 26.19"x 17.25" (1) 12.69"x 17.25"	(3) 21.75" x 17.25" (3) 24" x 17.25" (1) 12.69"x 17.25"
# of Shelves	4	5	7
Capacity: Cubic Foot	14.5	19	26
Specifications			
Operating Temperature	33°F-41°F	33°F-41°F	33°F-41°F
Refrigerant	134a	134a	134a
Compressor Size HP	1/4	1/4	1/3
Voltage	115	115	115
Amperage	6.5	8.7	10.6
Cord and Plug	yes	yes	yes
Shipping Dimensions			
Depth	30"	30"	30"
Length	65"	75"	95"
Height	42"	42"	42"
Gross Weight lbs.	335	452	530
Cubic feet	40	54	70

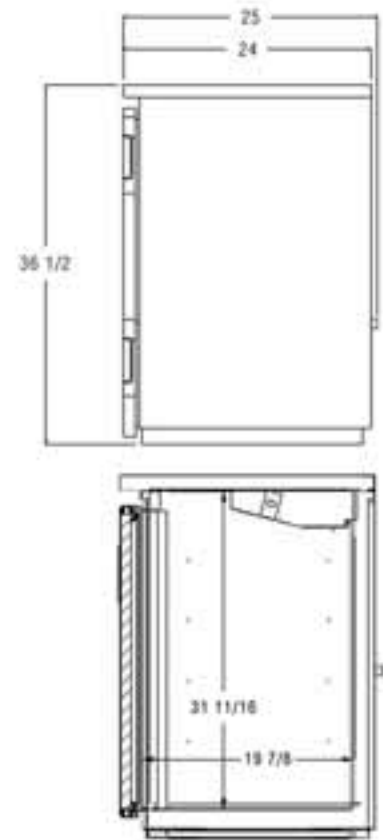

- Cases are designed to operate at 75°F and 55% relative humidity.
- Specification subject to change without notice.

