

Undercounters Refrigerators with Drawers

FUR/FUF Series *New!*

- FUR-27-D2-N
- FUR-48-D2-N
- FUR-60-D2-N
- FUR-72-D2-N
- FUR-48-D4-N
- FUR-60-D4-N
- FUR-72-D4-N
- FUR-72-D6-N



Item # _____

Standard Features

- Our new “Next Generation” undercounters have been completely re-designed to ensure proper temperature even in **100 deg. environments.**
- Exclusive base design for over **30% greater interior** capacity than most in it’s class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Covered corner floor to meet NSF requirements.
- Drawers: Heavy duty drawer slides with gentle self closing mechanism, full length recessed drawer handles; accomodates: 27” & 60” models (1) 12” x 20” x 6” deep pan per drawer / 48” x 72” models (1) 12” x 18” x 6” deep box or (1) 1/2 & (1) 1/3 pan (pans and box sold separately).
- Doors: Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket.
- Front breathing refrigeration system for built-in applications.
- 36” high working height / 2-1/2” casters (opt.) for 34” high applications.



FUR-27-D2-N



FUR-60-D4-N



FUR-72-D6-N



*Conforms to UL & NSF-7 standards

Options & Accessories

- Epoxy coated shelves with clips
- 2-1/2 casters (set of 4, front 2 w/ brakes)
- Removable 4” back splash.
- Single & Double tier overshelf
- 220 volts / 50 cycles / 1 phase

Undercounters Drawers	Model	Door	Drawers	Shelves	HP	Volts	Amps	Capacity (cu. ft.)	Cord Length	Cabinet Dimensions			Shipping (Wt. / Cubes)	
										W	D*	H	Wt.	Cubes
	FUR-27-D2-N	0	2	0	1/6	115	2.7	9.5	8'	27-3/4"	30-1/8"	35-3/4"	220	21
	FUR-48-D2-N	1	2	2	1/4	115	3.8	16.7	8'	48-3/8"	30-1/8"	35-3/4"	309	35
	FUR-48-D4-N	0	4	0	1/4	115	3.8	16.7	8'	48-3/8"	30-1/8"	35-3/4"	329	35
	FUR-60-D2-N	1	2	2	1/4	115	3.8	20.6	8'	60-3/8"	30-1/8"	35-3/4"	363	47
	FUR-60-D4-N	0	4	0	1/4	115	3.8	20.6	8'	60-3/8"	30-1/8"	35-3/4"	383	47
	FUR-72-D2-N	2	2	4	1/4	115	3.8	25.4	8'	72-1/2"	30-1/8"	35-3/4"	433	56
	FUR-72-D4-N	1	4	2	1/4	115	3.8	25.4	8'	72-1/2"	30-1/8"	35-3/4"	453	56
	FUR-72-D6-N	0	6	0	1/4	115	3.8	25.4	8'	72-1/2"	30-1/8"	35-3/4"	473	56

* Depth does not include 1” bumper.

Undercounters Refrigerators with Drawers

FUR/FUF Series



Specifications FUR/FUF Series

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Door is heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Drawer is heavy duty stainless steel with heavy duty drawer slides, self closing with a gentle close. Accommodates: 27" & 60" models (1) 12" x 20" x 6" deep pan per drawer / 48" x 72" models (1) 12" x 18" x 6" deep box or (1) 1/2 & (1) 1/3rd pan (pans and box sold separately).

Doors and Drawers provided with magnetic door gaskets, removable without tools, self-closing. Doors with 120° stay open feature / Drawers are full extension. Recessed full length handles.

Door / Drawer openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38° F in the interior cabinet during normal operations. Analog thermostat.

Shelving

(2) Epoxy coated shelving per door with channel slides for supports. Adjustable in 1/2" increments per shelf.


Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard with 5" diameter casters, front two with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

Drawers come standard with (2) pan dividers.

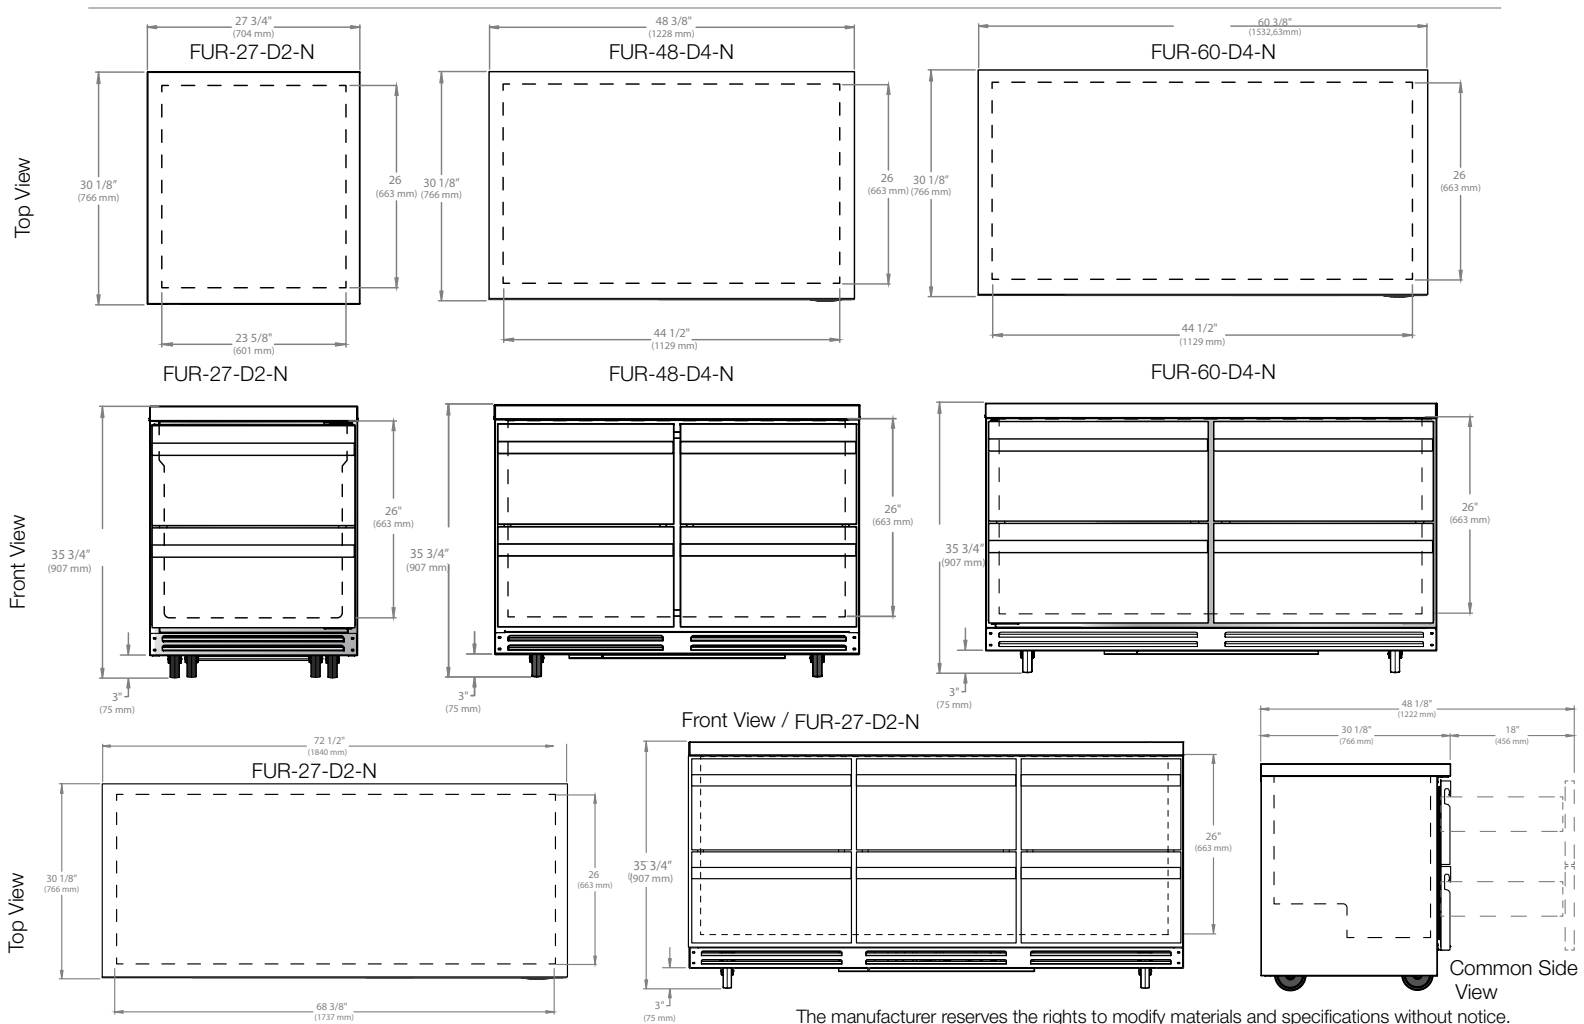

The manufacturer reserves the rights to modify materials and specifications without notice.

