

Undercounter Refrigerators & Freezers

FUR/FUF Series *New!*



- FUR-27-N
- FUR-36-N
- FUR-48-N
- FUR-60-N
- FUR-72-N
- FUF-27-N
- FUF-48-N
- FUF-60-N

Item # _____

Standard Features

- Our new “Next Generation” undercounters have been completely re-designed to ensure proper temperature even in **100 deg. environments.**
- Exclusive base design for over **30% greater interior** capacity than most in it's class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Covered corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; **interior step design** for added insulation and protection of door gasket.
- Factory balanced refrigeration system, environmentally friendly R-134A Refrigerators & R-290 Freezers.
- Front breathing refrigeration system for built-in applications.
- 36" high working height / 2-1/2" casters (opt.) for 34" high applications.



FUR(F)-27-N



FUR(F)-48-N



FUR-72-N



*Conforms to UL & NSF-7 standards

Options & Accessories

- Epoxy coated shevles with clips
- 2-1/2 casters (set of 4, front 2 w/ brakes)
- Removable 4" back splash.
- Single & Double tier overshelf
- 220 volts / 50 cycles / 1 phase

| | Model | Door | Capacity (Cu.Ft) | Shelves | Amps | HP | Voltage | Nema Plug | Cord Length | Cabinet Dimensions | | | Shipping (Wt. / Cubes) | |
|---------------------|----------|------|---------------------|---------|------|-----|---------|-----------|-------------|--------------------|---------|---------|---------------------------|----|
| | | | | | | | | | | L | D* | H | | |
| Refrigerator | FUR-27-N | 1 | 9.5 | 2 | 2.7 | 1/6 | 115 | 5-15P | 8' | 27-3/4" | 30-1/8" | 35-3/4" | 204 | 21 |
| | FUR-36-N | 2 | 13.1 | 2 | 2.7 | 1/6 | 115 | 5-15P | 8' | 36-3/8" | 30-1/8" | 35-3/4" | 258 | 33 |
| | FUR-48-N | 2 | 16.7 | 4 | 3.8 | 1/4 | 115 | 5-15P | 8' | 48-3/8" | 30-1/8" | 35-3/4" | 289 | 35 |
| | FUR-60-N | 2 | 20.6 | 4 | 3.8 | 1/4 | 115 | 5-15P | 8' | 60-3/8" | 30-1/8" | 35-3/4" | 343 | 47 |
| | FUR-72-N | 3 | 25.4 | 6 | 3.8 | 1/4 | 115 | 5-15P | 8' | 72-1/2" | 30-1/8" | 35-3/4" | 413 | 56 |
| Freezer | Model | Door | Capacity (Cu.Ft) | Shelves | Amps | HP | Voltage | Nema Plug | Cord Length | Cabinet Dimensions | | | Shipping (Wt. / Cubes) | |
| | | | | | | | | | | L | D* | H | | |
| | FUF-27-N | 1 | 9.5 | 2 | 2.5 | 1/4 | 115 | 5-15P | 8' | 27-3/4" | 30-1/8" | 35-3/4" | 204 | 21 |
| | FUF-48-N | 2 | 13.1 | 4 | 6.5 | 1/2 | 115 | 5-15P | 8' | 48-3/8" | 30-1/8" | 35-3/4" | 289 | 35 |
| | FUF-60-N | 2 | 16.7 | 4 | 6.5 | 1/2 | 115 | 5-15P | 8' | 60-3/8" | 30-1/8" | 35-3/4" | 343 | 47 |

* Depth does not include 1" bumper.

Undercounter Refrigerators & Freezers

FUR/FUF Series



Specifications FUR / FUF

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with covered corner floor. Door is heavy duty stainless steel exterior and interior, in step design with stainless steel hinges and positive seal. Provided with magnetic door gaskets, removable without tools, self-closing and with 120° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a Refrigerator / R-290a Freezers) Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38°F and freezers 0° to -5° F during normal operations. Digital controllers and thermostats on freezers, analog thermostats on refrigerators.

Shelving


(2) Epoxy coated shelving per door with clips. Adjustable in 1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

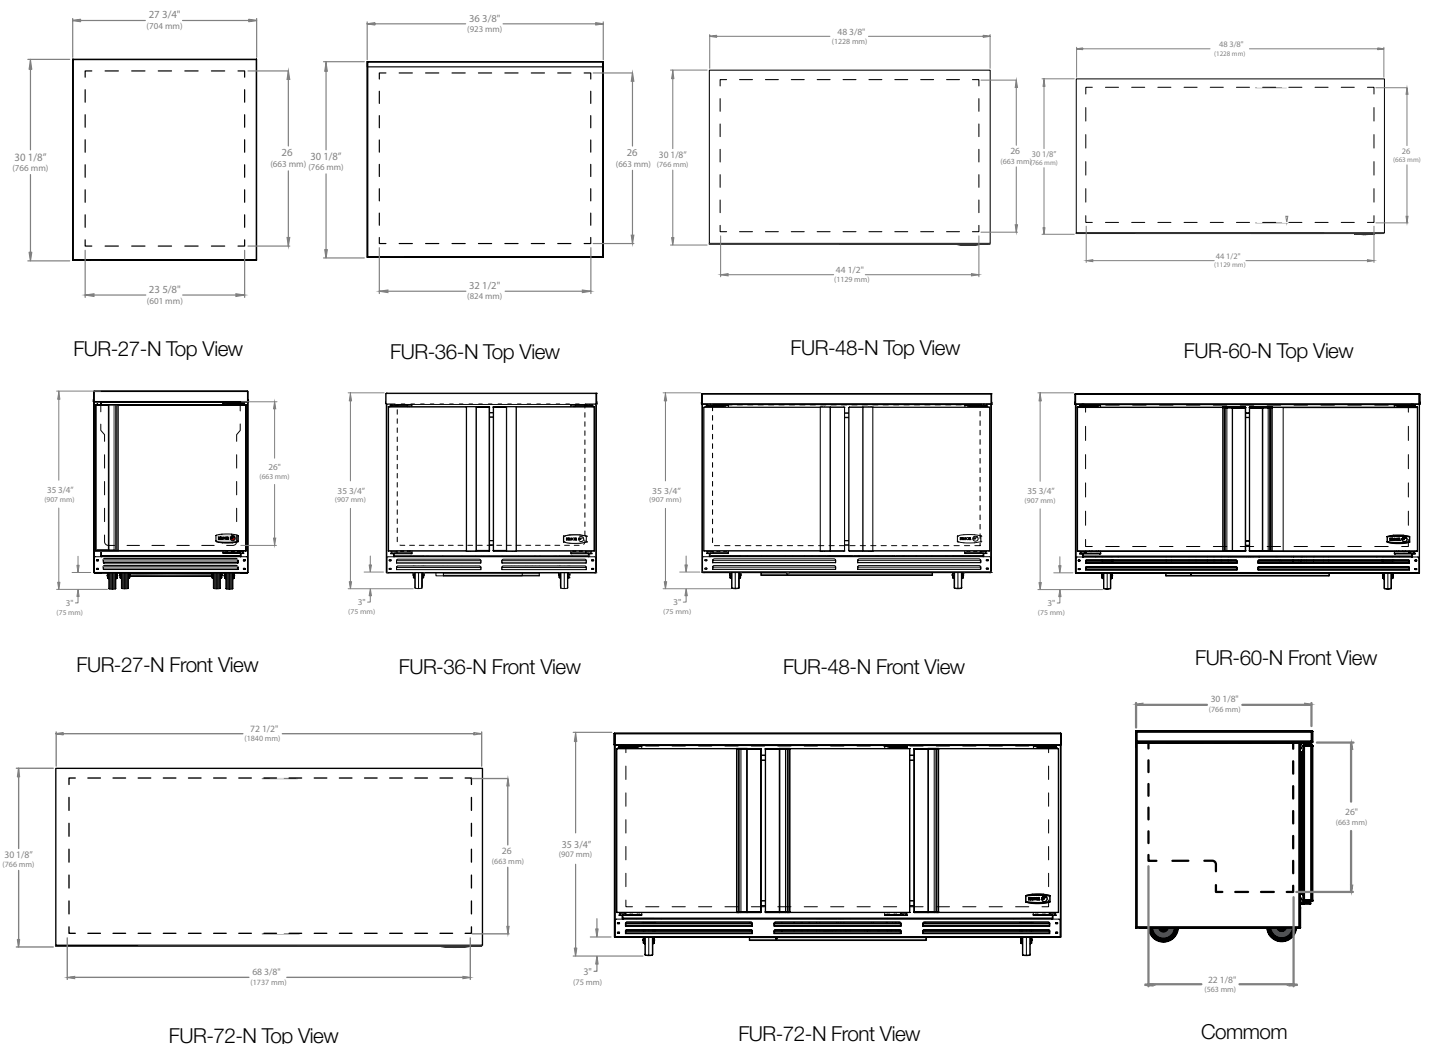

The manufacturer reserves the rights to modify materials and specifications without notice.

