

Worktop Refrigerator with Drawers

FWR/FWF Series *New!*

- FWR-27-D2-N
- FWR-48-D2-N
- FWR-60-D2-N
- FWR-72-D2-N
- FWR-48-D4-N
- FWR-60-D4-N
- FWR-72-D4-N
- FWR-72-D6-N



Item # _____

Standard Features

- Our new “Next Generation” undercounters have been completely re-designed to ensure proper temperature even in **100 deg. environments.**
- Exclusive base design for over **30% greater interior** capacity than most in it’s class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Drawers: Heavy duty drawer slides with gentle self closing mechanism, full length recessed drawer handles; accomodates: 27” & 60” models (1) 12” x 20” x 6” deep pan per drawer / 48” x 72” models (1) 12” x 18” x 6” deep box or (1) 1/2 & (1) 1/3 pan (pans and box sold separately).
- Doors: Heavy duty stainless steel door with full length recessed door handles; **interior step design** for added insulation and protection of door gasket.
- Front breathing refrigeration system for built-in applications.
- 36” high working height with 4” fixed backsplash / 2-1/2” casters (opt.) for 34” high applications.



FWR-27-D2-N



FWR-60-D4-N



FWR-72-D6-N



*Conforms to UL & NSF-7 standards

Options & Accessories

- Epoxy coated shevles with clips
- 2-1/2 casters (set of 4, front 2 w/ brakes)
- Single & Double tier overshef
- 220 volts / 50 cycles / 1 phase

Worktops with Drawers	Model	Door	Drawers	Shelves	HP	Volts	Amps	Capacity (cu. ft.)	Cord Length	Cabinet Dimensions			Shipping (Wt. / Cubes)	
										W	D*	H		
	FWR-27-D2-N	0	2	0	1/6	115	2.7	9.5	8'	27-3/4"	30-1/8"	39-5/8"	224	21
	FWR-48-D2-N	1	2	2	1/4	115	3.8	16.7	8'	48-3/8"	30-1/8"	39-5/8"	309	35
	FWR-48-D4-N	0	4	0	1/4	115	3.8	16.7	8'	48-3/8"	30-1/8"	39-5/8"	329	35
	FWR-60-D2-N	1	2	2	1/4	115	3.8	20.6	8'	60-3/8"	30-1/8"	39-5/8"	363	47
	FWR-60-D4-N	0	4	0	1/4	115	3.8	20.6	8'	60-3/8"	30-1/8"	39-5/8"	383	47
	FWR-72-D2-N	2	2	4	1/4	115	3.8	25.4	8'	72-1/2"	30-1/8"	39-5/8"	433	56
	FWR-72-D4-N	1	4	2	1/4	115	3.8	25.4	8'	72-1/2"	30-1/8"	39-5/8"	453	56
	FWR-72-D6-N	0	6	0	1/4	115	3.8	25.4	8'	72-1/2"	30-1/8"	39-5/8"	473	56

* Depth does not include 1" bump

Specifications FWR/FWF Series

Construction

Heavy duty stainless steel exterior top, 4" backsplash, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with covered corner floor. Door is heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Drawer is heavy duty stainless steel with heavy duty drawer slides, self closing with a gentle close. Accommodates: 27" & 60" models (1) 12" x 20" x 6" deep pan per drawer / 48" x 72" models (1) 12" x 18" x 6" deep box or (1) 1/2 & (1) 1/3rd pan (pans and box sold separately).

Doors and Drawers provided with magnetic door gaskets, removable without tools, self-closing. Doors with 120° stay open feature / Drawers are full extension. Recessed full length handles.

Door / Drawer openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38° F in the interior cabinet during normal operations. Analog thermostat.

Drawers come standard with (2) pan dividers.

Shelving


(2) Epoxy coated shelving per door with channel slides for supports. Adjustable in 1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard with 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

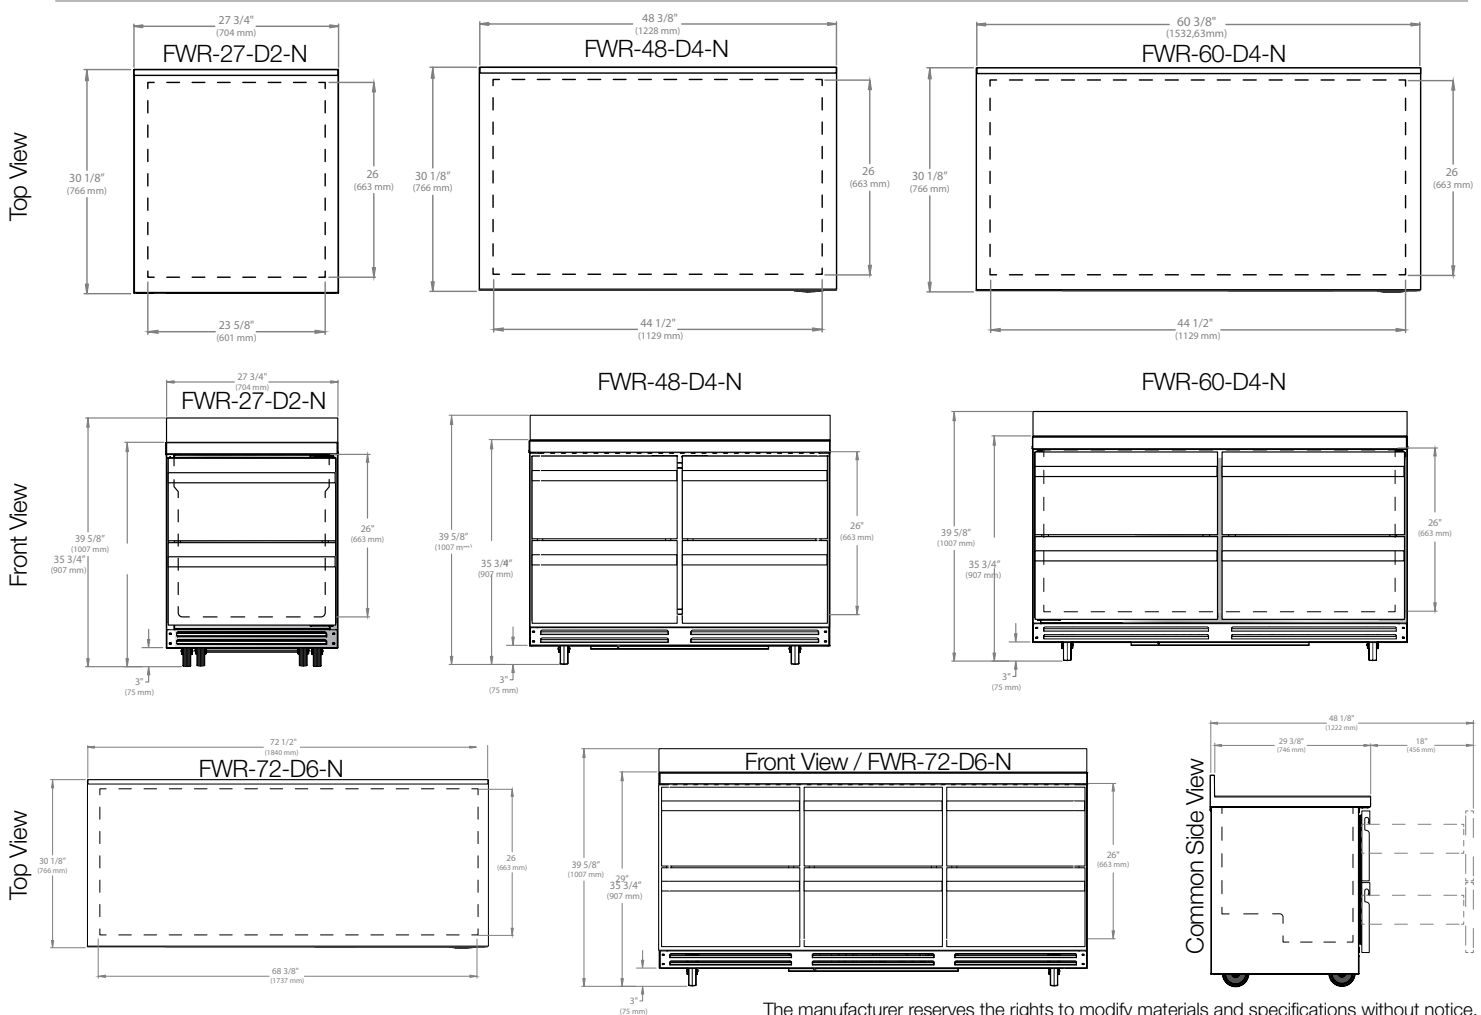

The manufacturer reserves the rights to modify materials and specifications without notice.

