



**Model #ADD-72SS**

**Cooling**

Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

**Electrical**

Voltage	115
Amps	4
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	96"

**Standard Features – Beer Dispenser Model #ADD-72SS**

- Holds (3) ½ kegs
- (2) Double tap towers
- Includes 4 "D" system keg couplers
- Foamed-in-place polyurethane insulation
- (4) epoxy-coated shelf
- Environmentally-safe R290 refrigerant
- LED lights illuminate interior
- (3) locking self-closing door with recessed handles
- 115V; 1/4 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7

**Construction**

Exterior Material	Black Coated Steel
Interior Material	Painted aluminum
Insulation Material	Foamed-In-Place Polyurethane
Shelf	(4) 19" x 18-1/4" (2) 20-1/2" x 18-1/2" epoxy-coated steel
Taps	(4) 10-1/4" faucet height

**Dimensions**

Exterior Dimensions	72-3/4"W x 24-3/8"D x 36-5/8"H
Interior Dimensions	60-1/8"W x 18-1/2"D x 28-7/8"H
Shipping Dimensions	75-1/4"W x 27-1/2"D x 41-3/4"H
Tower Dimensions	16" H 3" Diameter
Net Volume	21.6 cu. ft.
Net Weight	331 lb.
Gross Weight	374 lb.




Parts & Labor


Compressor

**PLAN VIEW**

**Front View**

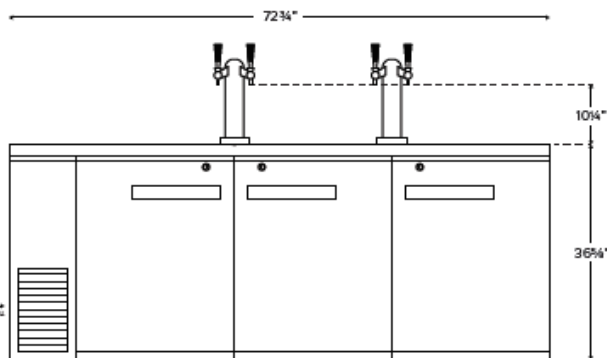

**Side View**

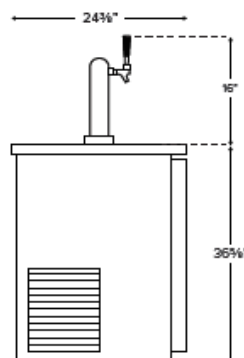

**Top View**

