Standard Features – Deli Case #ADC-163

- Exterior is stainless steel top, front with painted sides
- Interior stainless steel floor
- High humidity gravity coil refrigeration for optimal freshness
- Curved double pane thermal front glass
- "Low-E" double pane thermal glass inserts with plastic channel frames
- 12" long plastic handles on rear doors
- Foamed-in-place polyurethane insulation
- 21.9 cu. ft. interior
- (9) epoxy coated steel shelves
- Digital temperature controller
- 115V; 4/5 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7.

Construction

Exterior Material	Stainless top and front with painted sides
Interior Material	304 stainless steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(9) epoxy coated steel
Load Capacity	90 lb.

Model #ADC-163

Cooling

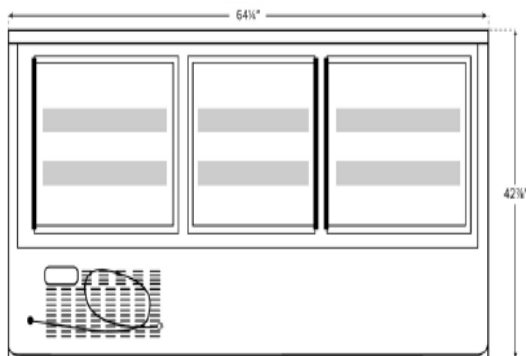|	
Temperature Range	33°F-40°F
Refrigerant	R-290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	4/5

Dimensions

Exterior Dimensions	64 1/4"W x 32-1/2"D x 42-7/8"H
Interior Dimensions	60 1/4"W x 26-3/4"D x 26-3/4"H
Shipping Dimensions	68"W x 36-1/4D x 48-3/4"H
Net Volume	21.9 cu. ft.
Net Weight	477 lb.
Gross Weight	568 lb.

Electrical

Voltage	115
Amps	3.37
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	84"

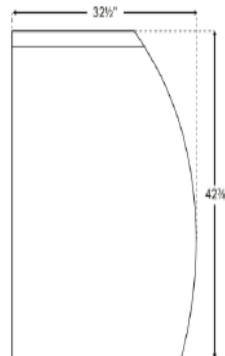ETL Listed Intertek   ETL Listed c us Intertek   2 YEAR WARRANTY Parts & Labor   5 YEAR WARRANTY Compressor

PLAN VIEW

BACK VIEW

SIDE VIEW

TOP VIEW