Standard Features – Beer Dispenser Model #ADD-4SS

- Holds (4) ½ kegs
- Double tap tower with 10-1/4" faucet height
- Includes 2 "D" system keg couplers
- Foamed-in-place polyurethane insulation
- (6) epoxy-coated shelf accommodates up to 90 lb.
- Environmentally-safe R290 refrigerant
- LED lights illuminate interior
- (3) locking self-closing door with recessed handles
- Side mounted compressor
- 115V; 1/4 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7.

Construction

Exterior Material	430 Stainless Steel
Interior Material	Painted aluminum
Insulation Material	Foamed-In-Place Polyurethane
Shelf	(6) epoxy–coated steel holds up to 90 lb.
Taps	(2) 10-1/4 faucet height

Model #ADD-4SS

Cooling

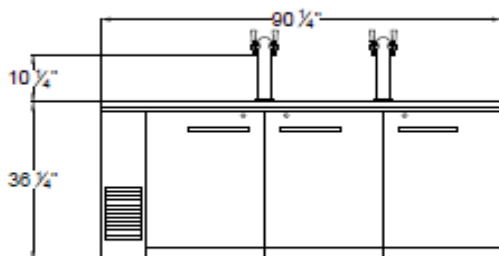|	
Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Dimensions

|	
Exterior Dimensions	90-1/4"W x 27-3/4"D x 36-1/4"H
Interior Dimensions	80"W x 23"D x 30"H
Shipping Dimensions	91-3/4"W x 30-1/2"D x 41-3/4"H
Tower Dimensions	16"H 3" Diameter
Net Volume	32 cu. ft.
Net Weight	364 lb.
Gross Weight	408 lb.

Electrical

Voltage	115
Amps	4.7
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	84"

ETL Listed Intertek   ETL c us Listed Intertek

2 YEAR WARRANTY — Parts & Labor   5 YEAR WARRANTY — Compressor

PLAN VIEW

Front View

Side View

Top View