



Model #AGF-50

Cooling

| | |
|--------------------------|-----------|
| Temperature Range | -5°F-2°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/4 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 3.3 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA-5-15P |
| Electrical Cord Length | 90" |

Standard Features – Glass Froster 50"

- Environmentally safe R290 refrigerant
- Durable stainless steel top
- Coated aluminum interior
- Corrosion resistant vinyl on steel black finish
- Foamed-in-place polyurethane insulation
- Sliding stainless steel door for easy access
- Easy to use digital controls
- Accommodates up to 250 mugs
- Removable installation board for easy access to condenser for cleaning
- Auto defrost
- 115V; 1/4 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7.

Construction

| | |
|---------------------|------------------------------|
| Exterior Material | Vinyl on steel black |
| Interior Material | Coated aluminum |
| Insulation Material | Foamed-In-Place Polyurethane |


Dimensions

| | |
|---------------------|------------------------|
| Exterior Dimensions | 50"W x 28-1/2"D x 33"H |
| Interior Dimensions | 45"W x 23"D x 26"H |
| Shipping Dimensions | 54"W x 30"D x 42"H |
| Net Volume | 12.2 cu. ft. |
| Net Weight | 181 lb. |
| Gross Weight | 224 lb. |




PLAN VIEW

Front View

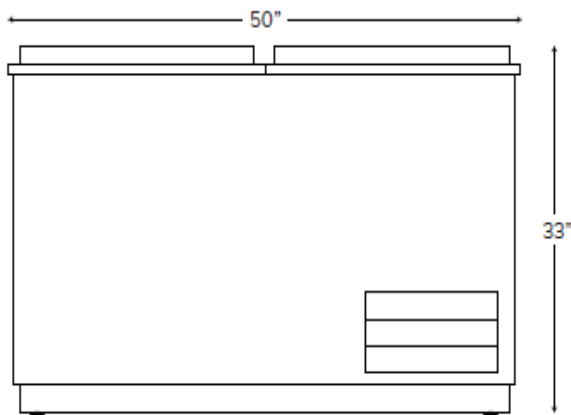

Side View

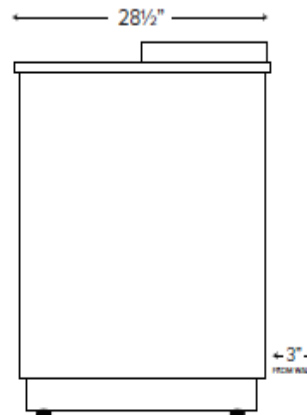

Top View

