

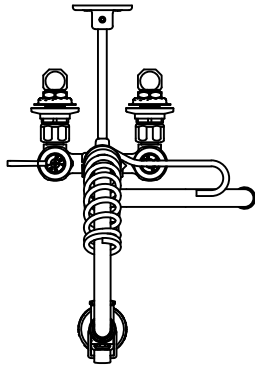
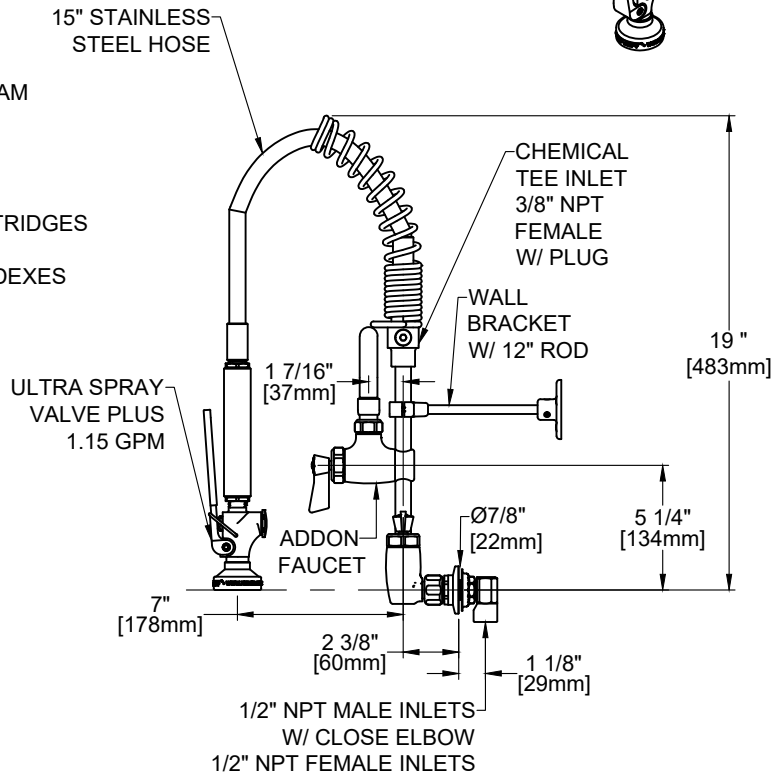


Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

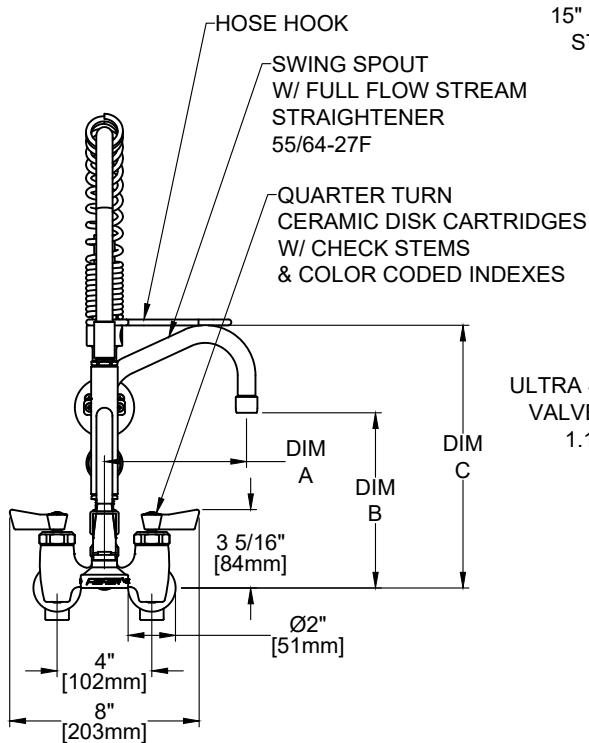

MODEL	DESCRIPTION	DIM A	DIM B	DIM C
95480	PRERINSE SLP 4BSCDLH 06SS EL	6" [152mm]	7 3/8" [188mm]	11 1/8" [282mm]
70220	PRERINSE SLP 4BSCDLH 12SS EL	12" [305mm]	9" [229mm]	12 11/16" [322mm]

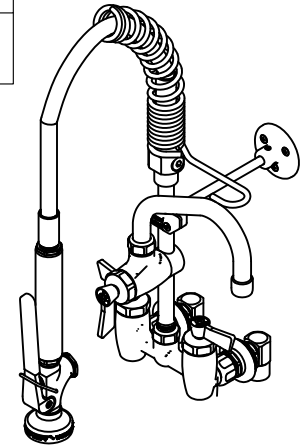


PRODUCT SPECIFICATIONS: 4" BACKSPLASH LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, CLOSE ELBOWS

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class II

Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:	Architect/Engineer:			

REPLACEMENT PARTS

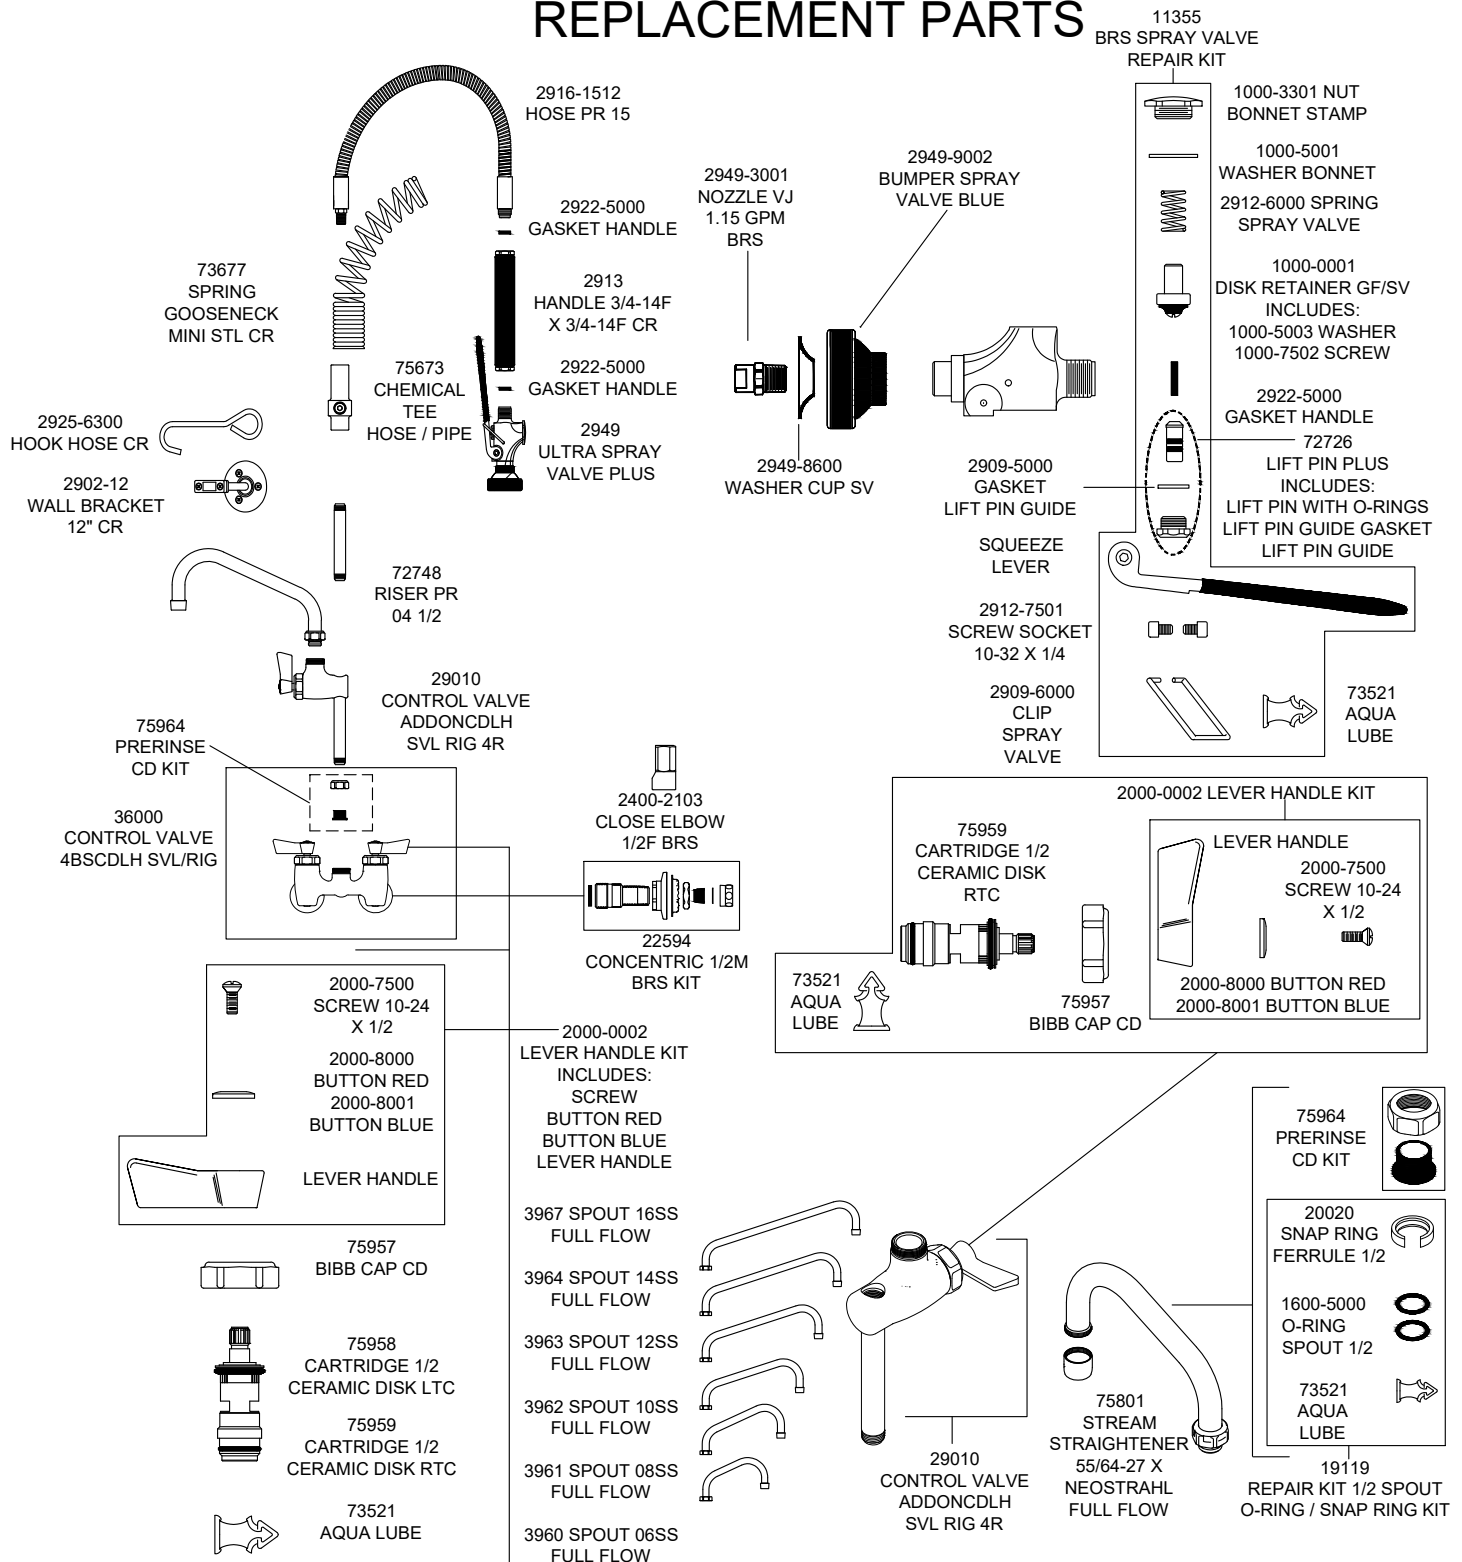

PRODUCT SPECIFICATIONS: 4" BACKSPASH LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, CLOSE ELBOWS

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class II