



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

GDIM Series - Glass Door Ice Merchandisers



GDIM-26

*TRUE is the world's largest manufacturer of
glass door merchandisers.*

Glass Door Reach-In Ice Merchandisers

- GDIM-26,** **GDIM-26NT,**
- GDIM-49,** **GDIM-49NT**

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Durable and permanent non-peel or chip white vinyl exterior.
- White, vinyl coated aluminum interior cabinet liner with 300 series stainless steel floor. Construction of liner in accordance with NSF standards. 12" basin to protect from melt-down of product.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection.
- Safety shielded fluorescent interior lighting. Integrated door light standard.
- Rear wall airflow guard and floor rack prevent frozen product from blocking optimal airflow.

DOORS:

- Triple pane thermal insulated glass. Doors extend for full view of product. Door gaskets of one piece construction.
- Adjustable, self closing, torsion type closure system. The face of each door fitted with a 12" long handle.

INSULATION:

- Entire cabinet structure insulated, using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Floor rack standard

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 20°F to 25°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Also available:

- Freezer Models
- Wine Merchandiser
- Rear Load Models
- Glass End Merchandisers
- Convenience Store Coolers
- Counter-Top Merchandisers
- Floral Merchandisers
- Radius Front Merchandisers

*Remote cabinets available 14% off list
(condensing units supplied by others).
Consult factory technical service dept. for BTU information.*

Specifications subject to change without notice.

Printed in
U.S.A.




APPROVALS:

2/03

Exceptions:



GDIM Series: Glass Door Ice Merchandisers

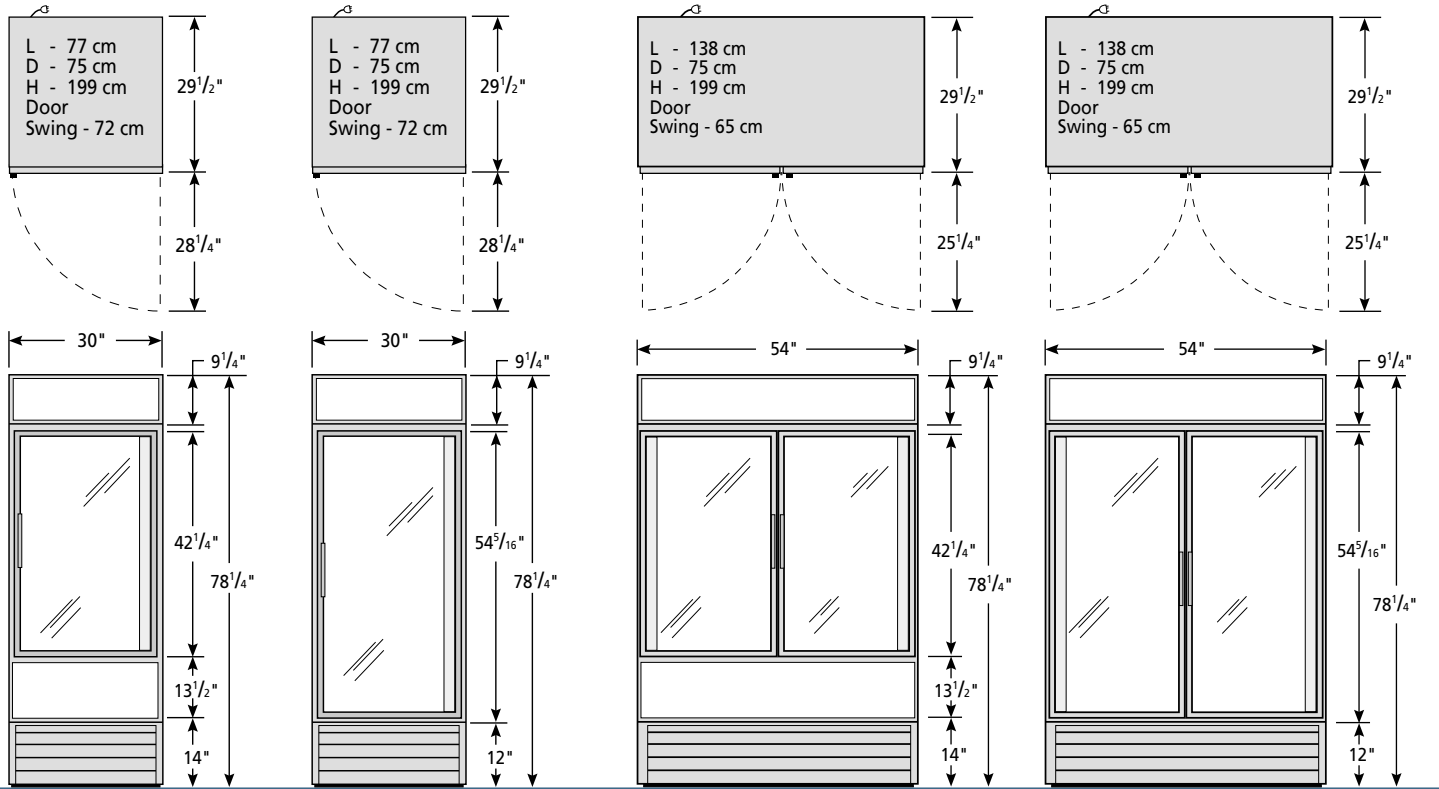

GDIM-26

GDIM-26NT

GDIM-49

GDIM-49NT

Rough-In Data

Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D*	H							
GDIM-26	1	26	floor rack	30	29 1/2	78 1/4	1/3	115	1	7.8	5-15	9	314
GDIM-26NT	1	26	floor rack	30	29 1/2	78 1/4	1/3	115	1	7.8	5-15	9	314
GDIM-49	2	49	floor rack	54	29 1/2	78 1/4	1/2	115	1	10.1	5-15	9	480
GDIM-49NT	2	49	floor rack	54	29 1/2	78 1/4	1/2	115	1	10.1	5-15	9	480

* Depth does not include 1 3/8" for door handle.

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly 134A refrigeration system - holds 20°F to 25°F.
- White laminated vinyl exterior (black, rosewood and walnut vinyl also available).
- White, vinyl coated aluminum interior and 300 series stainless steel bottom (NSF approved). 12" basin to protect from melt-down of product except "NT" models.
- Capacity - GDIM-26, (61 eight pound bags), GDIM-49, (132 eight pound bags) GDIM-26NT, (68 eight pound bags), GDIM-49NT, (144 eight pound bags).
- Triple pane thermal glass.
- Defrost system time initiated, temperature terminated.
- Automatic evaporator fan motor delay during defrost cycle.
- Minimum wattage heater in cabinet door frame.
- Fluorescent interior lighting.
- Integrated door light.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Positive seal, torsion type closure system, self-closing doors.
- Standard backguard and floor rack improve airflow.
- Epoxy coated evaporator.
- GDIM-26NT & GDIM-49NT standard without 12" basin to protect from melt-down of product.
- Bottom mount compressor.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.
- See our website www.truemfg.com for the latest color & sign offerings.

Optional Accessories

- Barrel locks available.
- Available with 2 1/2" diameter castors.
- Available with stainless steel or optional seismic legs.
- Remote models available.

Model	Front	Right	Plan	3D
	GDIM-26	TFRY02E	TFRY02S	TFRY02P
GDIM-26NT				
GDIM-49	TFRY05E	TFRY05S	TFRY05P	TFRY053
GDIM-49NT				

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
0 / 0	0 / 0	1 / 26



TRUE FOOD SERVICE EQUIPMENT