



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

**GDM Freezer Series -
Glass Door Merchandisers**



GDM-12F

*TRUE is the world's largest manufacturer of
glass door merchandisers.*

**Glass Door Reach-In Freezers -
Single Door**

- GDM-5F-PT**, **GDM-7F**, **GDM-10F**,
- GDM-12F**, **GDM-23F**, **GDM-26F**

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Durable and permanent non-peel or chip white vinyl exterior.
- White aluminum interior cabinet liner with 300 series stainless steel floor. Construction of liner in accordance with NSF standards.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection.
- Safety shielded fluorescent interior lighting. Integrated door light standard on GDM-23F and GDM-26F.
- Rear wall airflow guard and floor rack prevent frozen product from blocking optimal airflow (excludes GDM-5F-PT, GDM-7F).

DOORS:

- Triple pane thermal insulated glass. Doors extend full width of cabinet shell. Door gaskets of one piece construction.
- Adjustable, self closing, torsion type closure system with aluminum block supports. The face of each door fitted with a 12" long handle.

INSULATION:

- Entire cabinet structure insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Adjustable vinyl coated wire shelves included. Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free R404A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain -10°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to appropriate outlet (see diagram below and NEMA listing next page). A cord and plug set to be included.
- A sole use circuit is required.

Also available:

- **Slide Door Refrigerators**
- **Wine Merchandiser**
- **Rear Load Models**
- **Ice Merchandisers**
- **Glass End Merchandisers**
- **Convenience Store Coolers**
- **Counter-Top Merchandisers**
- **Floral Merchandisers**

Remote cabinets and condensing units available for models
GDM-23F, GDM-49F, and GDM-72F.
For other models
remote cabinets available 14% off list
(condensing units supplied by others).
Consult factory technical service dept. for BTU information.

GDM-5F-PT
GDM-7F
GDM-10F
GDM-12F
115/60/1
NEMA-5-15R



GDM-23F
GDM-26F
115/60/1
NEMA-5-20R



Specifications subject to change without notice.


Printed in
U.S.A.



APPROVALS:



GDM Series: Glass Door Freezers - Single Door

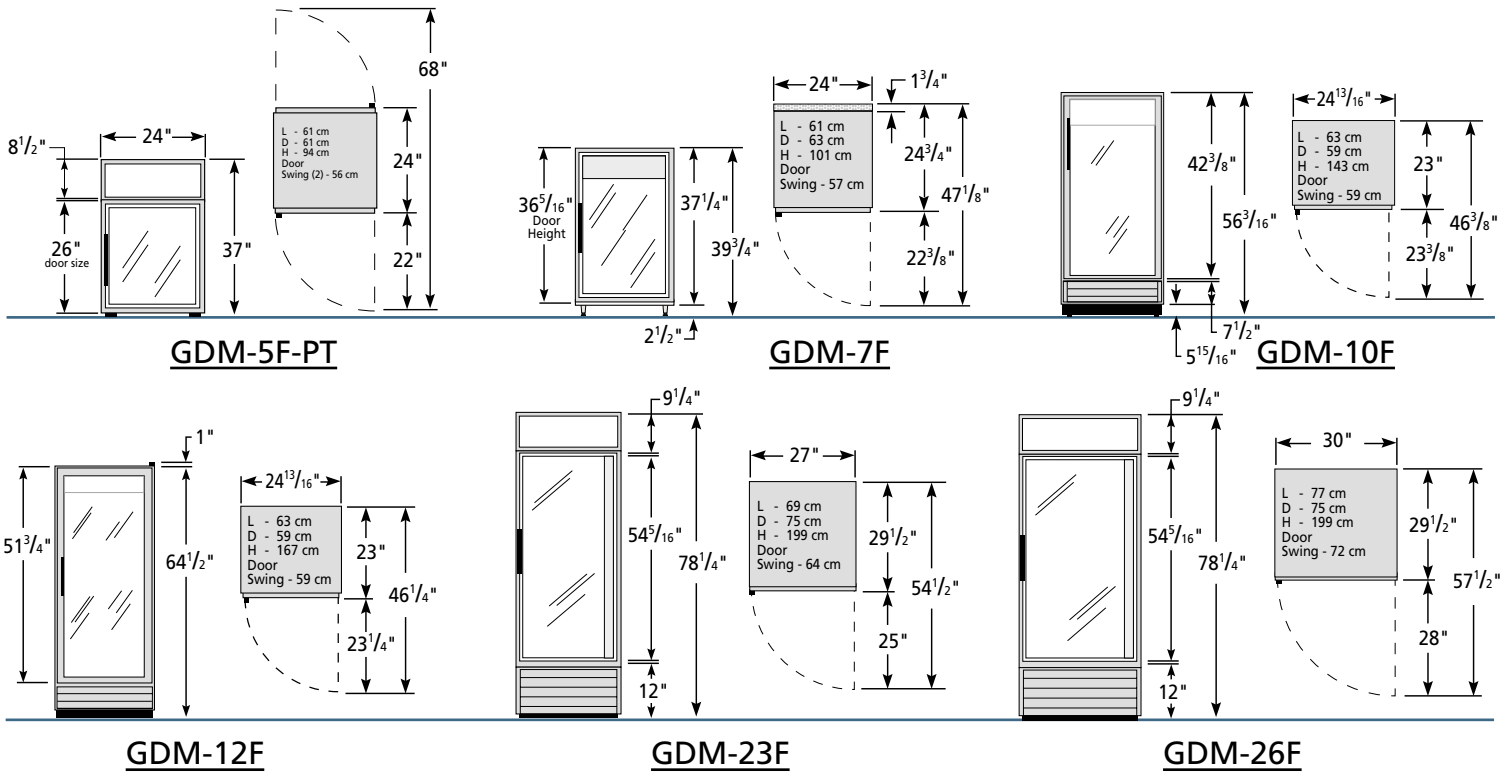

Rough-In Data													
Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D*	H							
GDM-5F-PT	2	5	2	24	24	37	1/2	115	1	9.8	5-15	9	220
GDM-7F	1	7	2 1/2	24	24 3/4	39 3/4	1/2	115	1	7.0	5-15	9	250
GDM-10F	1	10	3	24 13/16	23	56 3/16	1/2	115	1	8.8	5-15	9	275
GDM-12F	1	12	3	24 13/16	23	65 1/2	1/2	115	1	9.0	5-15	9	300
GDM-23F	1	23	4	27	29 1/2	78 1/4	3/4	115	1	12.2	5-20	9	412
GDM-26F	1	26	4	30	29 1/2	78 1/4	3/4	115	1	12.2	5-20	9	421

* Depth does not include 1 3/8" for door handle (GDM-5F-PT has handles front and back). Specifications subject to change without notice.
 Black, rosewood, and walnut vinyl exterior available at no extra charge.
 GDM-7F height includes 2 1/2" legs.

Standard Features

- Oversized and balanced, environmentally friendly R404A refrigeration system - holds -10°F.
- White laminated vinyl exterior.
- White, vinyl coated aluminum interior and 300 series stainless steel bottom (NSF approved).
- Standard backguard and floor rack improve airflow (excludes GDM-5F-PT, GDM-7F).
- Fluorescent interior lighting.
- Integrated door light on GDM-23F and GDM-26F models.
- Positive seal, torsion type closure system, self-closing doors.
- Adjustable vinyl coated wire shelves.
- Triple pane thermal glass.
- Epoxy coated evaporator.
- Large evaporator and coil heater permit short defrost cycle.
- Defrost system time initiated, temperature terminated.
- Automatic evaporator fan motor delay during defrost cycle.
- Bottom mount compressor.
- Slide out compressor can be serviced easily and accessed by a single repairman.

- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.
- See our website www.truemfg.com for the latest color & sign offerings.

Optional Accessories

- Black, walnut and rosewood vinyl exterior available.
- Novelty Baskets.
- Additional shelves available.
- 2 1/2" castors available for GDM-10F, GDM-12F, GDM-23F, GDM-26F.
- Stainless steel or optional seismic legs available for GDM-23F, GDM-26F.
- Remote available for GDM-23F.

Model	Front	Right	Plan	3D
GDM-5F-PT	TFD033E	TFD033S	TFD033P	TFDY333
GDM-7F	TFD020E	TFD020S	TFD020P	TFD0203
GDM-10F	TFAY57E	TFAY57S	TFAY57P	TFAY573
GDM-12F	TFAY57E	TFAY57S	TFAY57P	TFAY573
GDM-23F	TFAZ03E	TFAZ03S	TFAZ03P	TFAZ033
GDM-26F	TFAY09E	TFAY09S	TFAY09P	TFAY093

Clearance Required For Coolers (USA)		
Sides* Inches/mm	Top* Inches/mm	Rear Inches/mm
1 / 26	1 / 26	3 / 77

* GDM-5F-PT, GDM-7F & GDM-10F only.



TRUE FOOD SERVICE EQUIPMENT