



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

**GDM Series -
Glass Door Merchandisers
(slide door models)**



GDM-45

TRUE is the world's largest manufacturer of glass door merchandisers.

**Glass Door Reach-In Refrigerators
(slide door models)**

- GDM-33,** **GDM-37,** **GDM-41,**
- GDM-45,** **GDM-47,** **GDM-61,**
- GDM-69**

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Durable and permanent non-peel or chip rosewood vinyl exterior.
- White, vinyl coated aluminum interior cabinet liner with 300 series stainless steel floor. Construction of liner in accordance with NSF standards.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection.
- Safety shielded fluorescent interior lighting.

DOORS:

- Triple pane thermal insulated glass. Doors extend full view of product.
- Counter-balanced weight system; self closing doors. The face of each door fitted with a 12" long handle.

INSULATION:

- Entire cabinet structure insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- 4 adjustable vinyl coated wire shelves per door. Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Also available:

- **Swing Door Models**
- **Wine Merchandiser**
- **Rear Load Models**
- **Ice Merchandisers**
- **Glass End Merchandisers**
- **Convenience Store Coolers**
- **Counter-Top Merchandisers**
- **Floral Merchandisers**

Remote cabinets available 14% off list
(condensing units supplied by others).
Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.

Printed in
U.S.A.




APPROVALS:

2/03

Exceptions:



GDM Series: Glass Door Merchandisers - slide door

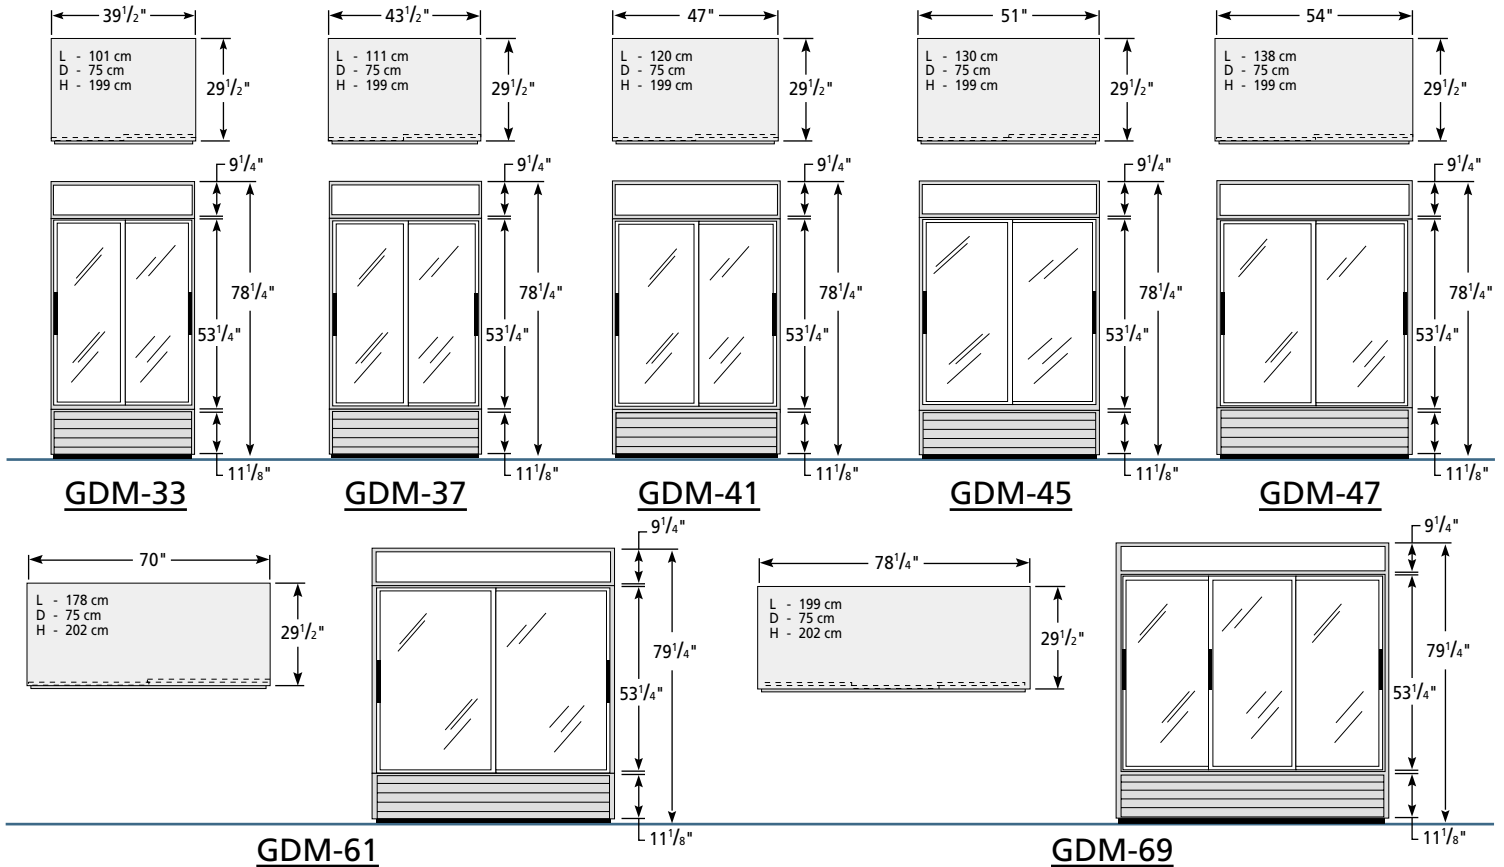

Rough-In Data													
Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D**	H							
GDM-33	2	33	8	39 1/2	29 1/2	78 1/4	1/2	115	1	9.2	5-15	9	404
GDM-37	2	37	8	43 1/2	29 1/2	78 1/4	1/2	115	1	8.9	5-15	9	428
GDM-41†	2	41	8	47	29 1/2	78 1/4	1/2	115	1	9.2	5-15	9	442
GDM-45	2	45	8	51	29 1/2	78 1/4	1/2	115	1	9.2	5-15	9	460
GDM-47*†	2	47	8	54	29 1/2	78 1/4	1/2	115	1	10.6	5-15	9	478
GDM-61	2	61	8	70	29 1/2	79 1/4	1/2	115	1	11.3	5-15	9	594
GDM-69†	3	69	12	78 1/4	29 1/2	79 1/4	1/2	115	1	12.0	5-15	9	664

**Depth does not include 1/4" for door handle.

* Available in rear load model

† Available in Glass End model

‡ Available in Slim Line model

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly 134A refrigeration system - holds 33°F to 38°F.
- Rosewood laminated vinyl exterior (white, walnut and black vinyl also available).
- White, vinyl coated aluminum interior and 300 series stainless steel bottom (NSF approved).
- Positive seal, self-closing doors.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Triple pane thermal insulated glass.
- Fluorescent interior lighting (safety shielded).
- Foamed-in-place polyurethane high density cell insulation.
- Bottom mount compressor.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.
- See our website www.truemfg.com for the latest color & sign offerings.

Optional Accessories

- Gravity-feed TrueTrac® shelving.
- Wine racks.
- Novelty Baskets.
- Additional shelves available.
- GDM-47 available as a rear load model (GDM-47RL).
- Ratchet door locks available.
- Available with 2 1/2" diameter castors.
- Available with stainless steel or optional seismic legs.
- Remote units also available.
- Wide variety of sign panels available.

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
0 / 0	0 / 0	1 / 26

Model	KCL				Model	KCL			
	Front	Right	Plan	3D		Front	Right	Plan	3D
GDM-33	TFAY08E	TFAY08S	TFAY08P	TFAY083	GDM-47	TFAY04E	TFAY07S	TFAY04P	TFAY043
GDM-37	TFAY07E	TFAY07S	TFAY07P	TFAY073	GDM-61	TFAY25E	TFAY02S	TFAY25P	TFAY253
GDM-41	TFAY06E	TFAY07S	TFAY06P	TFAY063	GDM-69	TFAY02E	TFAY02S	TFAY02P	TFAY023
GDM-45	TFAY05E	TFAY07S	TFAY05P	TFAY053					

TRUE FOOD SERVICE EQUIPMENT

