

GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

• PRODUCT SPECIFICATIONS SHEETS



- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

Self-Contained Remote	GR22 R-GR22	GR48 R-GR48	GR75 R-GR75	GR102 R-GR102
Length	26-1/2"	52-1/4"	78"	103-3/4"
Height with casters	83"	83"	83"	83"
Depth with drain cover (Dimensions are +/-1/4")	36-1/2"	36-1/2"	36-1/2"	36-1/2"

- Specification subject to change without notice

GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

Standard Specifications and Optional Features

CONSTRUCTION UL Classified to ANSI/NSF 7 Heavy duty construction CFC free foamed in place insulation Removable front grille for easy servicing 1, 2, 3 or 4 door models available Heavy duty edge mounted hinges	FINISHES Doors-Anthony style 101-chrome finish Exterior-designer white Interior-designer white Rear-designer white
INTERIOR White aluminum ends and back White aluminum floor Aluminum evaporator fan housing 4 Heavy duty epoxy coated shelves per door	REFRIGERATION Top mounted condensing unit R134a refrigeration 1, 2, & 3 door, Capillary tube 4 door-expansion valve Electric condensate pan Remote available
EXTERIOR White aluminum ends and fronts Double pane glass doors 23-3/4"X62-1/4" (provides wide view display) Externally mounted dial thermometer 5" Casters	LIGHTING Vertical light behind mullion 1 Dr = 1 light 2 Dr = 1 light 3 Dr = 2 lights 4 Dr = 3 lights
ELECTRICAL REQUIREMENTS 1,2,3 Door Units 115V/60Hz/1Ph Cord and plug 4 Door 115V/208-230V/60Hz/1Ph Unit must be hard wired UL/CUL listed	Important Note: All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity. Important Note: Product must be cooled before being displayed within the case.

OPTIONAL FEATURES

Stainless steel, laminate or paint Digital thermometer Door swing change	Extra shelf with clips Door locks 6" legs (black or stainless steel mount units only)
--	---



GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

Technical Data

Model	Self contained	GR22	GR48	GR75	GR102
	Remote	R-GR22	R-GR48	R-GR75	R-GR102
Length		26-1/2"	52-1/4"	78"	103-3/4"
Height		83"	83"	83"	83"
Depth		33-7/8"	33-7/8"	33-7/8"	33-7/8"
Depth with drain (Dimensions are +/- 1/4")		36-1/2"	36-1/2"	36-1/2"	36-1/2"
Operating temperature	Self contained	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F
Refrigerant		R134a	R134a	R134a	R134a
System type		Capillary tube	Capillary tube	Capillary tube	Expansion valve
Compressor size- HP	Self contained	1/3	1/3	1/2	3/4
Refrigeration system	Remote	Temp. control	Temp. control	Temp. control	Pressure control
BTU's at +20°F Evap. Temp.		1700	3100	4400	5900
Voltage		115V	115V	115V	115/208-230V
Amperage	Self contained	10.2A	11.0A	13.8A	6.4/7.1A
Amperage	Remote	2.6A	3.4A	4.1A	6.4A
Cord and plug		Yes(15A)	Yes(15A)	Yes(20A)	No
Exterior color		White	White	White	White
Interior color		White	White	White	White
Inside end panels		White	White	White	White
Floors		White	White	White	White
Drain Electric Condensate		Yes	Yes	Yes	Yes
Total shelves		4	8	12	16
Door size		23-3/4"X62-1/4"	23-3/4"X62-1/4"	23-3/4"X62-1/4"	23-3/4"X62-1/4"
Cubic capacity (ft ³)		22	48	75	102


SHIPPING INFORMATION

Height		82"	82"	82"	82"
Width		44"	44"	44"	44"
Depth		31"	58"	84"	109"
Gross weight	Self contained	330#	520#	720#	980#
	Remote	215#	405#	595#	830#
Cubic feet		77ft ³	125ft ³	182ft ³	236ft ³

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Specification subject to change without notice

GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

Technical Data • Side View • Plan View

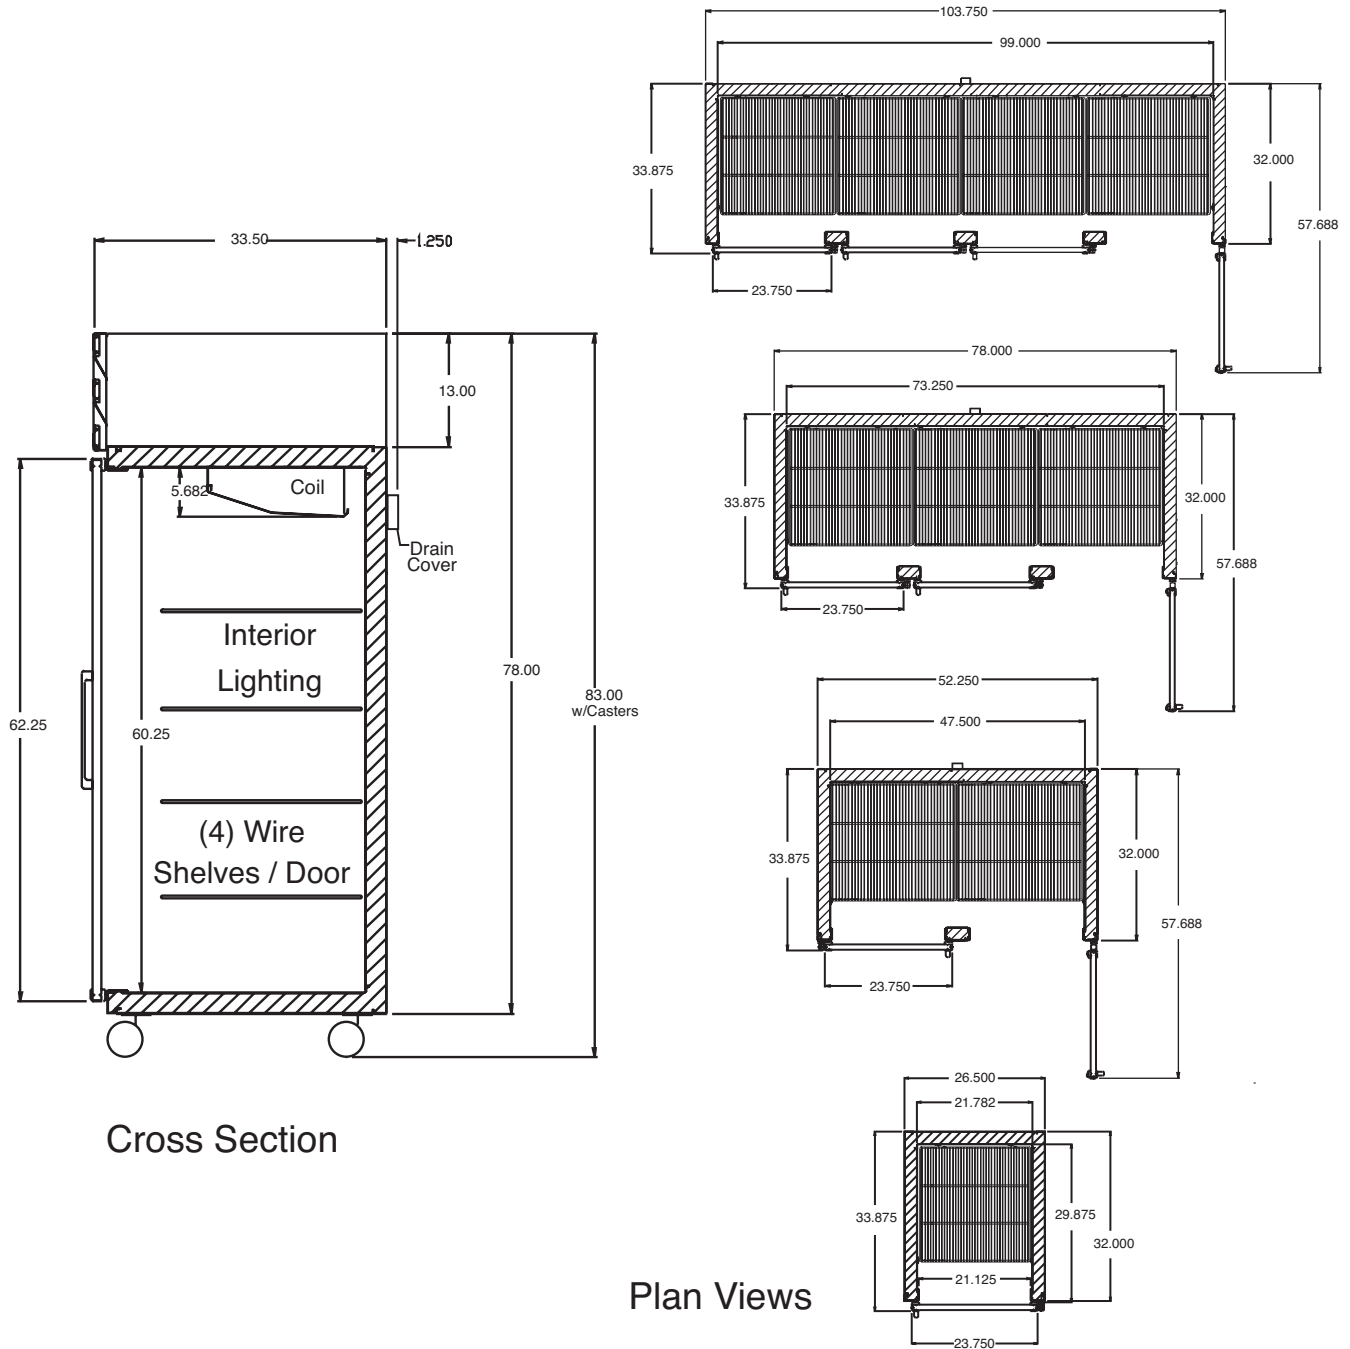

Cross Section

Plan Views