# **GARLAND**

# 36E Series Heavy-Duty All-Purpose Hot Top Range

Project
Item
Quantity
CSI Section 11400
Approved
Date

#### Models

- 36ER32
- 36ES32



Model 36ER32 All Purpose Top Range With 2 Sections, 3 heat zones

#### Standard Features

- · Stainless steel front and sides
- Stainless steel front rail
- Chrome-plated, 4-position removable rack guides w/oven rack
- Electro-mechanical heavy-duty oven thermostat
- 36" (914mm) all purpose work top area controlled by 3 thermostats, 290°/650°F (143°/343°C)
- · 3" (76mm) high stainless steel vent
- Heat-resistant, cool-to-touch oven door handle
- 6" (152mm) adjustable chrome-plated
- 1-year limited parts & labor (USA &

## Options & Accessories

### · Stainless steel main back (R&S

- models)
- · Extra oven rack
- Swivel casters complete with front brakes (4)
- 6" (152mm) adjustable stainless steel
- High voltage 460V
- · Marine equipment storm rails for pots, hand rails, oven door latch, drip tray stop and deck fasteners

NOTE: Ranges supplied with casters must be installed with an approved restraining device.

# Specifications

Heavy-duty electric range Model 36ER32 with an all purpose plate top and welded 1/2" (13mm) high raised side lips.

Two top sections (one 12" (305mm) x 24" (610mm) plate & one 24" (610mm) x 24" (610mm) plate).

Full-size oven is controlled by a heavy-duty electromechanical thermostat.

Top has 3 thermostat-controlled heat zones each having a pilot lamp.

Oven interior is 13.5" (343mm) high x 26.25" (667mm) wide x 29" (533mm) deep with removable four-position chrome plated rack guides and one oven rack, front and rear stainless steel grease troughs.

Stainless steel front and sides.

Circuit breakers or fuses provide electric circuit protection.


Available with casters or for dais mount.

Model 36ES32 has storage base in lieu of oven section.









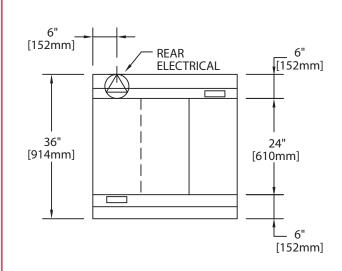

NOTE: For ranges with convection oven(s), (models with suffix 'RC'), air circulation is required for proper operation of fan motors. These models must not be dais mounted or installed with out legs.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.



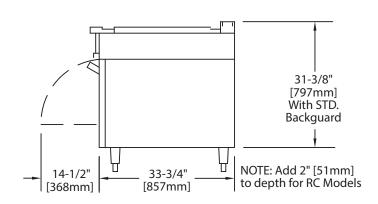

	TOTAL kW	3-PHASE kW PER PHASE ALL VOLTAGES			NOMINAL AMPERES PER LINE											
MODEL					SINGLE PHASE			THREE PHASE								
MODEL								208V		240V			460V			
		X-Y	Y-Z	X-Z	208V	240V	460V	Х	Υ	Z	Х	Υ	Z	Χ	Υ	Z
36ER32	21.5	6.5	5	10	103	91	47	69	48	64	61	43	56	31	22	28
36ES32	15	5	5	5	72	64	33	42	42	42	37	37	37	19	19	19

Shipping Cubic Feet 51, all models except 36ET32 which is 20 Cu Ft.

CLEARANCES							
ENTRY		TO COMBUSTIBLE WALL					
CRATED	UNCRATED	SIDES	REAR*				
41-1/4"	36-1/4"	3"	1/2" (13mm)				
(1048mm)	(921mm)	(76mm)					

Garland reserves the right to make changes to the design or specifications without prior notice.

