



Model E24-36G

Specification:

Heavy duty electric griddles available in five (5) widths; 24" (610mm), 36" (914mm), 48" (1219mm), 60" (1524mm) and 72" (1829mm). High performance, high volume production with even, consistent, controlled temperatures. 3/4" (19mm) thick griddle plate complete with grease trough and splashguard. Optional grooved griddle tops in 12" (305mm) wide sections. All models are designed as freestanding units or bank with other E24 series equipment or with G24 series gas counter. Stainless steel front and black powder coat epoxy sides. 100°F (35°C) to 450°F (235°C) hydraulic thermostats with pilot lights are provided for each 12" (305) width of griddle surface. Even frying temperatures are assured by specially designed pressure clamped tubular heat elements.

Standard Features:

- Stainless steel front
- Black powder coat epoxy sides
- 4" (102mm) Sanitary legs
- Recovery signal light
- 100°F (35°C) to 450°F (235°C) hydraulic thermostat with pilot light per each 12" width of griddle
- One-Year limited parts & labor warranty

Optional Features:

- ☐ Stainless steel body sides
- ☐ Stainless steel back
- ☐ Grooved griddle plate, in 12" (305mm) sections
- ☐ 460 volt

Optional CS24 Series Stands:

- ☐ Floor Stands: Heavy-duty stands of open design with seamless welded square tube legs. Black finish Storage shelf supplied with stands up to 48" (1219mm) wide. Working height of all units on stands 35-1/2" (902mm) Stand widths available in 15" (381 mm), 18" (457mm), 24" (610mm), 30" (762mm), 36" (914mm), 48" (1219 mm), 60" (1524mm) and 72" (1829mm). Example for E36-31G griddle, specify compatible CS24-36 stand.
- ☐ Optional: Stainless steel finish add suffix SS
- ☐ Swivel casters W/front brakes; set of 4



Garland Commercial Industries, Inc.
185 East South Street
Freeland, Pennsylvania 18224
Phone: (570) 636-1000
Fax: (570) 636-3903

Garland Commercial Ranges Ltd
1177 Kamato Road, Mississauga, Ontario
L4W 1X4 CANADA
Phone: 905-624-0260
Fax: 905-624-5669

Enodis UK LTD
Swallowfield Way, Hayes, Middlesex
UB3 1DQ ENGLAND
Telephone: 081-561-0433
Fax: 081-848-0041


GARLAND®

Item #: _____

Model: E24-G Series

Product Name: E24 Series Heavy Duty Griddles

LOADING CHART

Model	Total Kw Load	Nominal Amperes Per Line							
		3 Phase						Single Phase	
		240V			208V			240V	208V
		X	Y	Z	X	Y	Z		
E24-24G	8.0	16.5	16.5	29.0	19.0	19.0	33.0	33.5	33.5
E24-36G	12.0	29.0	29.0	29.0	33.5	33.5	33.5	50.0	58.0
E24-48G	16.0	44.0	29.0	44.0	51.0	33.0	51.0	67.0	77.0
E24-60G	20.0	44.0	44.0	58.0	51.0	51.0	66.5	83.5	96.0
E24-72G	24.0	58.0	58.0	58.0	66.0	66.0	66.0	100.0	116.0

Export voltage available on request – Specify wiring required

kW loadings are reduced on 220 volt systems.


Standard wiring 240 volt (220/240) or 208 volt (197/219) single or three phase – **Specify which is required**
SURFACE CAPACITIES

Model	Meat Patties 3-1/2 Oz (98g) (350°F/177°F)		Fried Eggs (300°F/149°C)		Minute Stakes 4 oz. (112g) (350°F/177°C)		Pancakes 4" (101mm) Dia. (400°F/204°C)	
	Load	Hourly	Load	Hourly	Load	Hourly	Load	Hourly
E24-24G	33	300	27	613	27	267	31	460
E24-36G	50	450	40	920	40	400	46	690
E24-48G	67	600	53	1227	53	533	61	920
E24-60G	83	750	67	1533	67	667	77	1150
E24-72G	100	900	80	1840	80	800	92	1380

Installation Clearances

Side	Rear
1" (25mm)	1" (25mm)


Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

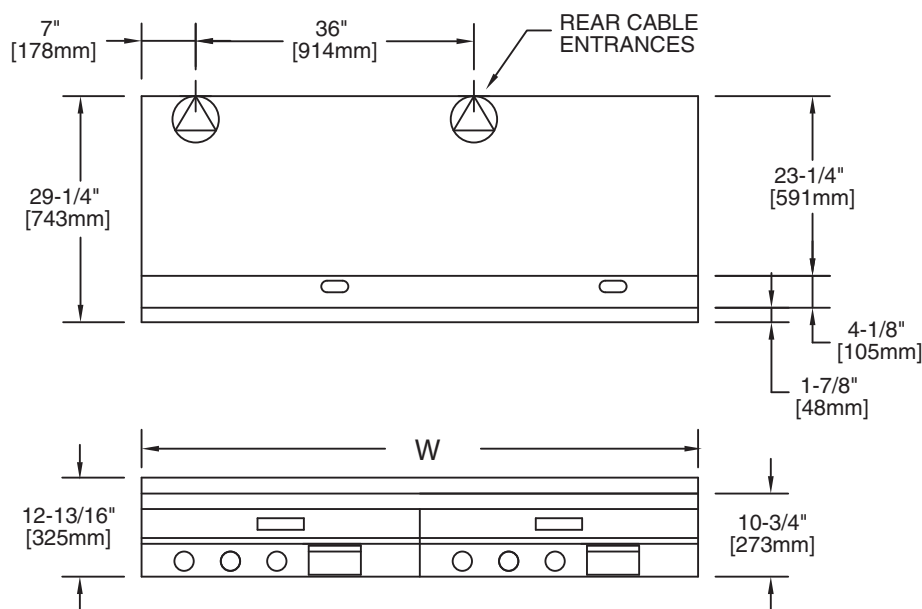

NOTE: Add 4" (102mm) to height if sanitary legs are used.

Model	W
E24-24G	24" (610mm)
E24-36G	36" (914mm)
E24-48G	48" (1219mm)
E24-60G	60" (1524mm)
E24-72G	72" (1829mm)

Note: 48", 60" and 72" Models supplied with two (2) terminal blocks

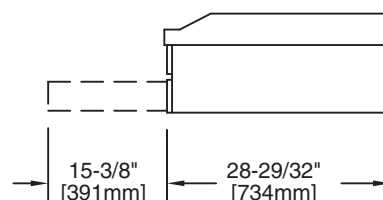

Continuous product improvement is a Garland policy. Specifications and design are subject to change without notice.

Printed in USA

Form #E24-G Series (03/06)