

Master Series Gas Convection Oven With easyTouch™ Control

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- MCO-GS-10M
- MCO-GS-20M
- MCO-GD-10M
- MCO-GD-20M



Model MCO-GS-10M

Standard Features

- EasyTouch® screen design with simple on/off switch and intuitive Press and Go interface
- Master 4.3" Controller with 150°F (66°C) to 500° (260°C) temperature range
- Cook'n'Hold
- Eco-mode
- Two cooking timers
- Pre-programmed recipes
- Direct spark with 100% safety shut-off
- 2-speed fan control (high & low) with .6 HP fan motor
- Total of 60,000 BTU (17.6 kW) loading per oven cavity
- Natural or propane gas
- Stainless steel front, sides, top, and legs
- 60/40 dependent door design with double pane thermal window in both doors and interior lighting
- Full-length, stainless steel positive door closure
- Patented "Safety Door System"
- Porcelain enameled oven interior with coved corners
- 24" cooking cavity height w/6 chrome-plated oven racks on 13-position rack guides
- Double-deck models available, suffix -20M
- Deep-depth models available, prefix MCO-GD

Warranty

- 2-year limited part & 1-year labor warranty (USA & Canada only)
- 5-year limited door warranty, excluding window (USA & Canada only)

Options & Accessories

- 80,000 BTU (23.4kW) burner package (natural gas)
- Stainless steel solid door(s) (specify) – No charge
- Removable stainless steel drip pan
- Deck fasteners
- Extra oven racks
- Swivel casters, (4) w/front brakes
- 4 Low-profile casters, w/front brakes (double ovens only)
- Stainless steel open base with rack guides and shelf
- Direct connect vent
- Back enclosure (stainless steel)
- 3/4" gas flex hose & quick disconnect
- 208 or 240 volt, single-phase motor (please specify)
- Maximum security package available, contact factory for details

Specifications

Garland Master Series full-size standard-depth, prefix MCO-GS or deep-depth, prefix MCO-GD, gas convection oven.

60,000 BTU (17.6 kW)/cavity, .6 HP fan motor with two-speed fan control.

Electronic spark ignition. Natural or propane gas.

EasyTouch™ screen.

Porcelain enameled oven interior with coved corners,

Six (6) oven racks and 13-position rack guides.

All model interiors are 29" (736mm) W by 24" (610mm) H, depth is 24" (610mm) for standard depth and 28" (711mm) for deep depth.

Stainless steel front, sides, top, and legs.


60/40 dependent door design with double pane thermal window in both doors and interior lighting.

Models with suffix -20M are double-deck units.


Specify voltage if other than 115 volt, 60 Hz, 1-phase.

UL, CUL Gas-Fired and NSF Listed.



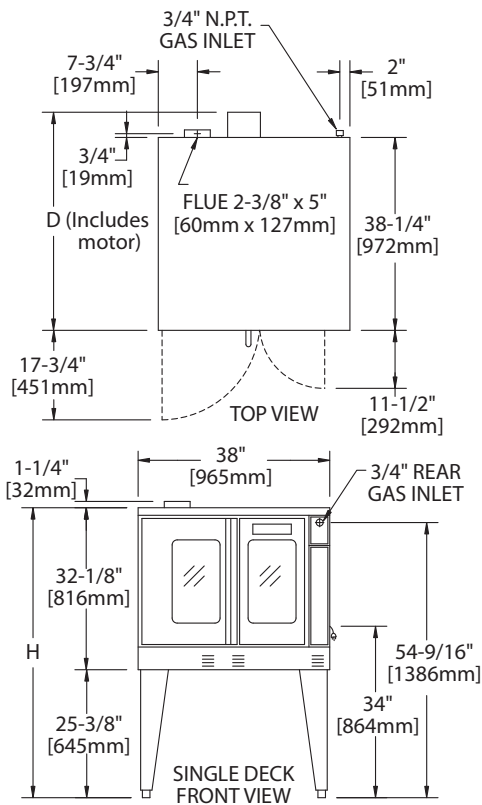

Gas Input Ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft. Please specify gas type when ordering.

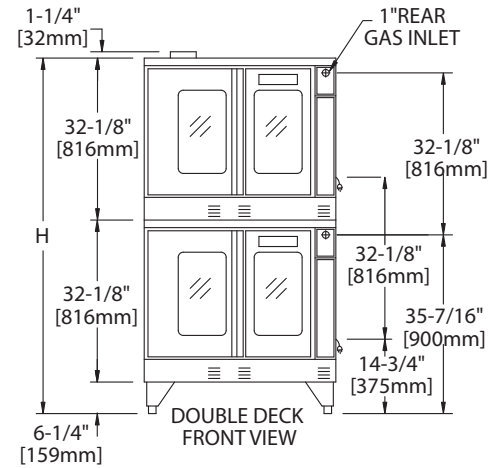

Combustible Wall Clearances:

Sides: 1" (25mm) Back: 3" (76mm)

Crated: 47" (1194mm) Uncrated: 32 1/2" (826mm)

Note: Installations beside units with high heat sources it is recommended to leave 6" (152mm) on the right side of oven. Refer to the installation manual for more details.

Manifold Operating Pressure:

Natural: 4.5" WC (11 mbar). Propane: 10" WC (25 mbar) Max 13.8" WC @ 70°F

Note: Data applies only to North America

PLEASE NOTE:

- Standard electrical specifications include motor requirements (120V units) 115V, .6 HP, 2-speed motor; 1140 and 1725 rpm, 60Hz.
- (240V units) 200-240V, .6 HP, 2-speed motor; 1140 and 1725 rpm, 60 Hz.
- A 6 ft. line cord is provided for each 120V deck with a (NEMA #5-15P) plug.

SINGLE-DECK MODELS	INT. DIMENSIONS: In mm			EXT. DIMENSIONS: In mm			SHIP WT.	SHIP DIM.
	W	H	D	W	H *	D	lbs/kg	cubic Ft.
Standard Depth	29 (736)	24 (610)	24 (610)	38 (965)	57-1/2 (1461)	41-1/4(1048)	515/230	64
Deep Depth	29 (736)	24 (610)	28 (711)	38 (965)	57-1/2 (1461)	44-1/2(1130)	545/245	64

DOUBLE-DECK MODELS	INT. DIMENSIONS: In mm			EXT. DIMENSIONS In mm			SHIP WT.	SHIP DIM.
	W	H	D	W	H *	D	2@lbs/kg	Cubic Ft.
Standard Depth	29 (736)	24 (610)	24 (610)	38 (965)	70-1/2 (1791)	41-1/4(1048)	1030/465	128
Deep Depth	29 (736)	24 (610)	28 (711)	38 (965)	70-1/2 (1791)	44-1/2(1130)	1090/490	128

*Height with or without standard casters. Height with low profile casters (double deck) is 68-1/2" (1740mm).

MODELS	INPUT RATINGS, NAT & PRO			ELECTRICAL SPECIFICATIONS	
	BTU/hr	kW Eqiv.	Gas inlet	120V/1Ph.	240V/1Ph.
Single Deck	60,000	17.6	(1)@3/4" NPT	(1)@9.8A	(1)@5.2A
Double Deck	120,000	35.2	(1)@1" NPT	(2)@9.8A	(2)@5.2A

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
7819B
08/24

