


Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Drink Rails

DI-DR24, DI-DR30, DI-DR36

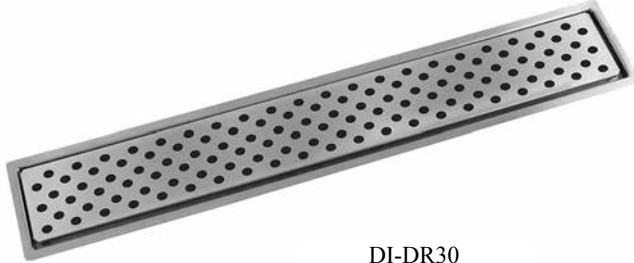

DI-DR30  
Top View



DI-DR30  
Front View



**Intertek**

4004503

Conforms to ANSI/NSF STD 2

### Standard Features

- All stainless steel construction
- Available in 24", 30", or 36" lengths
- Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
- Drain pan includes 1/2" flange
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows
- Install by making cut-out in work surface (see Cut-Out Dimensions under Specifications). Make initial drain connection, especially if access to drain is limited once the unit is in place. Apply silicone sealant to underside of flange. Set in place and finish plumbing the drain line.

### Specifications

#### Drains

- 1/2" welded tailpiece

#### Cut-out Dimensions


- Model DI-DR24 - 4-1/4" by 23-1/4"
- Model DI-DR30 - 4-1/4" by 29-1/4"
- Model DI-DR36 - 4-1/4" by 35-1/4"

#### Materials

- 20 gauge stainless steel parts include: perforated insert
- 18 gauge stainless steel parts include: drain pan


To view cleaning and care instructions, please visit:  
[https://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)

### Dimensional Information




PLAN VIEW

X = Left to right dimension is 24", 30", or 36"



FRONT VIEW



SIDE ELEVATION

**Glastender, Inc.** • 5400 N Michigan Rd • Saginaw, MI • 48604-9780  
 989.752.4275 • 800.748.0423 • Fax 989.752.4444  
[www.glastender.com](http://www.glastender.com)

Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.