




## Corner Filler Model Numbers and Dimensions




# **Specifications**

#### Materials

- 20 gauge stainless steel parts include: perforated insert
- 18 gauge stainless steel parts include: drain pan

## Dimensional Information

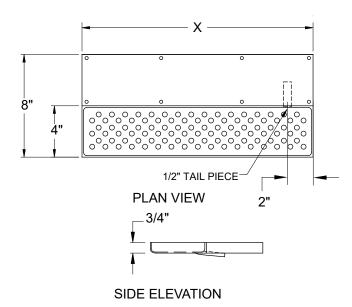

X = Left to right dimension from 12" to 48", in 6" increments


Project:	AIA#
Item #: Qty:	SIS#
Model #:	_ [

# Drink Rails

DR-12L, DR-12R, DR-18L, DR-18R, DR-24L, DR-24R, DR-30L, DR-30R, DR-36L, DR-36R, DR-42L, DR-42R, DR-48L, DR-48R


## Standard Features

- All stainless steel construction
- One-piece, seamless mounting deck and pan with removable perforated inserts
- 30" and 36" models have one gusset and 42" and 48" models have two gussets for added strength
- Drain consists of 1/2" tailpiece that exits from the back of the unit
- 45° and 90° inside and outside corner filler sections available
- Installation kit includes: 10' of clear vinyl drain tube, one 4" Ty-wrap, three #10 x 1/2 stainless steel sheet metal screws, three cable clamps and one 1/2" x 1/2" x 1/2" plastic tee, 17 #10 x 1/2 black sheet metal screws



To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011 ss clean care.pdf

#### Installation Detail



Apply silicone sealant to the rear mounting surface of the drink rail. Install unit by securing to underside of bar top with wood screws provided. If installing to material other than wood, use appropriate screws to secure. Plumb drain once installed.

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes: