

Standard Features

- Self-contained refrigeration
- All 300 series stainless steel interior construction with radius corners for easy cleaning
- Perfect exterior dimensions: 24" front to back and 24", 36", or 48" left to right
- CFC free foamed-in-place insulation
- Two Defrost Cycles: *automatic* occurs every six hours without affecting normal operation, *manual* - user selected for complete six-hour defrost with automatic restart

Specifications

Electrical

NSE

- 115V, 1 phase, 60 Hz, 8.2 full load amps
- Dedicated 15 amp circuit is recommended
- Includes a 6-foot grounded cord and plug which ٠ exits the left rear of the refrigeration compartment

Refrigeration

- 1/3 HP, 404A refrigerant
- Operating range: -15°F to 0°F
- Fin & tube evaporator with forced air circulation Plumbing
 - · Interior floor drain and condensate drain to auto-
- matic evaporator. No drain connection required Capacity
 - 24" Model: 105 10-oz mug total capacity; 41 bottom shelf, 41 middle shelf, 23 top shelf
 - 36" Model: 175 10-oz mug total capacity; 64 bottom shelf, 64 middle shelf, 47 top shelf
 - 48" Model: 252 10-oz mug total capacity; 90 bottom shelf, 90 middle shelf, 72 top shelf

- 3-3/4" casters or 6" legs are available
- Three exterior options: black vinyl-clad steel, stainless steel front & sides, or all stainless steel
- Three shelving options: standard (bottom), one additional layer, or two additional layers
- Six-foot grounded cord & plug included (exits left rear)
- · Automatic condensate evaporator no drain connection required
- One-piece integral top and mullion design

Legs


- 1-5/8" diameter · Stainless steel bullet feet
- *Materials*
 - 20 gauge 300 series stainless steel parts include: top, door, interior floor, back*, front*, and sides* (*if all stainless finish is specified)
 - 20 gauge black vinyl-clad steel parts include: sides, front, and back (if black vinyl-clad steel exterior is specified)
 - 22 gauge 300 series stainless steel parts include: interior walls
 - 16 gauge stainless steel parts include: legs* (* if specified)
 - 16 gauge galvanized steel parts include: base


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

Mug Frosters

Dimensional Information

Мо	del	Α	В	No. of Doors
MF	24	24″	20″	1
MF	36	36″	32″	1
MF	48	48″	44″	2

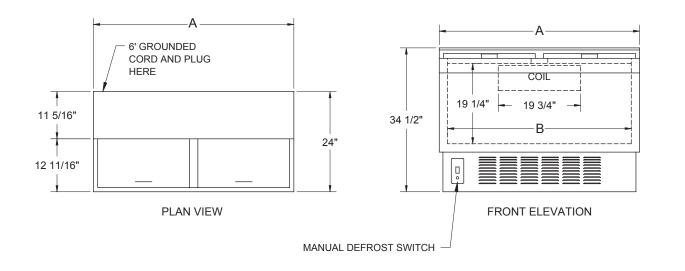

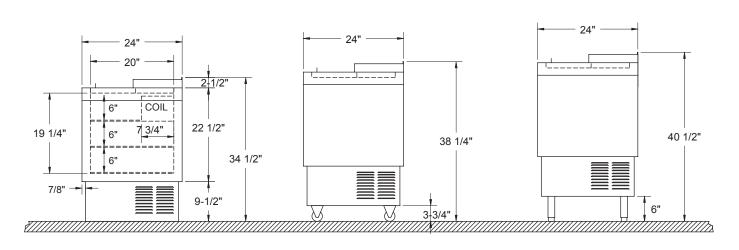

Standard Base Showing Optional Shelving **Optional Casters**

Optional 6" Legs

TYPICAL END VIEWS

