

Optional Rinser Faucet

Installation Notes

- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
- Must install backflow prevention device conforming to ANSI/ASSE 1022 or ANSI/ASSE 1024 to meet plumbing code (not included).
- Install in-line water regulator (included).
- A separate shut-off valve is recommended (not included).
- Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.



Intertek

4004503 Conforms to NSF/ANSI STD 372




Optional Rinser Faucet Extension

SIS#

AIA#

Roman Towers

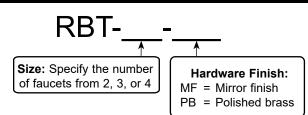

- 1/4" stainless steel shanks with 3/16" restriction lines
- Available in mirror finish or polished brass* (*NOTE: Polished brass towers provided with mirror finish drain pan and polished brass perforated insert)
- Surface-mount, stainless steel drain pan with
- Mirror or polished brass finish
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Numerous ceramic color finishes; consult factory for details
- Rinser faucet extension to the left or right of the drain pan; specify RFE option

Specifications

Materials

- Miscellaneous ceramic, stainless steel, and brass parts in dispensing tower
- 20 gauge stainless steel parts include drain pan and perforated inserts

Shank Sizes

• 1/4" I.D. with 3/16" fitting

Drains


1/2" tailpiece on drain pan

Rinser Faucet (optional)

- · Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

Drawings

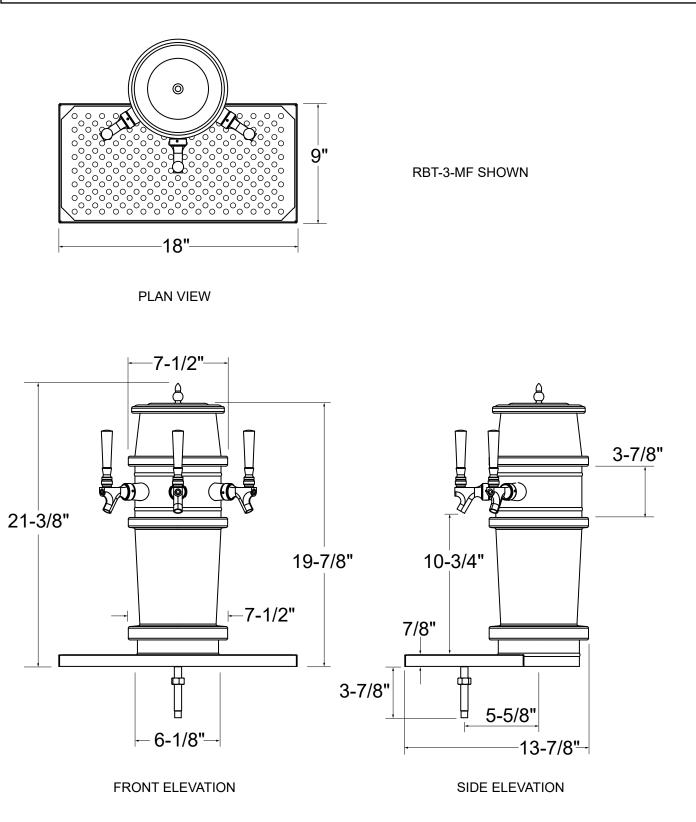

 5400 N Michigan Rd • Saginaw, Ml • 48604-9780

 989.752.4275 • 800.748.0423 • Fax 989.752.4444

 www.glastender.com