

www.glastender.com



## **Optional Rinser Faucet**

#### **Installation Notes**

- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
- Must install backflow prevention device conforming to ANSI/ASSE 1022 or ANSI/ASSE 1024 to meet plumbing code (not included).
- · Install in-line water regulator (included).
- A separate shut-off valve is recommended (not included).
- Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.

03012383
Rinser Faucet Assembly

Intertek

4004503
Conforms to NSF/ANSI STD 372



Optional Rinser Faucet Extension

Project:		AIA#
Item #:	Qty:	SIS#
Model #:		Olon

# Rembrandt Towers

RCT	<u> </u>
Size: Specify the number of faucets from 2 or 3	Hardware Finish: MF = Mirror finish PB = Polished brass

#### Standard Features

- 1/4" stainless steel shanks with 3/16" restriction lines
- · All stainless steel mirror finish faucets
- Available in mirror finish or polished brass\* (\*NOTE: Polished brass towers provided with mirror finish drain pan and polished brass perforated insert)
- Surface-mount, stainless steel drain pan with removable, perforated insert

### Configurable Options

- · 2 or 3 faucets
- · Mirror or polished brass finish
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Numerous ceramic color finishes; consult factory for details
- Rinser faucet extension to the left or right of the drain pan; specify RFE option

#### Specifications

#### Materials

- Miscellaneous ceramic, stainless steel, and brass parts in dispensing tower
- 20 gauge stainless steel parts include drain pan and perforated inserts

#### Shank Sizes

• 1/4" I.D. with 3/16" fitting

#### **Drains**

1/2" tailpiece on drain pan

#### Rinser Faucet (optional)


- · Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute

**Glastender, Inc.** • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com


Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

## **Drawings**



**RCT-3-MF SHOWN** 

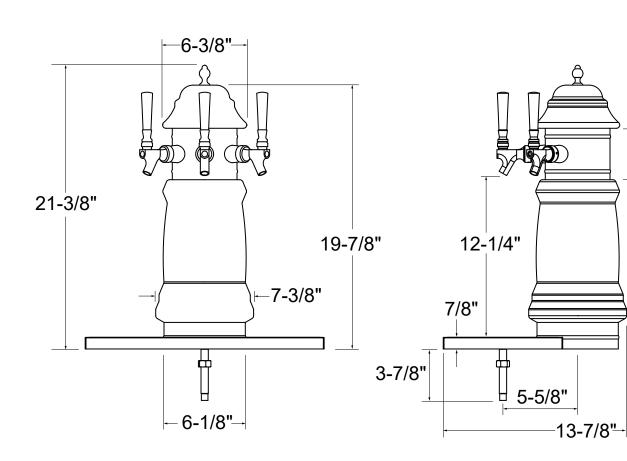



FRONT ELEVATION

SIDE ELEVATION

3-7/8"