



# HEAVY DUTY COUNTERTOP GAS GRIDDLES



Picture is representative only. Not actual product.

Job \_\_\_\_\_ Item # \_\_\_\_\_

## GAS COUNTER TOP GRIDDLES

### Manual

- HDMG-2424
- HDMG-2436
- HDMG-2448
- HDMG-2460
- HDMG-2472

### Thermostatic

- HDTG-2424
- HDTG-2436
- HDTG-2448
- HDTG-2460
- HDTG-2472

## STANDARD FEATURES

- 1" thick griddle plate
- 24" deep grilling surface
- Heavy gauge, hand-welded, heat-resistant steel combustion chamber
- 33,000 BTUH burners every 12"
- Up to 198,000 total BTUH in natural or LP gas
- Individually operated burner valves with manual, thermostatic/snap-action controls
- Stainless and aluminized steel exterior
- Stainless steel landing ledge
- Stainless steel, welded splash guards
- Low profile, counter top design - only 13 1/8" to grilling surface
- Front grease trough
- Stainless steel, slide-out grease pan
- Heavy-duty 4" NSF approved adjustable chrome legs with bullet feet
- 3/4" (19mm) NPT rear gas connection
- Limited one year parts & labor warranty

## SPECIFICATIONS

Gas counter top griddles with a low profile design that are only 13 1/8" tall to grilling surface making them ideal for use on refrigerated cabinets or counter tops.

HD Series Griddles are designed to mix and match with the HD or XX Series Char Broilers and HD or XOB Series counter top ranges.

The griddle plate is 1" thick (25.4mm) and 24" deep (610mm), polished, cold-rolled steel. Six widths are available from 24" (610mm) to 72" (1829mm) in one foot increments.

The HD Series features high-performance, energy-efficient, 33,000 BTUH burners located every 12" with individual, operator-controlled valves and are available in two control types: manual or thermostatic.

The interior combustion chamber is heavy-duty heat resistant 11- and 16-gauge steel, and is hand-welded for strength and durability.

Standard features include stainless and aluminized steel exterior, spatula-width front grease trough, stainless steel landing ledge and large capacity, slide-out grease pan. Additional features include individual 3/4" NPT rear gas connection in natural or LP gas, pressure regulator and 4" (102mm) NSF approved legs with adjustable bullet feet. Stainless steel splash guards are continuously welded to the griddle plates.

One year limited parts and labor warranty.

## OPTIONS & ACCESSORIES


- Stainless steel front-mounted work deck with or without sauce pan cut-outs
- Condiment rail
- Gas connector hoses
- Equipment stands with or without casters
- One year limited warranty

## CERTIFICATIONS



BAKERS PRIDE OVEN COMPANY, INC.  
30 Pine Street, New Rochelle, NY 10801  
914/576-0200 • 1-800-431-2745 • fax 914/576-0605  
www.bakerspride.com

*Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification*

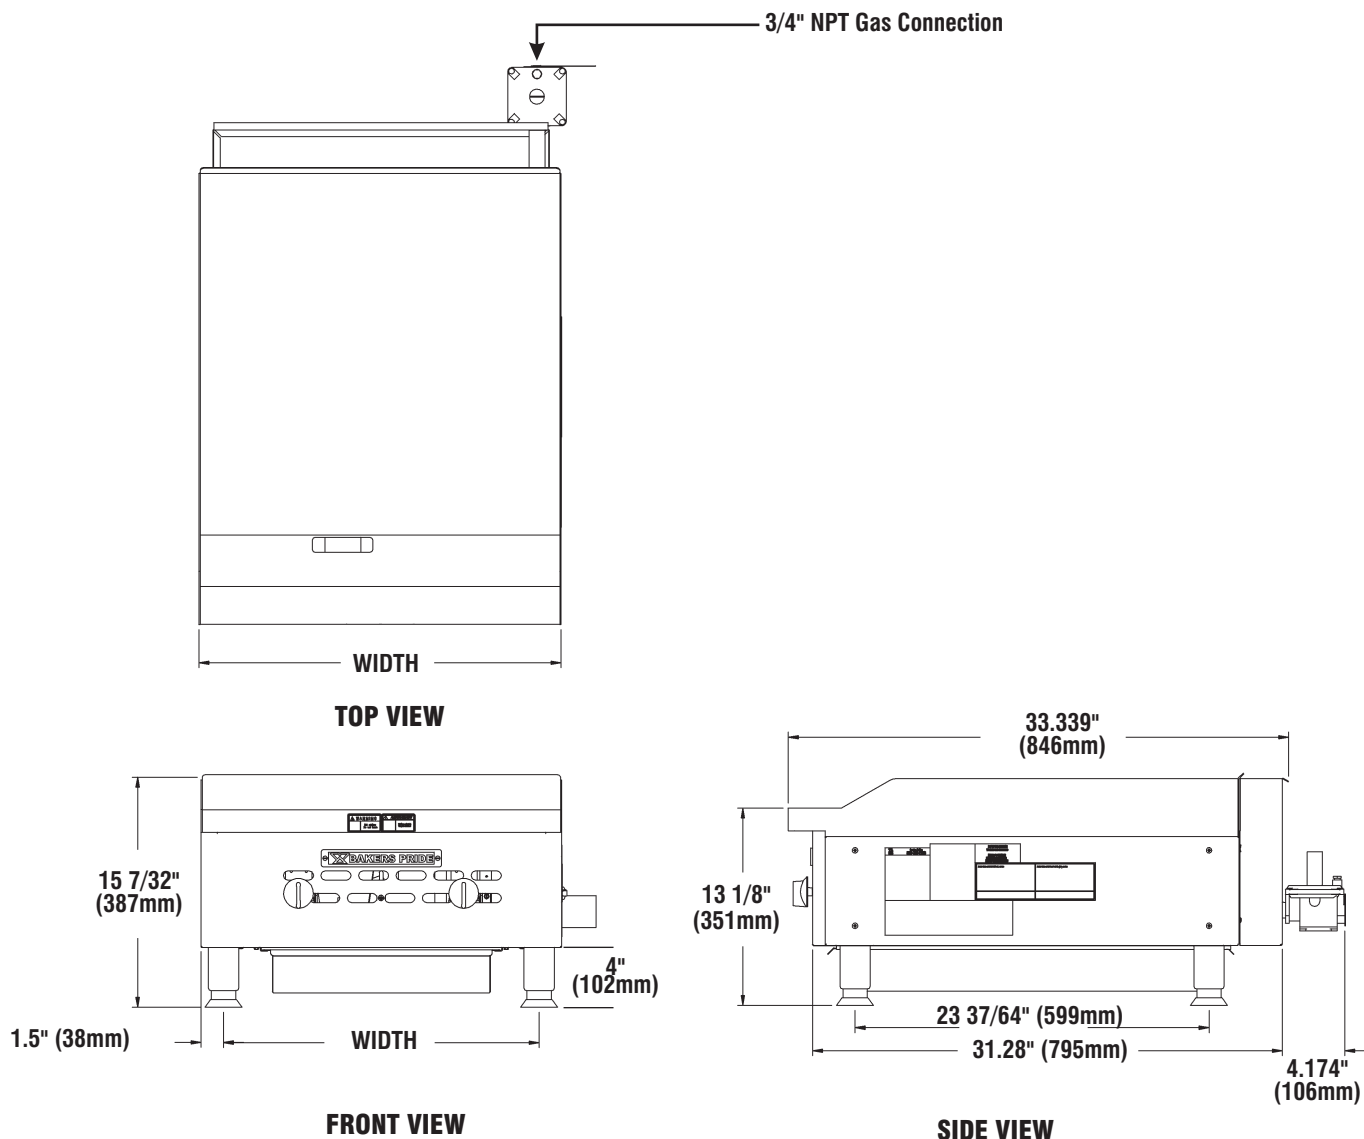

ALL DIMENSIONS NOMINAL

Model	Shipping Weight		Carton Dimensions							
	Lbs.	Kilos	Width		Depth		Height		Cubic	
			Inches	mm	Inches	mm	Inches	mm	Feet	Meter
HDG-2424	308	140	29 3/4	756	42 3/4	1086	18 3/4	476	16.0	.46
HDG-2436	460	209	41 3/4	1060	42 3/4	1086	18 3/4	476	24.6	.71
HDG-2448	540	245	53 3/4	1365	42 3/4	1086	18 3/4	476	30.2	.88
HDG-2460	655	297	65 3/4	1670	42 3/4	1086	18 3/4	476	32.6	.95
HDG-2472	770	349	77 3/4	1975	42 3/4	1086	18 3/4	476	34.9	1.01

GAS SUPPLY			
Model	BTUH	KW	CONNECTION
HDG-24	80,000	23.4	3/4"
HDG-36	120,000	35.1	3/4"
HDG-48	160,000	46.8	3/4"
HDG-60	200,000	58.6	3/4"
HDG-72	240,000	70.3	3/4"

Model	Grilling Area		# of Burners	Overall Dimensions*					
	in.	mm		Width		Depth		Height	
				Inches	mm	Inches	mm	Inches	mm
HDG-2424	24x23 7/8	610x606	2	24	610	33 5/16	846	15 7/32	387
HDG-2436	24x35 7/8	610x911	3	36	914	33 5/16	846	15 7/32	387
HDG-2448	24x47 7/8	610x1216	4	48	1219	33 5/16	846	15 7/32	387
HDG-2460	24x59 7/8	610x1521	5	60	1524	33 5/16	846	15 7/32	387
HDG-2472	24x71 7/8	610x1826	6	72	1829	33 5/16	846	15 7/32	387

\*Height includes 4" (102 mm) standard legs to grilling surface

MINIMUM CLEARANCES		
	Non-combustible construction only	
	Inches	mm
Right	0	0
Left	0	0
Rear	0	0

• From non-combustible construction  
• Install only with non-combustible material above griddle surface



BAKERS PRIDE OVEN COMPANY, INC.  
30 Pine Street, New Rochelle, NY 10801  
914/576-0200 • 1-800-431-2745 • fax 914/576-0605  
www.bakerspride.com

Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification

HEAVY-DUTY-HDG — TSW:01/09