

ELECTRIC HOT FOOD TABLES WITH ENCLOSED BASE AND SLIDING DOORS





ltem #:	Qty #:
Model #: _	
Project #:	

For Use with Optional Spillage Pans

FEATURES:

Stainless steel body, top and legs Stainless steel undershelf Fiberglass insulation between each compartment Units intended for dry use. For hot water bath, must use optional Spillage Pans # SP-A (Aluminum) or # SP-S (Stainless)

1" thick poly cutting board (8" wide)

MATERIAL:

TOP: 20 gauge #302 stainless steel with die stamped pan openings. (11.875" x 20.062") BODY: 22 gauge #430 stainless steel LEGS: 18 gauge stainless steel with fully adjustable non-marking tip plastic bullet foot UNDERSHELF: 22 gauge #430 stainless steel LINERS: 8" deep, 22 Gauge galvanized (standard) or #302 stainless steel upgrade (Model # SU-32)

CUTTING BOARD: White thermoplastic CUTTING BOARD BRACKETS: 16 gauge #302

stainless steel

ELECTRICAL:

120V units yield 500 Watts 208V/240V dual voltage units yield 750 Watts at 208V and 1000 Watts at 240V 6' electrical cord with plug Infinite control knobs Indicator lights



GALVANIZED LINERS	Length	# of Wells	Volts	NEMA Plug	Power Consumption	Weight	Cubic Feet
HF-2E-120-DR	A = 31-13/16"	2	120	5-20P	15/500	92 lbs.	28
HF-3E-120-DR	B = 47-1/8"	3	120	5-20P	15/500	210 lbs.	41
HF-4E-120-DR	C = 62-7/16"	4	120	L5-30P	30/500	250 lbs.	55
HF-2E-240-DR	A = 31-13/16"	2	208/240	6-20P	15/750 • 20/1000	92 lbs.	28
HF-3E-240-DR	B = 47-1/8"	3	208/240	6-20P	15/750 • 20/1000	210 lbs.	41
HF-4E-240-DR	C = 62-7/16"	4	208/240	L6-30P	20/750 • 30/1000	250 lbs.	55
HF-5E-240-DR	D = 77-3/4"	5	208/240	L6-30P	20/750 • 30/1000	290 lbs.	67

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures



NEMA PLUG 5-20P









Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.


For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933

TOL ± .125" ALL DIMENSIONS ARE TYPICAL

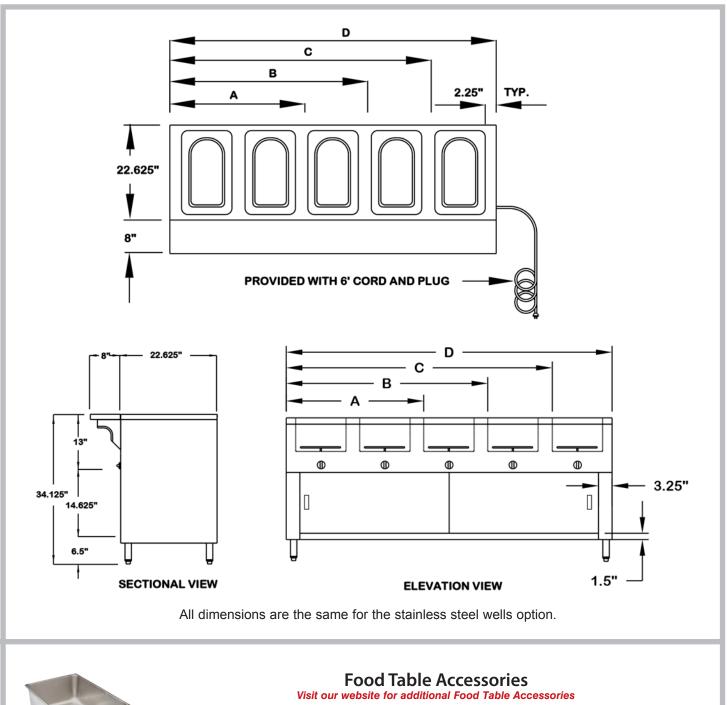



SP-A - Spillage Pan



SU-25 - Casters

- **SU-32** Upgrade to a Stainless Steel Lining (Excludes Sealed Hot Well Units)
- SU-25 Portable Kit (Includes 4 -5" Swivel Casters, 2 w/ Brakes & Universal Mount Push Handle)
- SP-A Aluminum Spillage Pan
- SP-S Stainless Steel Spillage Pan
- SU-72 Upgrade to 240 volt units to 3-Phase Wiring

-M Manifold Drains (Per Well)



Manifold Drain Shown



ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.