

# VR1A-FS

## One Section Full Solid Door Refrigerator

VALIANCE®

by  HOSHIZAKI

VR1A-FS  
05/12/25  
Item #13735

### W x D x H

26.88" x 32.00" x 81.70"  
including 4" casters)



### Dimensions / Capacity

### One Section VR1A-FS

Interior Storage Capacity (CF) (AHAM)	19.07 ft³
Overall Width x Depth	26.88" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	26.54" x 52.31"
Depth with Door Open at 90°	57.87"
Adjustable Shelves	3
Shelf Dimensions (W x D)	21.56" x 24.88"
Crated Shipping Weight	286 lbs
Crated Length x Depth x Height	33.50" x 28.75" x 83.88"

### Electrical / Refrigeration

### One Section VR1A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	36° to 42°F
Amperage	2.1
Energy Consumption (kWh/day) @ASHRAE	0.96
Approx. Nominal Compres. BTU/HR (HP)	1461
Refrigerant / Charge Amount (oz.)	R290 / (2.65oz)

### Warranty

3 Year - labor on entire machine  
4 Year - parts on entire machine  
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty: 44

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

# VR1A-FS


One Section Full Solid Door Refrigerator

VALIANCE®


by  HOSHIZAKI

VR1A-FS  
05/12/25  
Item #13735

FRONT VIEW

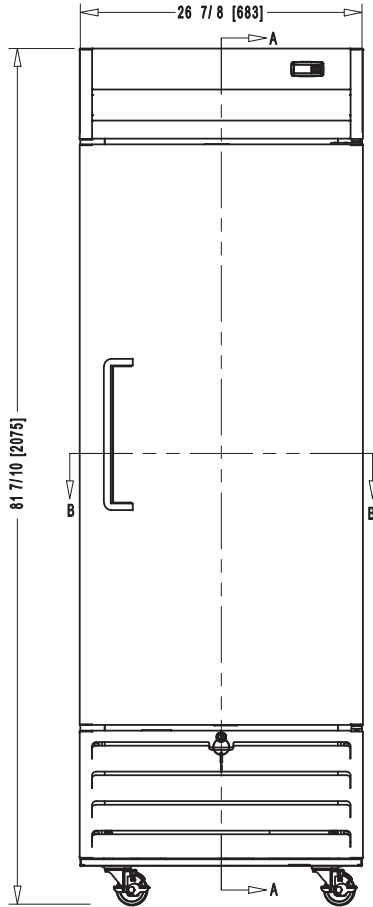

SIDE VIEW

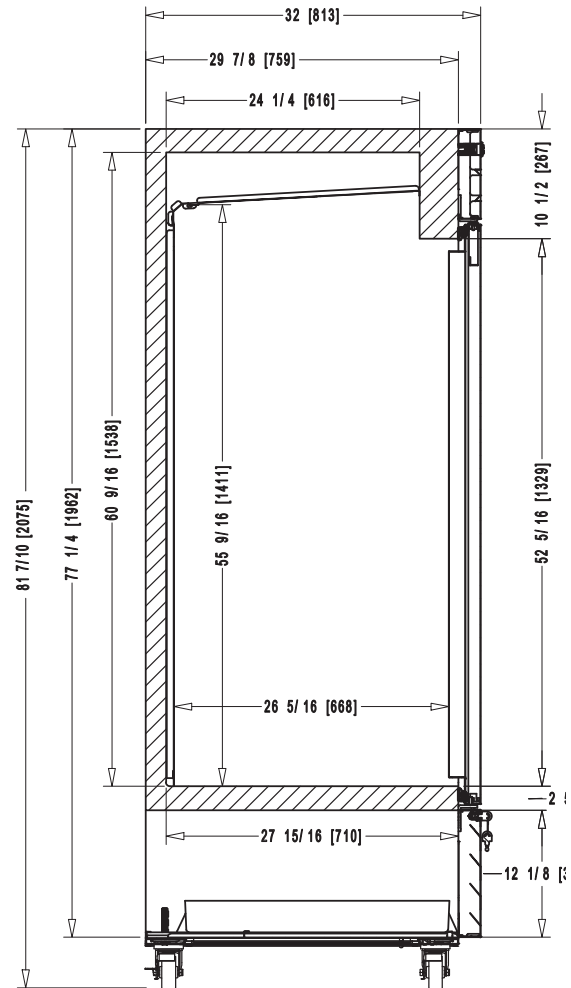

PLAN VIEW

