



IS 15 IDRA IS 25 IDRA IS 35 IDRA

Sausage stuffers, hydraulic



IS 15 IDRA



IS 25 IDRA



IS 35 IDRA

- Complete stainless steel construction to withstand heavy-duty application
- Easily removable lid, cylinder and piston for thorough cleaning and sanitation to ensure the highest levels of hygiene and safety
- IP 67 waterproof & dustproof protection switch, flow dial regulator
- Side-mounted foot switch for convenience of operation
- Automatic piston decompression and shut-off
- Dial Adjustment
- Hydraulic oil AW 46 tank with level gauge

Features

Technical

- The machine is completely made of stainless steel for durable long life.
- Silicone gaskets act inside the cylinder for better seal and longer life of the gasket.
- Side mounted foot switch for more comfortable operation.

Safety

- Overload and no volt release protection

Sanitary

- The machine can be completely disassembled for an easy and accurate sanitation.

Specifications

Motor:	0.7 Hp (520 W), fan cooled.
Electrical IS 15:	110-120V, 60Hz, 8A 220-240V AC, 60Hz, 1-Phase, 4.2A +/- 10%
Electrical IS 25:	110-120V, 60Hz, 8A 220-240V AC, 60Hz, 1-Phase, 2.8A
Electrical IS 35:	110-120V, 60Hz, 8A 220-240V AC, 60Hz, 3-Phase, 2.8A
Plug and Cord IS 15:	Attached, flexible, 3 wire SJT 14 AWG, 6'4" long cord, NEMA 6-15 P plug.
Plug and Cord IS 25:	Attached, flexible, 4 wire (3PH+1G) SJT 14 AWG, 6'4" long cord. 1-Phase hardwired, NEMA 6-15 P
Plug and Cord IS 35:	Attached, flexible, 4 wire (3PH+1G) SJT 14 AWG, 6'4" long cord. 3-Phase hardwired, NEMA 15-20 P
Controls:	ON/OFF stainless steel keypad, IP 67 waterproof protection. No voltage release Use 10 min. ON / 15 min. OFF



Certified to UL Standard 763
and NSF Standard 08
Certified to CSA Standard C22.2
(not for IS 25 Idra 220-240V model)



3-funnel set, standard
Ø 1" - Ø 25/64" - Ø 45/64"

Easy and fast breakdown for cleaning



Easy access for maintenance
and oil level checking




Piston gasket



Side mounted foot switch



4-funnel set, in stainless steel
1 1/2" - 5/8" - 7/8" - 1 3/8" optional

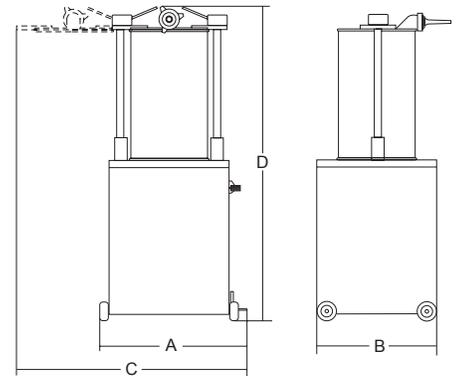

	Power	Power source +/- 10%	Cylinder capacity	Cylinder length	Cylinder diameter	Piston stroke	Min. forward speed	Max. forward speed	Backward speed	Funnel diameter	A	B	C	D	Net weight	Shipping	Gross weight
	Watt/HP		qt	inch.	Ø inch.	inch.				Ø inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
IS 15 Idra	520/0,7	110-120V, 60Hz, 8A 220-240V, 60Hz, 4,2A	15,9	19 1/2"	7 7/8"	16 15/16"	2' 11"	59"	35"	1/2" - 5/8" - 7/8" - 3 1/8"	19 5/16"	14 5/8"	27 9/16"	47 1/4"	117	36" x 36" x 60"	185
IS 25 Idra	520/0,7	110-120V, 60Hz, 8A 220-240V, 60Hz, 2,8A	26,4	18 1/8"	10 1/4"	14 15/16"	2' 02"	51"	32"	1/2" - 5/8" - 7/8" - 3 1/8"	22 1/4"	17 11/16"	37 3/8"	45 11/16"	200	48" x 40" x 60"	270
IS 35 Idra	520/0,7	110-120V, 60Hz, 8A 220-240V, 60Hz, 2,8A, 3-ph	37	18 1/8"	12 5/8"	14 15/16"	2' 02"	51"	32"	1/2" - 5/8" - 7/8" - 3 1/8"	25 3/16"	18 7/8"	39 3/8"	45 11/16"	222	48" x 40" x 60"	325