



GAS

ELEMENTS SERIES CONVECTION OVEN

IMPERIAL



ECV-1

FLOW SYSTEM

- This system assures even cooking throughout the entire oven.
- Standard oven depth.
- Cooked or baked products have less shrinkage, more moisture and taste better.
- Creates an air flow pattern that simultaneously heats the inner and outer surfaces of the oven cavity.
- Recirculates hot air to maximize efficiency for energy savings.
- Fast temperature recovery.
- 1-speed 1/2 hp fan motor for high production cooking and delicate baking.
- Standard oven is rated 10 KW.
- Porcelainized oven interior for easy cleaning and provides better browning.
- 10 rack positions for maximum versatility.
- 3 oven racks included.
- Independent doors
- 50/50 doors swing open to 130°

MANUAL CONTROLS

- Temperature controls provide maximum versatility for general baking and roasting.
- 1-speed fan switch controls bake or roast

THERMOSTATIC OVEN CONTROL

- Snap acting temperature control: 150°F to 500°F (66° C to 260° C).
- On/Off toggle switch

EXTERIOR

- Stainless steel solid doors
- Aluminized side panel
- Welded and finished seams
- Steel legs
- Easy to clean and maintain

IMPERIAL


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



GAS

ELEMENTS SERIES CONVECTION OVEN

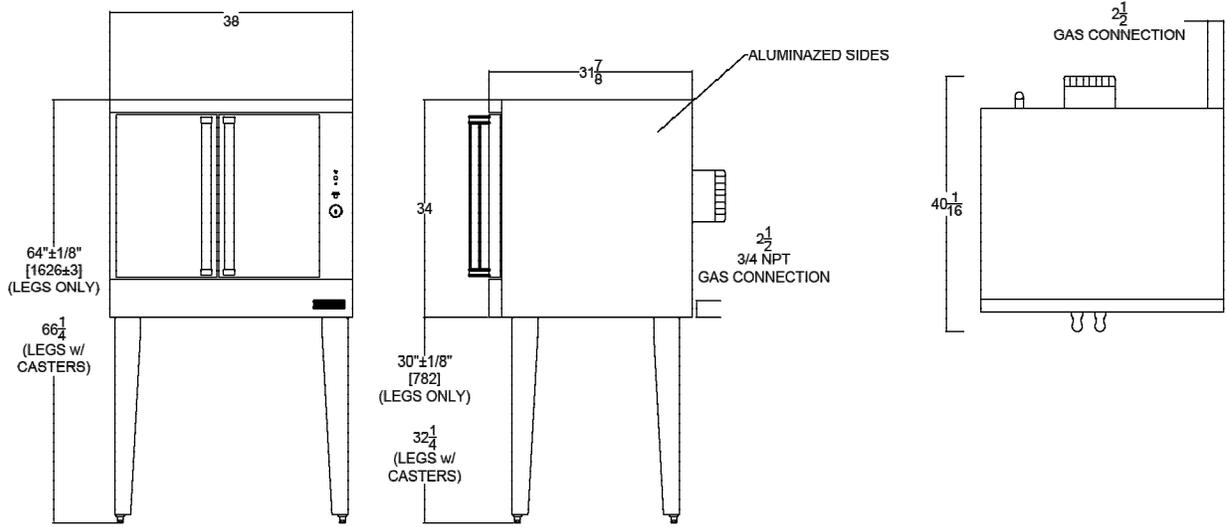

GAS CONVECTION OVENS

MODEL	DESCRIPTION	OPEN BURNERS	DIMENSIONS	CRATED DIMENSIONS	GAS OUTPUT BTU	GAS OUTPUT KW	SHIP WEIGHT KG	SHIP WEIGHT LBS
ECV-1	SINGLE DECK, STANDARD DEPTH	35000	38" W X 40" D X 34" H (965 X 1016 X 864 MM)	39 1/2" W x 47" D X 40" H (1003 X 1194 X 1016 MM)	35000	10 KW	240	528

UTILITY REQUIREMENTS GAS MODELS

MODEL	VOLTAGE	PHASE	HERTZ	AMPS
ECV-1	120	1	60/50	9

CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters; or 2 1/4" (57 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible side and rear walls. Provide 6" (152mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

One speed motor - 1/2 HP, 1725/1140 RPM



MADE IN USA



1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2026 Imperial Commercial Cooking Equipment. Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates.