



# **MODELS**

KGV-MD-(2, 3, 4, 5, 6)-R

# HIGH VOLUME GRAB-N-GO CASE FOR REMOTE CONDENSING UNIT

CASE HOLDS 33°F TO 40°F • FORCED AIR REFRIGERATION • FRONT LOADING
LED LIGHTING IN CANOPY AND UNDER SHELVES
CASES CAN BE MULTIPLEXED











REMOTE	Model	Number of Doors	O.A. Length (inches)	Volume FT³	Total Amps	BTUS	Weight lbs		Crate Size (inches)		
							No Crate	With Crate	L"	W"	Н″
	KGV-MD-2-R	2 x 23-1/2	51.5	37.63	1.43	3345	555	763	54	37	85
	KGV-MD-3-R	3 x 23-1/2	75.4	56.37	2.19	4430	773	1040	78	36	85
	KGV-MD-4-R	4 x 23-1/2	99.4	75.26	2.86	6811	1110	1526	104	36	85
	KGV-MD-5-R	5 x 23-1/2	123.2	94	3.62	7795	1328	1803	126	36	85
	KGV-MD-6-R	6 x 23-1/2	147	112.73	4.38	9397	1546	3052	150	36	85


<sup>\*</sup> Note for other lengths please contact MVP

#### **STANDARD FEATURES**

Silver colored PVC coated steel front panel CFC free injected foam insulation PVC coated steel gray interior Black steel kick plate Retractable Night Curtain Foamed polystyrene black end panels Height adjustable shelves can be tilted Product stops on all shelves Temperature and defrost regulated by a digital controller Levelling feet

## **OPTIONAL FEATURES**

Other colors available Stainless steel exterior and / or interior Additional shelves Price tag molding **Product dividers** Joining Kit **Partition** 

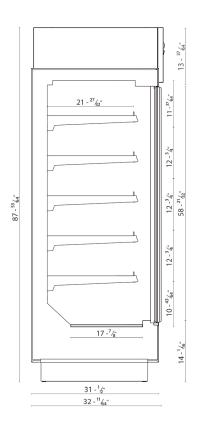


### WARRANTY

One year parts and labor(case only)

#### NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-7/8" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Floor drain must be provided with an expansion value and a liquid solenoid for pump down cycle. Cases must be hard wired - no plugs.



Tel: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / toll free: 877.453.8832

