



## MODELS

KGV-MR-(2, 3, 4, 5, 6)-S

**HIGH VOLUME  
GRAB-N-GO CASE**

CASE HOLDS 33°F TO 40°F • FORCED AIR REFRIGERATION • SELF-CONTAINED  
FRONT & REAR LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES  
CASES CAN BE MULTIPLEXED



AUTODESK<sup>®</sup>  
REVIT<sup>®</sup>

SELF CONTAINED	Model	Number of doors	O.A. Length (inches)	Volume FT <sup>3</sup>	Electrical 115 Volts				Weight lbs		Crate Size (inches)			
					Front	Compressor		LIGHTS Fans HTRS	Total Amps	No Crate	With Crate	L"	W"	H"
						H.P	F.L.A							
	KGV-MR-2-S	2 x 23-1/2	51.5	37.63	5/8	8.9	3.51	12.41	704	864	54	37	95	
	KGV-MR-3-S	3 x 23-1/2	75.4	56.37	5/8	8.9	4.35	13.25	964	1204	78	37	95	
	KGV-MR-4-S	4 x 23-1/2	99.4	75.26	2 x 5/8	2 x 8.9	3.5 + 3.5	12.4 + 12.4	1408	1724	104	36	95	
	KGV-MR-5-S	5 x 23-1/2	123.2	94	2 x 5/8	2 x 8.9	3.5 + 4.4	12.4 + 13.3	1668	2008	126	36	95	
	KGV-MR-6-S	6 x 23-1/2	147	112.73	2 x 5/8	2 x 8.9	4.4 + 4.4	13.3 + 13.3	1928	2408	150	36	95	

\* Note for other lengths, please contact MVP

### STANDARD FEATURES


- Back doors for rear loading
- Silver colored PVC coated steel front panel
- CFC free injected foam insulation
- PVC coated steel gray interior
- Black steel kick plate
- Retractable Night Curtain
- Foamed polystyrene black end panels
- Height adjustable shelves can be tilted
- Product stops on all shelves
- Temperature and defrost regulated by a digital controller
- Levelling feet

### OPTIONAL FEATURES

- Other colors available
- Stainless steel exterior and / or interior
- Additional shelves
- Price tag molding
- Product dividers
- Joining Kit
- Partition

### WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

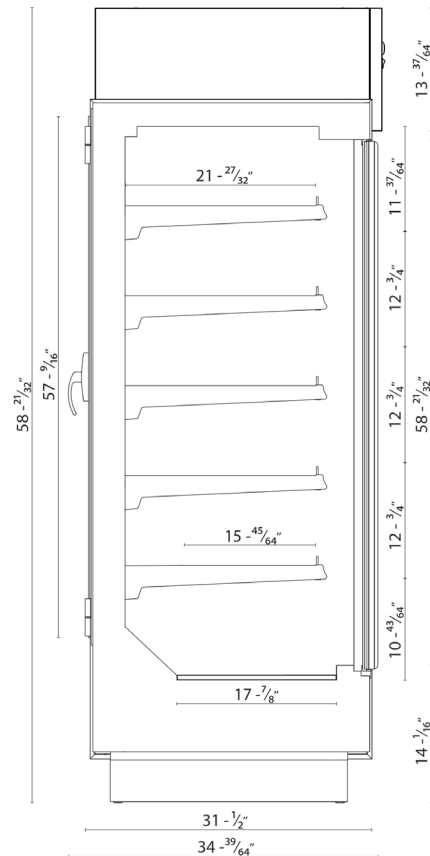

### NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-7/8" each. Ventilation grills at front and back cannot be blocked. Floor drain must be provided. Cases must be hard wired – no plugs.