

KMS-1122MLH

SERENITY SERIES

CUBER ICE MACHINE

Item # _____

Project: _____

Qty: _____
 *AutoCad available on KCL

KMS-1122MLH

4/13

Item # 13321

CUBER DIMENSIONS

W x D x H

KMS-1122MLH
 22 x 18 x 31^{1/4}

CONDENSING UNIT DIMENSIONS



W x D x H

Installation Dimension*
SRK-12H / SRK-12H3
 52^{3/8} x 19^{1/2} x 43
 *Dimensions include legs

Actual Dimension
SRK-12H / SRK-12H3
 50 x 17 x 28




KMS-1122MLH
 Remote Air-Cooled

- Up to 1120 lbs. of ice production per 24 hours
- Ice on beverage design
- Less heat in the kitchen
- Minimized noise
- Durable stainless steel exterior (including rear panel)
- Individual crescent cube
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- CFC / HFC Free foam
- R-404A Refrigerant

* The KMS-1122MLH is ENERGY STAR qualified.

*KM CUBE DIMENSIONS



*Approximate size, image not to scale.



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

A City Discount

HOSHIZAKI

KMS-1122MLH SERENITY SERIES

DIMENSIONS
W x D x H
KMS-1122MLH
22 x 18 x 31^{1/4}

Installation Dimension*
SRK-12H / SRK-12H3
52^{3/8} x 19^{1/2} x 43
*Dimensions include legs

Actual Dimension
SRK-12H / SRK-12H3
50 x 17 x 28

REMOTE AIR-COOLED / SRK-12H

Water Temp° F.	50°	70°	90°
Air Temp° F.	70°	1100	1066
	80°	1074	1022
	90°	1066	985

REMOTE AIR-COOLED / SRK-12H3


Water Temp° F.	50°	70°	90°
Air Temp° F.	70°	1120	1085
	80°	1093	1039
	90°	1085	1000

UTILITY CONSUMPTION


Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs. 90/70	Condenser Water Gal. per 100 lbs. 90/70
	Lbs.	Cubes			
KMS-1122MLH with SRK-12H	17.1	880	4.65	19.5	N/A
KMS-1122MLH with SRK-12H3	17.1	880	4.6	19.5	N/A

SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KMS-1122MLH with SRK-12H	Remote Air-Cooled	11.2	20	150 lbs. 275 lbs.
KMS-1122MLH with SRK-12H3	Remote Air-Cooled	10.5	20	150 lbs. 275 lbs.

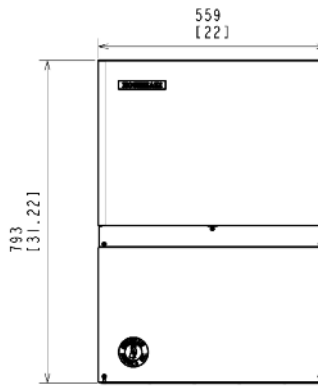


FRONT VIEW

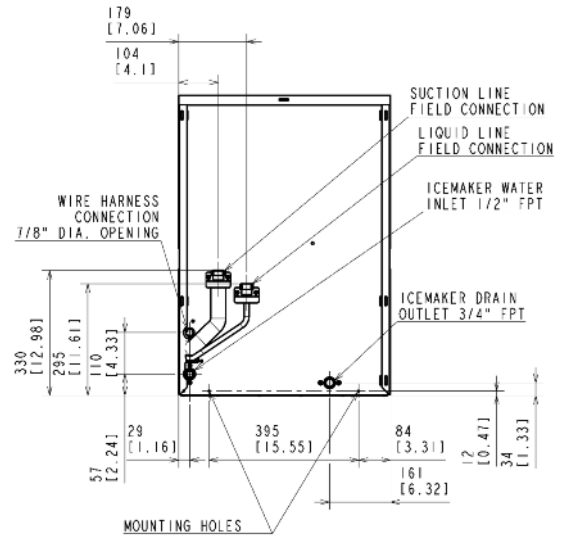

BACK VIEW

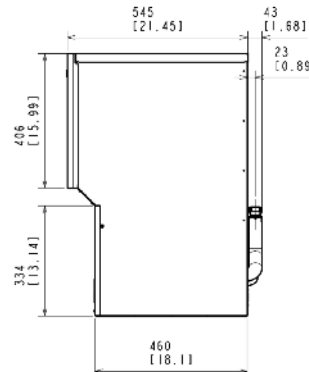


SIDE VIEW




BOTTOM VIEW

SRK-12H(3) Remote Condensing Unit (Sold Separately)
For Use with KMS-1122MLH

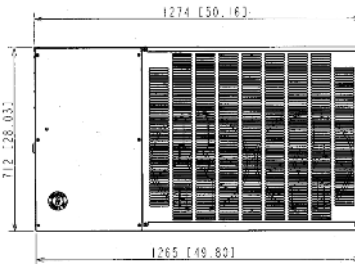

FRONT VIEW

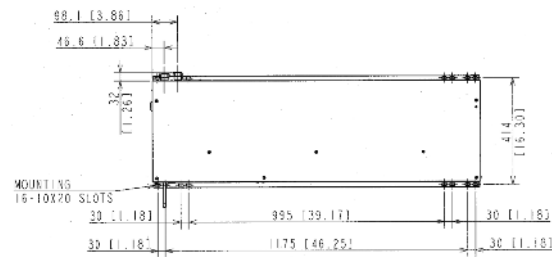

TOP VIEW

Pre-Charged Tubing Kits (Sold Separately)
• 20' R404-20810
• 35' R404-35810
• 55' R404-55810



Voltage supply for the KMS Ice Maker is supplied from the SRK Remote Condenser.

ELECTRICAL & PLUMBING / KMS-1122MLH

- 115V/60/1 - Voltage supply for the KMS Ice Maker is supplied from the SRK Remote Condenser
- 1/2" FPT copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

CONDENSER UNIT / SRK-12H

- 208-230/60/1
- 20 amp Max Fuse/HACR Breaker Size

CONDENSER UNIT / SRK-12H3

- 208-230/60/3
- 20 amp Max Fuse/HACR Breaker Size

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V - Voltage supply for the KMS Ice Maker is supplied from the SRK Remote Condenser

SERVICE

- Panels easily removed and all components accessible for service.

CONDENSING UNIT

- Voltage Range 187 - 253V
- Ambient Temp Range -22 - 122° F



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-428-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

A City Discount

