

# KATANA 6 - KATANA 12/12 PTO - KATANA 20 VV

Horizontal bowl cutters



KATANA 6



KATANA 12 PTO



KATANA 12



- Designed for high volume production, the Katana series provides homogeneous product texture
- Continuous feed of meats, cheese, salads, dips, spreads, breads and emulsified sausage batters
- Stainless steel AISI 304 construction, for durable long life
- Cutlery grade 3-blade hub to efficiently decrease processing time for faster results, 5000 cuts per minute
- 3-blade Hub driven by powerful ventilated asynchronous motor at 1680 rpm
- Removable bowl cover, 3-blade hub and bowl without tools, for easy cleaning and thorough sanitation.
- Maximum protection against liquid infiltration on the shaft
- Rubber feet
- Bowl cover safety interlock
- Thermal overload motor protection
- ON/OFF s/steel keypad, IP 67 waterproof.
- No voltage release

## KATANA 12 PTO

comes standard with PTO hub

## Optional

- Serrated 3-blades hub
- Unsharpened 3-blades hub
- Smooth edge 3-blades hub

## Specifications

Construction:	Stainless steel body
Electrical Katana 6:	110-120V AC, 60Hz, single-phase, 6.8A - 1 HP
Electrical Katana 12:	110-120V AC, 60Hz, single-phase, 12.6A - 2 HP
Electrical Katana 20:	220-240V AC, 60Hz, single-phase, 7A - 3,25 HP
Plug & Cord:	Attached plug, flexible, 6' long cord. 3 wire SJT 18 AWG, NEMA 5-15 P (Katana 6) 3 wire SJT 14 AWG, NEMA 5-15 P (Katana 12)
Controls:	ON/OFF stainless steel keypad. IP 67 waterproof. No voltage release.



Certified to UL Standard 763 and NSF Standard 08  
 Certified to CSA Standard C22.2

**KATANA 6 - 12**



NSF Standard 08  
**KATANA 20**



**STANDARD**  
 Hub with 3 blades



**OPTIONAL**  
 Hub with 3 serrated blades



**OPTIONAL**  
 Hub with 3 unsharpened  
 beating blades



**OPTIONAL**  
 Hub with 3 smooth edge





**KATANA 20 VV**



Removable bowl cover, 3-blade hub and bowl without tools,  
 for easy cleaning and thorough sanitation



Optional thermometer on lid

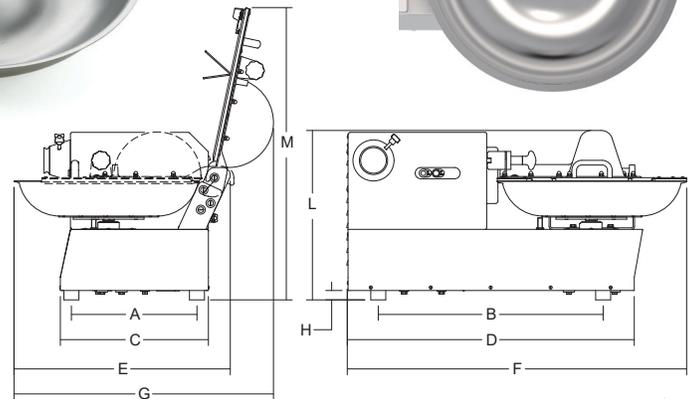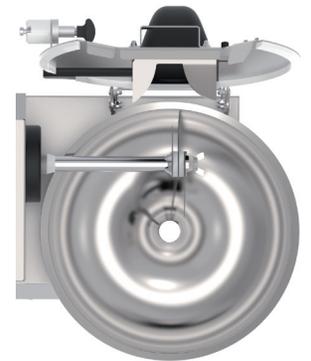

	Power	Power source	Bowl capacity	Bowl rotation	3-blade hub rotation	A	B	C	D	E	F	G	H	L	M	Net weight	Shipping	Gross weight
	watt/Hp		qt	r.p.m.	r.p.m.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
<b>KATANA 6</b>	750/1	110-120V AC, 60Hz, 6.8A	6,3	17	1.680	11 <sup>3/4</sup> "	21 <sup>1/4</sup> "	14"	28"	20 <sup>1/3</sup> "	32 <sup>1/4</sup> "	23"	3 <sup>5/8</sup> "	18 <sup>5/8</sup> "	30"	134	32" x 48" x 34"	220
<b>KATANA 12</b>	1400/2	110-120V AC, 60Hz, 12.6A	12,7	17	1.680	13 <sup>3/16</sup> "	23 <sup>5/8</sup> "	15 <sup>1/2</sup> "	29 <sup>13/16</sup> "	23 <sup>1/8</sup> "	35 <sup>1/2</sup> "	26 <sup>3/4</sup> "	3 <sup>5/8</sup> "	20"	33 <sup>1/2</sup> "	156	32" x 48" x 34"	240
<b>KATANA 12 PTO</b>	1400/2	110-120V AC, 60Hz, 12.6A	12,7	17	1.680	13 <sup>3/16</sup> "	23 <sup>5/8</sup> "	15 <sup>1/2</sup> "	29 <sup>13/16</sup> "	23 <sup>1/8</sup> "	35 <sup>1/2</sup> "	26 <sup>3/4</sup> "	3 <sup>5/8</sup> "	20"	33 <sup>1/2</sup> "	156	32" x 48" x 34"	240
<b>KATANA 20 VV</b>	2387/3.25	220-240V AC, 60Hz, 7A +/-10%	21	17	600/2.600	15 <sup>23/64</sup> "	25 <sup>19/32</sup> "	17 <sup>23/32</sup> "	32 <sup>9/32</sup> "	27 <sup>9/16</sup> "	39 <sup>7/8</sup> "	32 <sup>23/64</sup> "	3 <sup>5/8</sup> "	19 <sup>61/64</sup> "	37 <sup>13/64</sup> "	203	39 <sup>3/8</sup> " x 47 <sup>1/4</sup> " x 31 <sup>1/2</sup> "	287