

**Refrigeration Equipment
Bar Equipment 2-glass door
Refrigerator, 15.8 cu.ft, 60" (R290)**


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

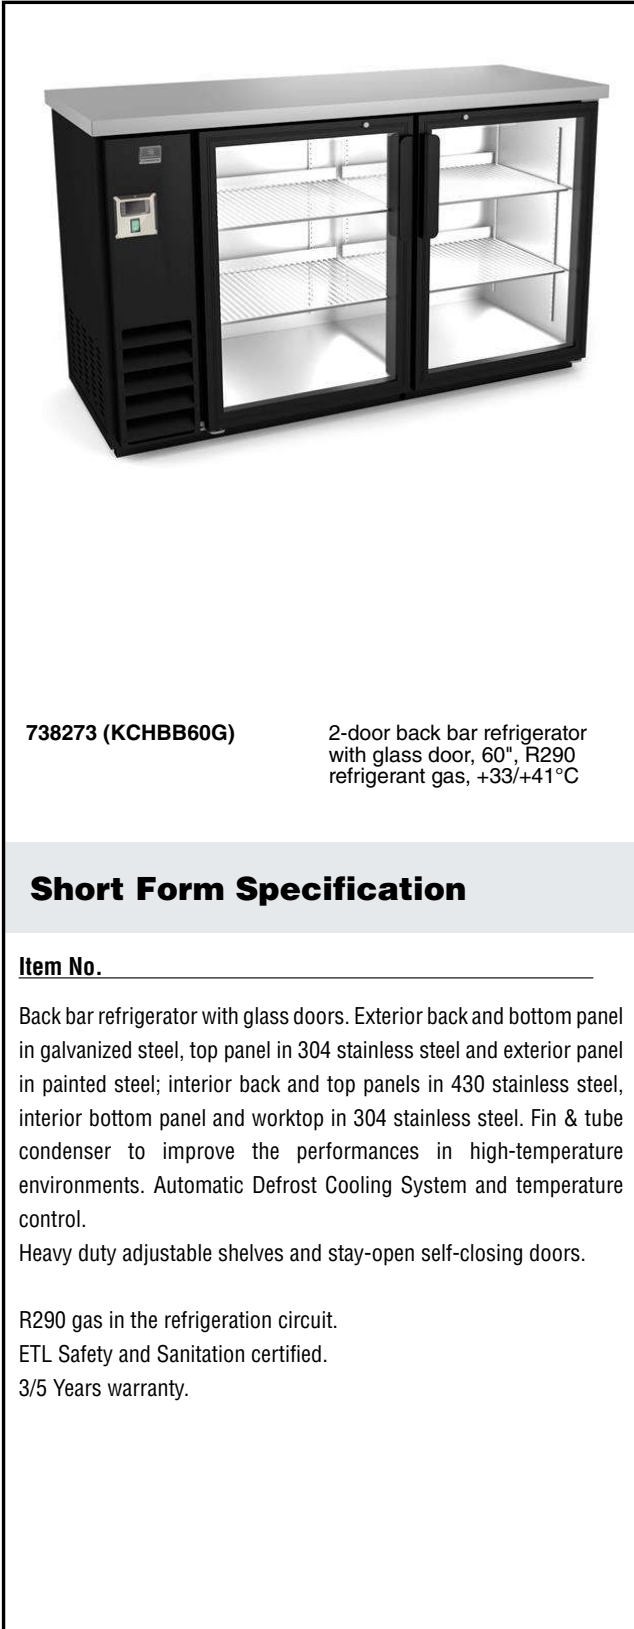

738273 (KCHBB60G)

2-door back bar refrigerator with glass door, 60", R290 refrigerant gas, +33/+41°C

Short Form Specification

Item No. _____

Back bar refrigerator with glass doors. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel in painted steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control.

Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External digital temperature display.
- External temperature display.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

Optional Accessories

- two shelves for 60" back bar (one right and one left shelves) PNC 880609
- shelf clips PNC 880611

APPROVAL: _____

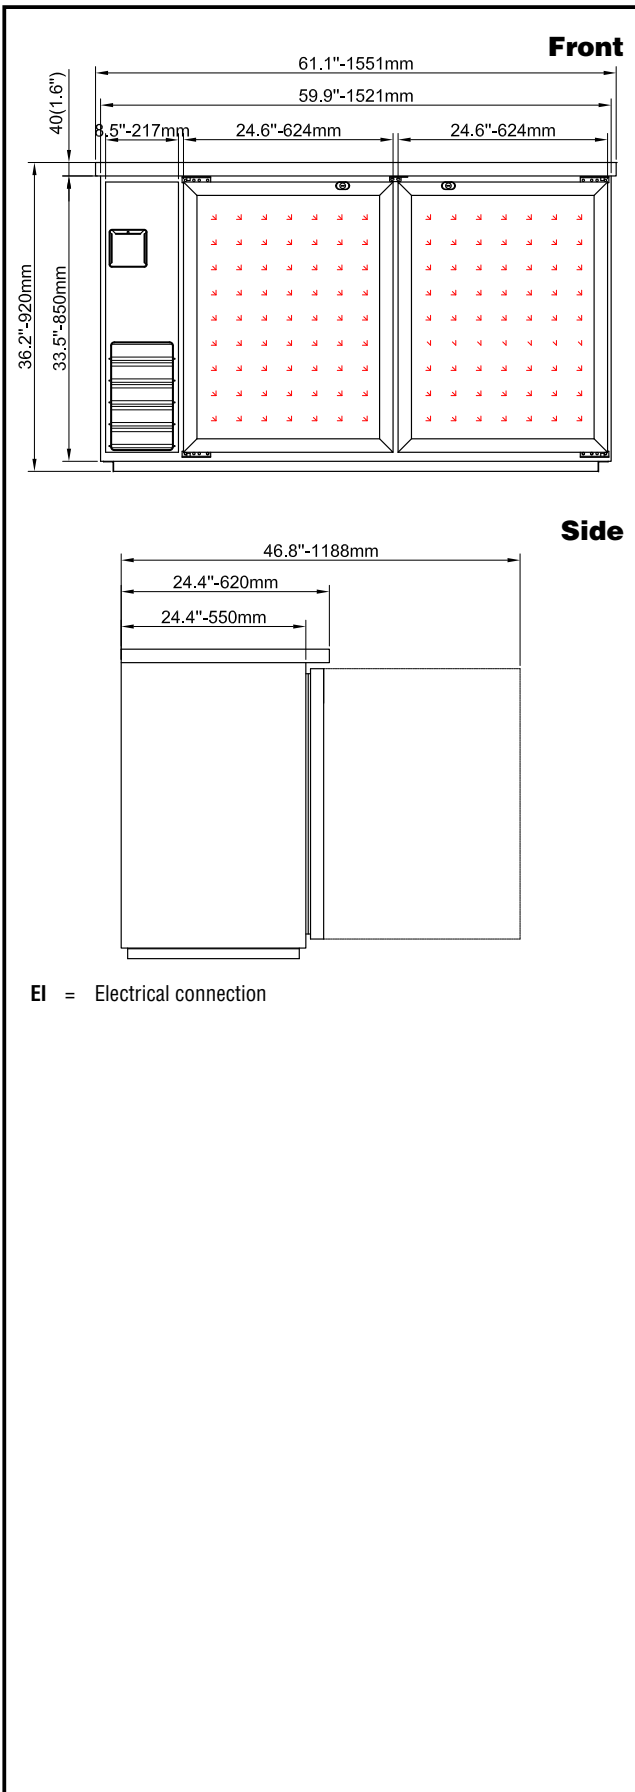

Electric

| | | |
|------------------------|-------------------|------------------|
| Supply voltage: | 738273 (KCHBB60G) | 115 V/1 ph/60 Hz |
| Electrical power, max: | | 0.3 kW |
| Current consumption: | | 3 Amps |
| Plug type: | | USA NEMA 5-15P |

Capacity:

| | |
|-----------------|--------------|
| Gross capacity: | 16.6 cu.feet |
|-----------------|--------------|

Key Information:

| | |
|--------------------------------------|--|
| Door hinges: | 1 Left+1 Right |
| External dimensions, Width: | 61 1/16" (1551 mm) |
| External dimensions, Depth: | 24 7/16" (620 mm) |
| External dimensions, Height: | 36 3/16" (919.48 mm) |
| Number and type of doors: | 2 Glass |
| Internal Dimensions (depth): | 18 1/2" |
| Internal Dimensions (height): | 28 15/16" |
| Internal Dimensions (width): | 48 3/16" |
| Shipping height: | 41 5/16" (1050 mm) |
| Shipping weight: | 357 lbs (162 kg) |
| Shipping volume: | 40.11 ft ³ (1.14 m ³) |
| Number and type of grids (included): | 4 - Vinyl-Coated Steel |
| Type of external material: | Black Prepainted Steel |
| Type of internal material: | Stainless Steel |
| Warranty: | 3 / 5 years |

Refrigeration Data

| | |
|-----------------------------|------------|
| Compressor Horsepower: | 1/5 |
| Refrigerant type: | R290 |
| Refrigerant weight: | 110 g |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |

