

## Refrigeration Equipment Reach-In Freezer, 3 Doors, 72 cu.ft - Stainless Steel

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738246 (KCHRI81R3DF)

3-door reach-in freezer,  
stainless steel, 72 cubic feet,  
R404a refrigerant gas, -9°F

### Short Form Specification

**Item No.** \_\_\_\_\_

3 full doors freezer with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel.

Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R404a gas in the refrigeration circuit.  
ETL Safety and Sanitation certifications.  
3/5 Years warranty.

### Main Features

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- Interior LED light to save energy and for best internal visibility.


### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

### Optional Accessories

- shelf for 54" and 81" (left/right) reach-in  PNC 880591
- middle shelf for 81" reach-ins  PNC 880592
- shelf clips  PNC 880611

APPROVAL: \_\_\_\_\_

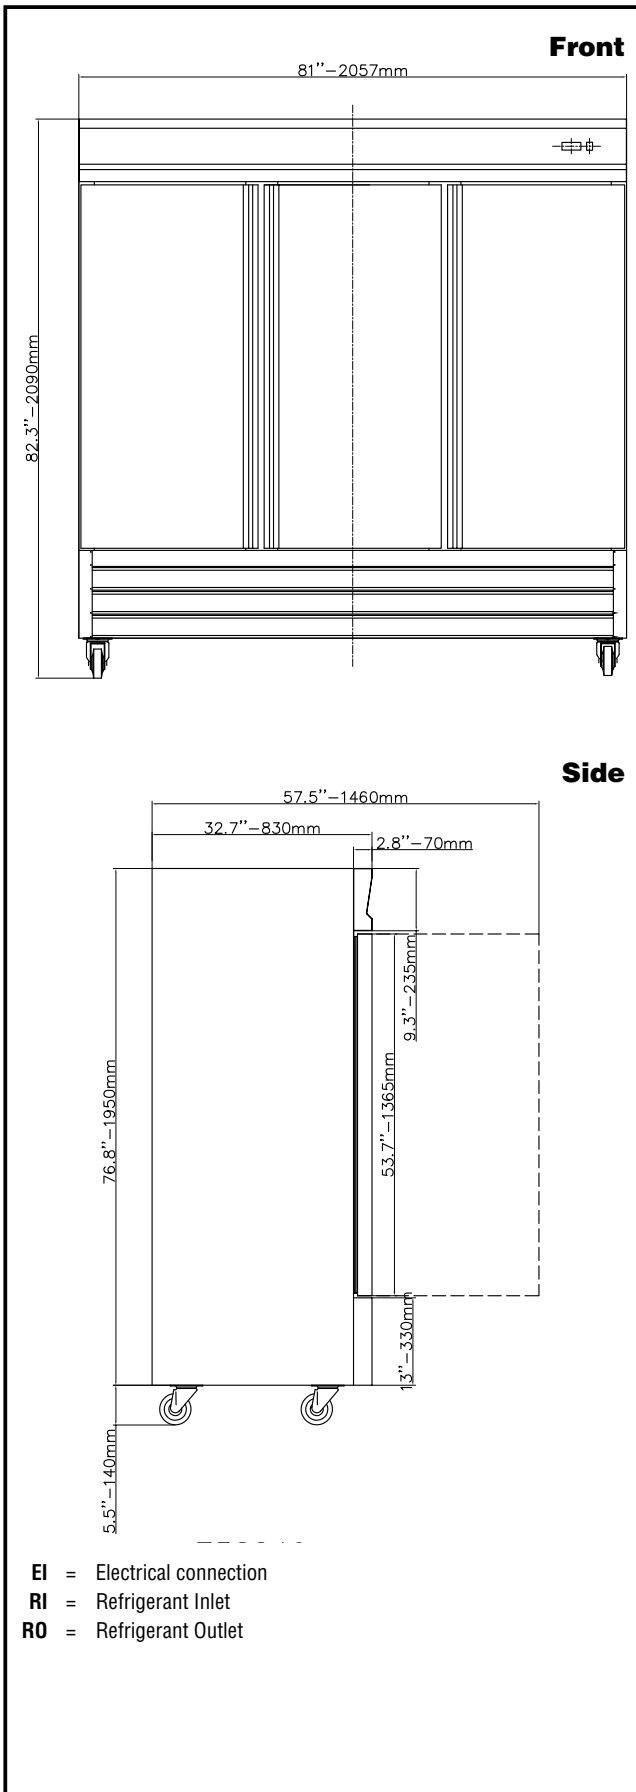

### Electric

Supply voltage:	738246 (KCHRI81R3DF)	230 V/1 ph/60 Hz
Electrical power, max:		1 kW
Current consumption:		8 Amps
Plug type:		USA NEMA L14-20P

### Key Information:

Capacity (Cu.Ft.)	72
Door hinges:	1 Left+2 Right
External dimensions, Width:	81 " (2057 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	82 1/4" (2090 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	27 1/16"
Internal Dimensions (height):	60 1/4"
Internal Dimensions (width):	76 5/16"
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	776 lbs (352 kg)
Shipping volume:	139.55 ft <sup>3</sup> (3.95 m <sup>3</sup> )
Number and type of grids (included):	9 - Coated Steel
Compressor Horsepower:	1 1/4
Type of external material:	430 AISI
Type of internal material:	304 AISI
Warranty:	3 / 5 years

### Refrigeration Data

Refrigerant type:	R404A
Refrigerant weight:	0 g
Operating temperature min.:	-7.6 °F
Operating temperature max.:	-4 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost