





# HOSHIZAKI

Series

KM1300M\_H  
Item # 13034  
05/04

KM-1300M\_H SERIES



MODULAR CRESCENT ICE CUBER



KM-1300MAH Cuber  
Shown on Optional  
B-900 Bin

**KM-1300MAH**  
Air-Cooled  
**KM-1300MWH**  
Water-Cooled  
**KM-1300MRH**  
Air-Cooled Remote

ICEMAKER DIMENSION	
Width x Depth x Height	
<b>KM-1300M_H</b>	
30 x 27 <sup>3</sup> / <sub>8</sub> x 41 <sup>1</sup> / <sub>2</sub> "	
DIMENSION BYBIN SIZE	
Width x Depth x Height	
<b>B-500</b>	30 x 32 <sup>1</sup> / <sub>2</sub> x 87 <sup>1</sup> / <sub>2</sub> "
<b>B-700</b>	44 x 32 <sup>1</sup> / <sub>2</sub> x 87 <sup>1</sup> / <sub>2</sub> "
<b>B-800</b>	48 x 32 <sup>1</sup> / <sub>2</sub> x 87 <sup>1</sup> / <sub>2</sub> "
<b>B-900</b>	52 x 32 <sup>1</sup> / <sub>2</sub> x 87 <sup>1</sup> / <sub>2</sub> "

- Durable stainless steel exterior
- CycleSaver® design 
- EverCheck® alert system 
- Up to 1322 lbs. of ice production per 24 hours
- Individual crescent cube
- Stainless steel evaporator
- Removable air filters (Air-Cooled model only.)



Reliability is a beautiful thing™



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

# KM-1300M\_H SERIES


# DIMENSIONS (Inches) - CONNECTIONS

## CRESCENT ICE CUBER SLIM-LINE MODULAR

**KM-1300MAH** (AIR-COOLED)

**KM-1300MWH** (WATER-COOLED)

**KM-1300MRH** (AIR-COOLED REMOTE)



■ Up to 1322 lbs. of ice production per 24 hours



<b>WARRANTY</b> THREEYEAR - Parts & labor on entire machine. FIVEYEAR - Parts & Labor on : Evaporator FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser Coil.	<b>STAINLESS STEEL</b> <b>INTERNAL EVAPORATOR</b>	<b>SERVICE</b> Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	<b>R-404 REFRIGERANT</b>	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

**OPTIONAL STORAGE BINS**


B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin)  
 B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin)  
 B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin)  
 B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin)  
 B-1200 - 1200 lb. Application Capacity  
 B-1500 - 1500 lb. Application Capacity

**OPERATING LIMITS**

Ambient Temp Range 45 - 100°F  
 Water Temp Range 45 - 90°F  
 Voltage Range 187-253V  
 Water Pressure 10 - 113 psig

**ELECTRICAL & PLUMBING**

208-230/60/1 (3 wire with dedicated neutral for 115V)  
 20 amp Max Fuse/HACR Breaker Size  
 1/2" OD copper or equivalent  
 independent potable water supply  
 3/4" independent drain connection

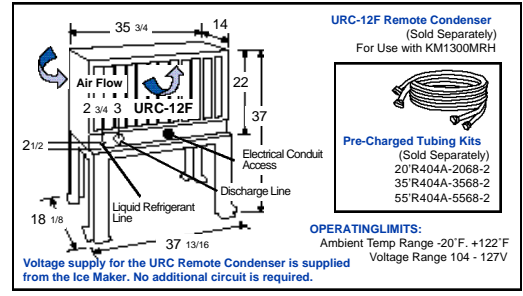

**AIR - COOLED**

Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	1289	1222
	80°	1238	1133
	90°	1222	1059

**WATER - COOLED**

Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	1291	1271
	80°	1276	1244
	90°	1271	1222

**AIR - COOLED REMOTE**

Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	1322	1281
	80°	1291	1228
	90°	1281	1183

**UTILITY CONSUMPTION**

Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-1300MAH	28.6	1440	6.0	32.3	NA
KM-1300MWH	28.6	1440	4.1	30.6	76
KM-1300MRH	28.6	1440	5.3	32.0	NA

**SPECIFICATIONS**

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1300MAH	Air-Cooled	13.2	20	322 lbs.
KM-1300MWH	Water-Cooled	11.5	20	322 lbs.
KM-1300MRH	A-C Remote	13.5	20	332 lbs.

