






# HOSHIZAKI

## Series

KM500M\_LH  
Item # 13036  
4/03



KM-500M\_H SERIES



**KM-500MAH Cuber  
Shown on Optional  
B-300 Bin**

**KM-500MAH**  
Air-Cooled  
**KM-500MWH**  
Water-Cooled  
**KM-500MRH**  
Air-Cooled Remote

<b>ICEMAKER DIMENSION</b>	
Width x Depth x Height	
<b>KM-500M_H</b>	
22 x 27 <sup>3</sup> / <sub>8</sub> x 30 <sup>5</sup> / <sub>16</sub>	
<b>DIMENSION BYBIN SIZE</b>	
Width x Depth x Height	
<b>B-300</b>	22 x 32 <sup>1</sup> / <sub>2</sub> x 76 <sup>5</sup> / <sub>16</sub>
<b>B-500</b>	30 x 32 <sup>1</sup> / <sub>2</sub> x 76 <sup>5</sup> / <sub>16</sub>
<b>B-700</b>	44 x 32 <sup>1</sup> / <sub>2</sub> x 76 <sup>5</sup> / <sub>16</sub>
<b>B-800</b>	48 x 32 <sup>1</sup> / <sub>2</sub> x 76 <sup>5</sup> / <sub>16</sub>
<b>B-900</b>	52 x 32 <sup>1</sup> / <sub>2</sub> x 76 <sup>5</sup> / <sub>16</sub>

- Durable stainless steel exterior
- CycleSaver™ design 
- EverCheck™ alert system 
- Up to 517 lbs. of ice production per 24 hours
- Individual crescent cube
- Stainless steel evaporator
- Mount two units side-by-side, in only 44" of floor space, for 1,034 lbs. per 24 hours
- Removable air filters

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

TEL1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com




Reliability is a beautiful thing®

CRESCENT ICE CUBER SLIM-LINE MODULAR

**CRESCENT ICE CUBER SLIM-LINE MODULAR**

- KM-500MAH (AIR-COOLED)
- KM-500MWH (WATER-COOLED)
- KM-500MRH (AIR-COOLED REMOTE)




- Up to 517 lbs. of ice production per 24 hours
- Mount two units side-by-side for 1,034 lbs. per 24 hours




<b>WARRANTY</b> THREEYEAR - Parts & Labor on entire machine. FIVEYEAR - Parts & Labor on : Evaporator FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser.	<b>STAINLESS STEEL</b> <b>INTERNAL EVAPORATOR</b>	<b>SERVICE</b> Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	<b>R-404 REFRIGERANT</b>	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.


<b>STORAGE BINS</b> B-300 - 300 lb. Application Capacity (260 lb. ARI-Rated Capacity Bin) B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin) B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin) B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin) B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin) B-1200 - 1200 lb. Application Capacity B-1500 - 1500 lb. Application Capacity		<b>ELECTRICAL &amp; PLUMBING</b> 115/60/1 20 amp Max Fuse/HACR Breaker Size 1/2" OD copper or equivalent independent potable water supply 3/4" independent drain connection
<b>OPERATING LIMITS</b> Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 104 - 127V Water Pressure 10 - 113 psig		

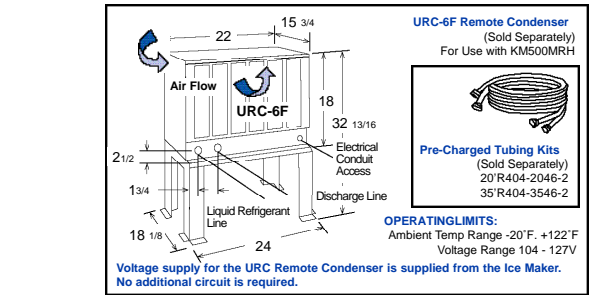

AIR - COOLED			
Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	499	468
	80°	475	427
	90°	468	<b>393</b>

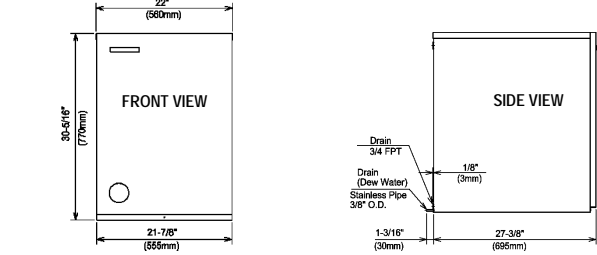


WATER - COOLED			
Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	480	471
	80°	473	458
	90°	471	<b>448</b>

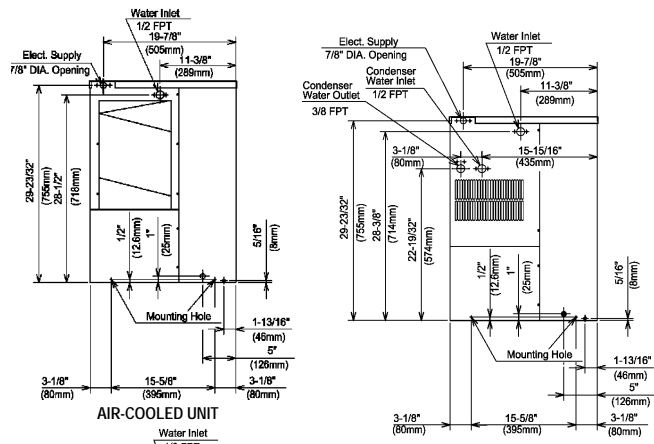

AIR - COOLED REMOTE			
Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	517	493
	80°	499	462
	90°	493	<b>436</b>

UTILITY CONSUMPTION					
Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gallons per 100 lbs.	Condenser Water Gallons per 100 lbs.
	Lbs.	Cubes			
KM-500MAH	9.5	480	7.4	28.8	NA
KM-500MWH	9.5	480	6.2	29.7	156
KM-500MRH	9.5	480	7.0	31.3	NA

SPECIFICATIONS				
Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-500MAH	Air-Cooled	13.0	20	185 lbs.
KM-500MWH	Water-Cooled	10.0	20	185 lbs.
KM-500MRH	Air-Cooled Remote	15.0	20	185 lbs.

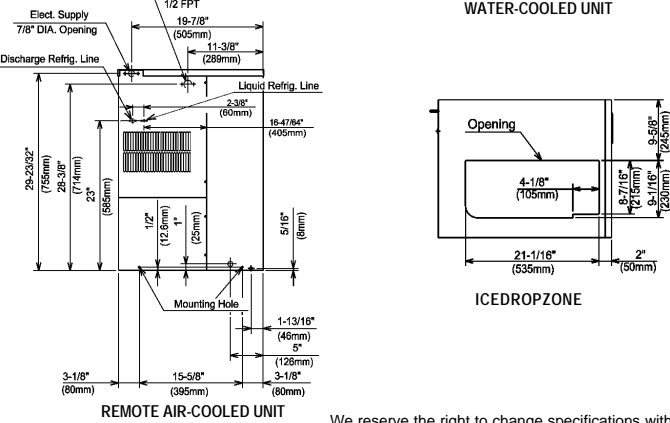

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269 TEL1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

We reserve the right to change specifications without notice.