



Model: _____ Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

E-Z Install Flexible Water Line Kits for Wall Mount Faucets


Royal Series Plumbing

Model
21-443L

3/8" E-Z Install Flexible Water Line Kit, 22" Long

STANDARD FEATURES

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes 1/2" NPT Close Elbows with Swivel Compression fittings on faucet side & 3/8" Swivel Compression fittings on water supply side
- No soldering or teflon tape required

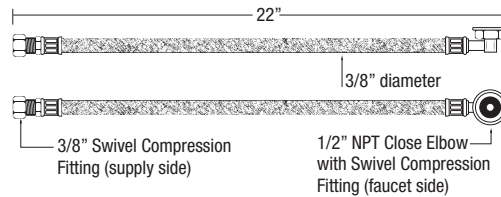

SPECIFICATIONS

Length	22"L
Diameter	3/8"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F




Model
21-444L

1/2" High Volume E-Z Install Flexible Water Line Kit, 22" Long

STANDARD FEATURES

- (2) 1/2" stainless steel braided flexible supply Hoses
- Includes 1/2" NPT Close Elbows with Swivel Compression fittings on faucet side & 5/8" OD Compression fittings which are removable to convert to 1/2" NPS Male fittings on water supply side
- No soldering or teflon tape required on faucet side

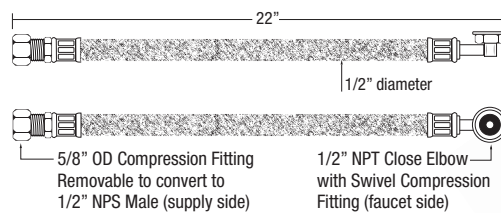

SPECIFICATIONS

Length	22"L
Diameter	1/2"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F




Model
21-445L

3/8" E-Z Install Flexible Water Line Kit, 30" Long with Mounting Hardware

STANDARD FEATURES

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes 1/2" NPT Close Elbows with Swivel Compression fittings on faucet side & 3/8" Swivel Compression fittings on water supply side
- (2) 1/2" NPT Nipples, (2) washers, (2) locknuts
- No soldering or teflon tape required

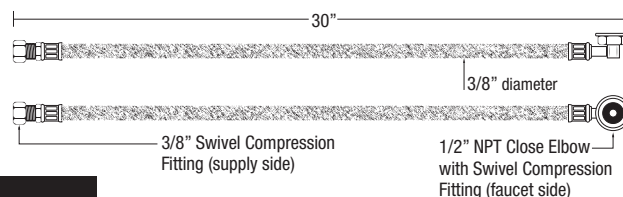

SPECIFICATIONS

Length	30"L
Diameter	3/8"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F




Model
21-193L

3/8" E-Z Install Traditional Flexible Water Line Kit, 24" Long with Mounting Hardware

STANDARD FEATURES

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes (2) 1/2" x 1/2" NPT Close Elbows, (2) 1/2" NPT Nipples, (2) washers, (2) locknuts
- 1/2" Compression fittings on faucet side and 3/8" Swivel Compression fittings on water supply side
- No soldering or teflon tape required

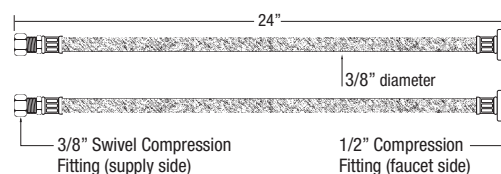

SPECIFICATIONS

Length	24"L
Diameter	3/8"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F

