

LIGHT DUTY MODEL LC-50

APPLICATION

Designed for light duty foodservice operation in:


- Convenience/grocery store deli's
- Fast food restaurants
- Church/office kitchens
- · Bed and breakfast inns

IMPORTANT: The model LC-50 is designed specifically for **light duty** foodservice use. Use of this disposer in applications other than those named above may void your warranty. If you are unsure of a potential application, call the factory at 1-800-845-8345.

PRODUCT FEATURES & SPECIFICATIONS

- Foodservice design with the ease and flexibility of a household unit
- Disposer mounting included with unit. Mounting fits standard 3-1/2 4" (88.9 mm 101.6 mm) sink opening. No welding required.
- Standard wall switch operates the disposer
- Automatic reversing motor for longer life and trouble-free operation
- Stainless steel grind chamber
- Cast nickel chrome cutting element
- 1-year full warranty from date of installation
- 35 lb. (15.9 kg) shipping weight
- 1/2 HP
- Continuous-duty commercial motor
- 1725 RPM
- 5.8 amps
- Single Phase

DIMENSIONS

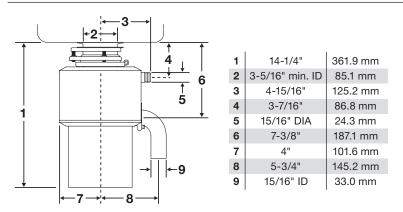

NOTE: Plumb 1-1/2" (38.1 mm) waste line to prevent standing water in disposer motor housing.

ŰŲL

(SP

4700 21st STREET

RACINE, WI 53406

TEL: 800-845-8345

FAX: 262 554-3620

www.insinkerator.com

Our products appear on *The KCL CADalog* CD-ROM based CAD Foodservice Symbol Library. More information is available from **Kochman Consultants, Ltd.** at www.kclcad.com.







InSinkErator is a division of Emerson Electric Co.

FOODSERVICE

sink erator

A City Discount

NOM

InSinkErator ©2008 Printed in USA


Form No. F198-08J-45-02




ELECTRICAL SPECIFICATIONS

LC50-11 – 120V, 60 Hz, 5.8 amps, UL/CUL

- LC50-12 230V, 50/60 Hz, 375 watts
- □ LC50-13 220-240V, 50 Hz, 375 watts, BEAB, supplied with shuko plug
- LC50-14 120V, 60 Hz, 5.8 amps, NOM

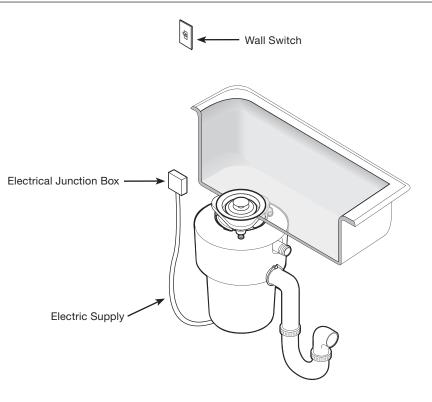

INSTALLATION WITH REMOTE AIR SWITCH AND OPTIONAL DIRECT WATER CONNECTION

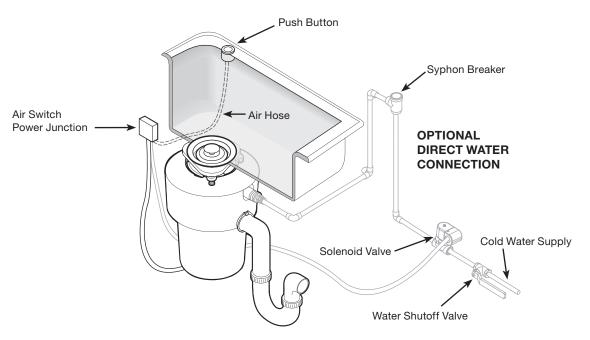

NOTE: InSinkErator Commercial Air Switch (Part No. 13754) is available for 120V model only.