



“WE MAKE THE KITCHEN BETTER!”

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois, New Jersey, Ohio, Texas, Washington

# Back Bar Coolers

## Standard Features

- Stainless steel exterior & interior
- Electronic Temperature Controller
- Maintains temperatures between 33°F to 40°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Recessed door handle(s)
- Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters

**MODELS:**  
 MBB23GR / MBB48GR / MBB59GR / MBB69GR / MBB90GR



**MBB23GR**



**MBB48GR**



**MBB59GR**



**MBB90GR**



**MBB69GR**

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY  
5 YEAR COMPRESSOR PART WARRANTY





**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: info@atosausa.com**

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,


New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS


| Models  | Door | Capacity (Cu.Ft.) | Shelves | Casters (inch) | Rated Current (A) | Voltage (V/Hz/Ph) | HP  | Refrigerant | Exterior Dimensions (inch)                                 | Net Weight (lbs) | Gross Weight (lbs) |
|---------|------|-------------------|---------|----------------|-------------------|-------------------|-----|-------------|--|------------------|--------------------|
| MBB23GR | 1    | 8.2               | 2       | 3.5            | 2.3               | 115/60/1          | 1/7 | R290        | 23×29 <sup>1/2</sup> ×38 <sup>4/5</sup>                    | 170              | 207                |
| MBB48GR | 2    | 13.4              | 4       | 2.5            | 2.3               | 115/60/1          | 1/7 | R290        | 48×28 <sup>1/10</sup> ×40 <sup>1/10</sup>                  | 192              | 240                |
| MBB59GR | 2    | 17.3              | 4       | 2.5            | 2.3               | 115/60/1          | 1/6 | R290        | 57 <sup>4/5</sup> ×28 <sup>1/10</sup> ×40 <sup>1/10</sup>  | 214              | 262                |
| MBB69GR | 2    | 21.5              | 4       | 2.5            | 2.3               | 115/60/1          | 1/6 | R290        | 68×28 <sup>1/10</sup> ×40 <sup>1/10</sup>                  | 238              | 295                |
| MBB90GR | 3    | 30.1              | 6       | 2.5            | 2.8               | 115/60/1          | 1/6 | R290        | 89 <sup>3/10</sup> ×28 <sup>1/10</sup> ×40 <sup>1/10</sup> | 295              | 370                |

## PLAN VIEW


**MBB23GR**

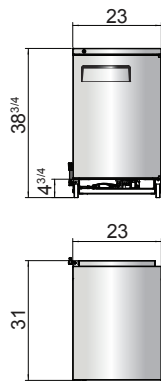


**MBB48GR**

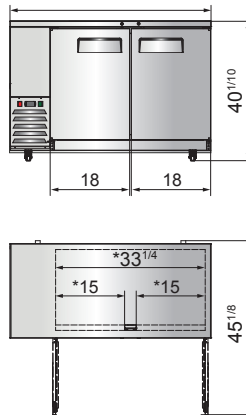



**MBB59GR**

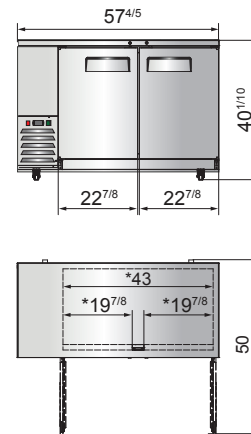

**MBB69GR**

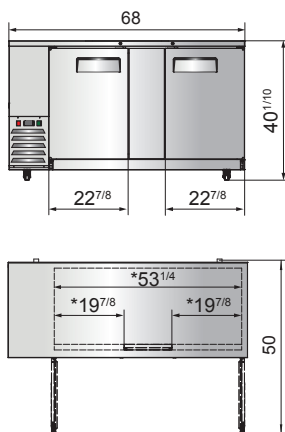


**MBB90GR**

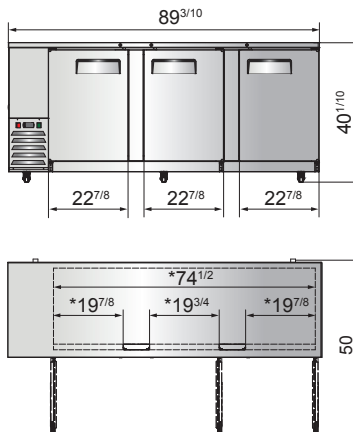

\*Interior Dimensions

Epoxy shelves



Door lock



Temperature control



Recessed handles



**NEMA 5-15P**

