

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax# 1-336-245-6453 http://www.Beverage-Air.com

Commercial Refrigeration Equipment General Specification

MARKETMAX™ MERCHANDISER SERIES—GLASS DOOR MERCHANDISER

Triple section glass door merchandiser with lighted sign panel used for merchandising and storage of frozen food, frozen novelty items and cold product.

CABINET CONSTRUCTION

Heavy duty construction includes white coated steel interior walls. Exterior finish is heavy-duty steel with a baked on durable coating. Choose from black or white finish. S/S exterior and black interior options are available.

Foamed-in-place CFC and HCFC-free polyurethane insulation. Modern, one-piece grille is easily removed for cleaning and servicing.

Refrigerators have double pane, lowE argon filled glass doors. Freezer models have heated triple pane glass. Inside and outside panes are tempered for added safety. Anti-microbial door handles are standard. Doors provide automatic hold-open feature.

Brightly lighted sign panel.

SHELVING

Five (5) heavy duty epoxy coated wire shelves per section standard. Four (4) shelf clips included per shelf (field installed). Shelves are adjustable in ½" increments.

ELECTRONIC CONTROL

Electronic thermostat with manual defrost button provides a digital display of cabinet temperatures, which includes status indicators and key pad for any necessary temperature adjustments.

REFRIGERATION

Self-contained bottom mount refrigeration system. Expansion valve refrigerant control on freezer provides quick temperature pull down and reduces compressor run time—meaning reduced energy consumption. Includes automatic condensate disposal. Refrigerators utilize ozone friendly R134a refrigerant. Freezers utilize ozone friendly R404A refrigerant and its defrost system is fully automatic, time-initiated and temperature terminated operation.


Freezer product temperatures from –10°F to –15°F. Refrigerator product temperatures from 36°F to 38°F.

ELECTRICAL

Interior fluorescent lighting enhances product illumination.

Optional LED lighting provides hidden light source for increased product visibility. LED bulbs last up to 10 times longer compared to fluorescent bulbs and renders additional energy savings due to reduced wattage load on compressor.

Refrigerator units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. **MMF72** freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hardwired).



HINGED GLASS DOOR MARKETMAX[™] MERCHANDISER SERIES

MM72 Refrigerator and Freezers
Triple Door

MODELS: MMR72-1-B MMR72-1-W MMR72-1-W-LED MMR72-1-W-LED MMF72-5-B MMF72-5-W MMF72-5-B-LED MMF72-5-W-LED



MMR72-1-B

(SHOWN IN BLACK EXTERIOR)
White and S/S Exterior
finishes available

SPECIAL FEATURES

- MMR72 and MMF72 have earned the ENERGY STAR[®]
- Anti-microbial door handles
- Electronic control with digital display
- Brightly lighted sign panel
- Optional LED lighting
- <u>Available options:</u> S/S Exterior, Black Interior, Wine Racks, Spring Feed Dividers, Casters, Audible Alarm With PM Feature, Smart Defrost



ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.













Available From:

| Model Specified | Store# |
|-----------------|----------|
| Location | Quantity |




MarketMax™ Glass Door Merchandisers

Model: MMR72, MMF72

| MODEL | MMR72 | MMF72 |
|--|------------------|-----------------|
| EXTERNAL DIMENSIONAL DATA | | |
| Length Overall (inches) Length Overall (mm) | 75" 1905 | 75" 1905 |
| Depth Overall (inches) - includes handle Depth Overall (mm) - includes handle | 33 3/4" 857 | 33 3/4" 857 |
| Height Overall— (inches) Height Overall— (mm) | 78" 1981 | 78" 1981 |
| Number of doors | 3 | 3 |
| Depth with Door Open 90 ° | 55" | 55" |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) NET Capacity (Liters) | 72 2039 | 72 2039 |
| Internal Length Overall (inches) Internal Length Overall (mm) | 72" 1829 | 72" 1829 |
| Internal Depth Overall (inches) Internal Depth Overall (mm) | 28 1/2" 724 | 28 1/2" 724 |
| Internal Height Overall—(inches) Internal Height Overall—(mm) | 61 3/4" 1569 | 61 3/4" 1569 |
| Number of shelves | 15 | 15 |
| ELECTRICAL DATA | | |
| Full Load Amperes | 115/60/1 (9.9 A) | 208-230V (15 A) |
| REFRIGERATION DATA | | |
| Horsepower | 1/3 | (2) @ 1/2 hp |
| WEIGHT DATA | | |
| Gross Weight (Crated lbs) | 715 | 775 |
| Gross Weight (Crated kg) | 324 | 352 |

PLAN VIEWS

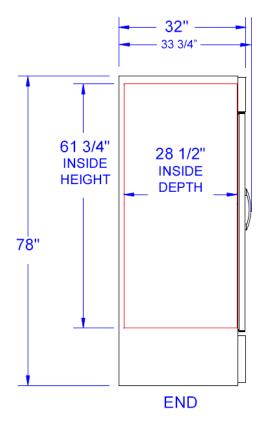















*Note: Not all markings may apply to all model variations.
*Note: Freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hard-wired).





BEVERAGE-AIR® CORPORATION