

# Heater Proofers - Non-Insulated Standard Full & 1/2 Height 100% Pre-Tested Electrical Assembly

- Heavy Duty, aluminum construction designed for durability.
- Easy to Clean.
- Forced air design provide even heat distribution.
- 5" polyurethane plate casters for easy maneuverability and stability. Front casters are provided with brakes.
- Easy dual proof/heat control:
- "Proof/humidity" mode: Up to 95% humidity at 110°F (43°C)
- "Heat" mode: Maximum Temperatures up to 180°F (82°C)
- Corner bumpers provide protection to unit, associates & fixtures.
- Clear door, extruded, anodized aluminum frame will not dull. A tight fit gasket is installed on the inside door frame.
- Door opens 270 degrees. Door lifts off for easy cleaning and accessibility.
- Control drawer is removable for quick and easy cleaning and maintenance.
- Drip trough catches condensation. Internal water pan collects condensation or is used in proofer mode.
- All controls are accessible without opening cabinet door. Easy to read real time LED thermometer display.
- Pan Capacity: 35 - 18" x 26" pans NHPL-1836C  
10 - 18" x 26" pans NHPL-1810HHC

## Electrical specifications:

- 120 Volt-60 Hz, NEMA 5-15P
- 1440 Watts: 14.0 AMPS - Plug into any standard 110 outlet.

Model Number	Order#	Overall Dimensions						Approx. Ship Wt	
		Width		Length		Height		(lb)	(kg)
		(in)	(mm)	(in)	(mm)	(in)	(mm)		
<b>NHPL-1836C</b>	<b>684684</b>	<b>21</b>	533	<b>30¾</b>	781	<b>66½</b>	1,689	<b>136</b>	106
<b>NHPL-1810HHC</b>	<b>684625</b>	<b>21</b>	533	<b>30¾</b>	781	<b>30.2/3</b>	779	<b>91</b>	41


### Caster Information

Swivel Plate Caster with 5" Polyurethane Wheel 738A (128784)  
Swivel Plate Caster with 5" Polyurethane Wheel & Brake 738ABK (204185)  
5" Polyurethane Wheel 7112 (122180)

Freight Class: 100



**Items highlighted in red are Express Ship!**  
**See details on page 148**

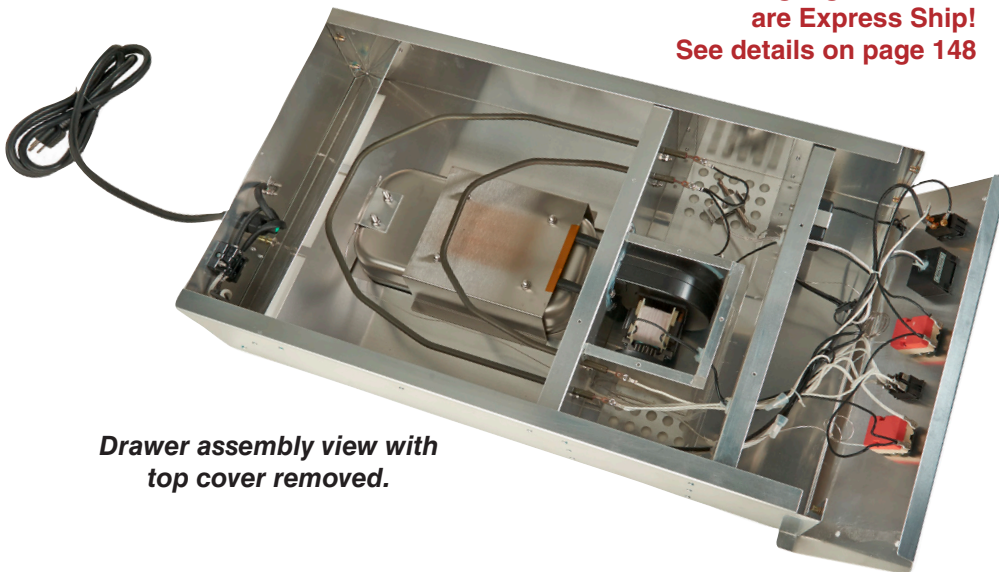

**Drawer assembly view with top cover removed.**



**NHPL-1836C**



**NHPL-1810HHC**  
**Fits under counters and tables.**

For replacement parts please see page 143.