

NOR-LAKE, INCORPORATED
 727 Second Street
 P.O. Box 248
 Hudson, Wisconsin 54016

800-955-5253
 715-386-2323
 866-961-5253 Parts
 800-388-5253 Service
 715-386-6149 FAX
 www.norlake.com



ADVANTEDGE™ SOLID DOOR BACK BAR REFRIGERATORS



NLBB69

PROJECT:

 ITEM NUMBER:

 MODEL NUMBER:

SOLID DOOR BACK BAR REFRIGERATORS

SPECIFICATIONS FOR: NLBB59, NLBB69, NLBB79, NLBB95

- **Finish:** Heavy duty stainless steel top and black vinyl coated steel exterior front, sides and back. Galvanized steel interior walls with stainless steel floor.
- **Insulation:** Foamed-in-place 1-1/2" CFC-Free polyurethane insulation.
- **Hardware:** Solid doors with locks, magnetic door gaskets, plastic breaker strips around door openings to limit the formation of any condensation. Two adjustable epoxy coated shelves per door section standard. Interior fluorescent light.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and NEMA 5-15P Plug.
- **Refrigeration:** Self-contained forced air R-134a capillary tube refrigeration system. Temperature range from 35°F to 38°F. Adjustable temperature control.
- **Approvals:** ETL Safety and Sanitation listed

STANDARD FEATURES

- Adjustable temperature control
- Black vinyl coated steel front, sides and back exterior
- Fluorescent interior light
- Free flowing air system at all times to ensure uniformly cooled product
- Heavy duty 18 gauge stainless steel top
- Slide out condensing unit
- Temperature range: 35°F to 38°F
- Two shelves per door
- ETL Safety and Sanitation listed
- Approved to NSF standard for bottled or canned products
- Warranties: 3 year parts & labor, 5 year compressor


OPTIONAL FEATURES*

- Epoxy coated flat shelves with clips
- Floor rack
- Glass doors
- Shelves with product guides
- 3" casters




Nor-Lake, Inc.
 Registered to ISO 9001:2008
 File No. 10001816


* Most options are available two weeks from receipt of order. Please contact us for specific questions.

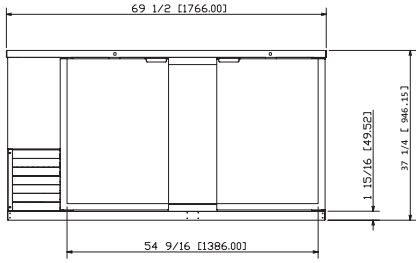


**FRONT
NLBB69**

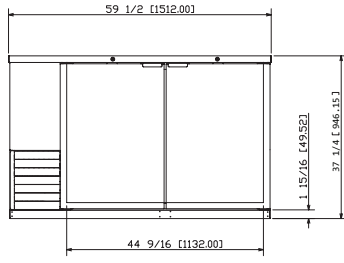


**FRONT
NLBB59**

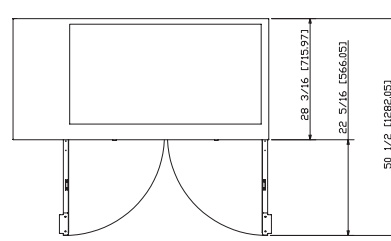


**TOP
NLBB59**

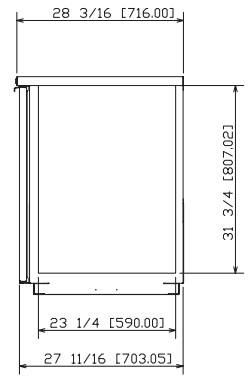


SIDE

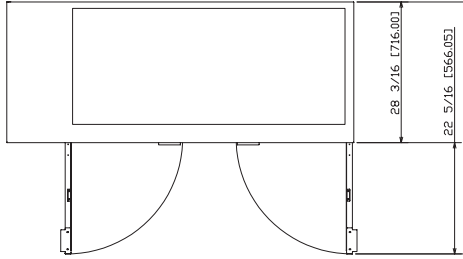


**TOP
NLBB69**

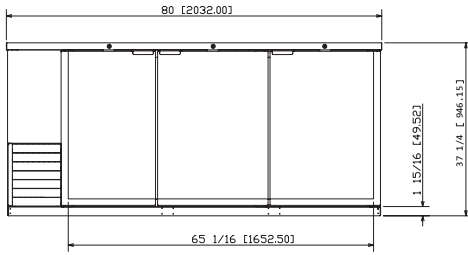


**FRONT
NLBB79**

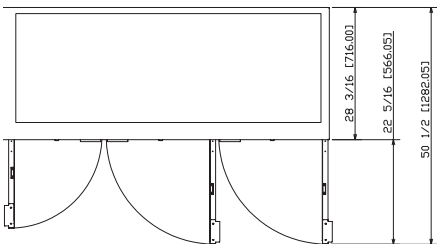

**TOP
NLBB79**

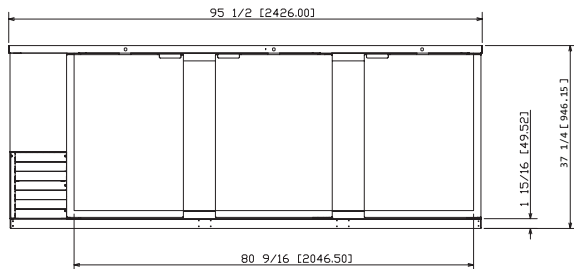

**FRONT
NLBB95**

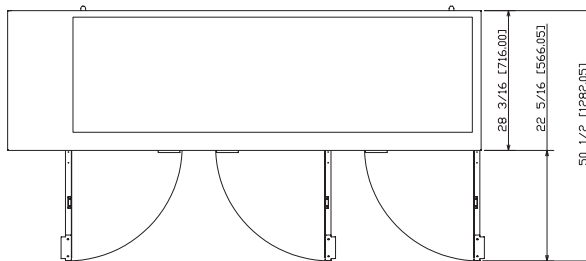

**TOP
NLBB95**



NORLAKE[®]

Revision Date: 03/13
©2013 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 143584

SPECIFICATIONS

<i>Model</i>	<i>NLBB59</i>	<i>NLBB69</i>	<i>NLBB79</i>	<i>NLBB95</i>
<i>Crated Height</i>	43"	43"	43"	43"
<i>Crated Width</i>	60-1/2"	70-1/2"	81"	96-1/2"
<i>Crated Depth</i>	30"	30"	30"	30"
<i>Crated Weight (lbs.)</i>	312	360	378	440
<i>Interior Height</i>	31-3/4"	31-3/4"	31-3/4"	31-3/4"
<i>Interior Width</i>	44-9/16"	54-9/16"	65-1/16"	80-9/16"
<i>Interior Depth</i>	24-3/4"	24-3/4"	24-3/4"	24-3/4"
<i>Overall Height</i>	37-1/4"	37-1/4"	37-1/4"	37-1/4"
<i>Overall Width</i>	59-1/2"	69-1/2"	80"	95-1/2"
<i>Overall Depth</i>	28-3/16"	28-3/16"	28-3/16"	28-3/16"
<i>Gross Cubage (ft.³)</i>	23.7 (670)	28 (793)	30.8 (872)	39.2 (1112)
<i>Number of Shelves</i>	4	4	6	6
<i>Condensing Unit Size</i>	1/3	1/3	1/3	1/3
<i>Refrigerant</i>	R134a	R134a	R134a	R134a
<i>Electrical Characteristics</i>	115/60/1	115/60/1	115/60/1	115/60/1
<i>Cord and Plug Furnished</i>	Yes	Yes	Yes	Yes
<i>Nema Plug Configuration</i>	5-15P	5-15P	5-15P	5-15P
<i>Total Amp Draw</i>	6.6	6.6	6.6	7.2
<i>12 oz. Can Capacity</i>	640	800	920	1160
<i>12 oz. Bottle Capacity</i>	432	540	621	810

Specifications subject to change without notice.



A City Discount