

Welded anchor plate at bottom of tube.

Anchor plate also has a welded nut on back of anchor plate.


TUBE BOTTOM (SIDE)



Oak Street uses a short bolt to screw into the welded anchor plate. This is a much improved method than the competitors, which use a long rod that will torque & stretch when force is applied - making it permanently loose.

Our bolt also has both a lock washer & a flat washer. The flat washer keeps the lock washer from catching on the anchor plate, preventing the bolt from becoming loose.

BASE SIZE	PART #	WEIGHT	LOCATION
22" x 22"	SSB22	13 lbs	IA, NC, CA
22" x 30"	SSB2230	17 lbs	IA, NC, CA
30" x 30"	SSB30	18 lbs	IA, NC, CA
36" x 36"	SSB36	21 lbs	IA, NC, CA
40" x 40"	SSB40	23 lbs	IA
5" x 22"	SSB522	8 lbs	IA, NC, CA
5" x 30"	SSB530	10 lbs	IA, NC, CA

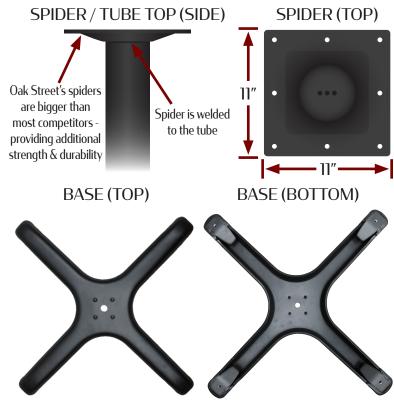

Stamped Steel base - most competitors use cast iron bases, which is a soft & brittle metal. Welded glide tabs with hollow back not possible with cast iron bases drastically reduce the chances of having a bad tab for glides.

- Constructed of Black Stamped Steel for unparalleled strength & stability will not fracture under heavier weights like cast iron bases
- Easy two-piece construction for quick assembly
- · Includes non-marring adjustable levelers
- Spider attaches to tabletop with (8) 3/4" #10 screws
- Recommended to use one size larger base for bar height applications
- Compatible with 3" or 4" standard height or bar height tubes

SUGGESTED STANDARD HEIGHT BASE APPLICATIONS

SQUARE TOPS	RECTANGULAR 24" TOPS	RECTANGULAR 30" TOPS	RECTANGULAR 36 - 42" TOPS	ROUND TOPS
24" x 24" : B22	24" x 24" : B22	30" x 36" : B2230	36" or 42" x 48" : B2230	30" Round : B22
30" x 30" : B22	24" x 36" : B2230	30" x 48" : B2230	36" or 42" x 60" : (2) B522	36" Round : B30
36" x 36" : B30	24" x 48" : B2230	30" x 60" : (2) B522	36" or 42" x 72" : (2) B522	42" Round : B36
42" x 42" : B36	24" x 60" : (2) B522	30" x 72" : (2) B522	36" or 42" x 96" : (2) B522	48" Round : B40
48" x 48" : B40	24" x 72" : (2) B522	30" x 96" : (2) B522		54" - 72" Round : B40 or (3) B522