

TECHNICAL DATA SHEET FOR P12M PROOFER/HOLDING CABINET

Full Size Manual / Electric

STANDARD FEATURES

- Dual function Proofer and Holding Cabinet
- Designed for individual use or system installed with Turbofan 32D Convection Ovens
- 12 full size sheet pan capacity
- 24 half size sheet pan capacity
- 2⁷/₈" / 74mm tray spacing
- Compact 28⁷/₈" / 735mm width
- 110-120V plug-in
- 20A NEMA 5-20P cordset fitted
- Full double skin construction
- Auto water fill system with optional integrated water filter kit
- Continuous door seal
- Side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Off / Proof / Hold mode selection
- Low velocity circulation fan system
- Mechanical thermostat
- Humidity level control
- Dual halogen cabinet interior lamps
- Cabinet temperature display thermometer
- 4 dia. 3" / 76mm castors with 2 front castors dual wheel and swivel lock, 2 rigid rear castors
- 100% recyclable packaging

ACCESSORIES

- Optional 3M Cuno water filter kit complete with cartridge and connection fittings
- Installs in pre-fitted rear housing of cabinet for flush rear installation



P12M

Unit shall be a Moffat electrically heated Turbofan Proofer and Holding Cabinet ETL Listed and NSF-4 listed. The proofer and holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged and field reversible. Unit shall have capacity for up to 24 half size sheet pans or 12 full size sheet pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a mechanical thermostat and humidity via a control of the water tank. A thermometer shall indicate the cabinet temperature. Proofer and holding cabinet shall be mounted on castors, with two rigid castors at rear and two swivel castors dual swivel and wheel lock and front. Proofer and Holding cabinet shall operate independently or in combination with Moffat Turbofan model E32D5 or G32D5 Convection Ovens. Proofer and Holding Cabinets shall be fitted with NEMA 5-20P cordsets. Unit shall be supplied in 100% recyclable shipping packaging.

P12M Full Size Manual / Electric Proofer/Holding Cabinet

CONSTRUCTION

- 304 stainless steel interior cabinet
- Stainless steel front, sides and top exterior
- Stainless steel interior side racks
- Stainless steel frame side hinged door
- 0.2" / 5mm thick door glass
- Stainless steel control panel
- Aluminized coated steel base and rear panels

CONTROLS

- Off / Proof / Holding mode selector switch.
- Mechanical thermostat 65-185°F / 20-85°C
- Air heating ON control panel indicator
- Humidity level control
- Humidity tank ON control panel indicator
- Cabinet temperature thermometer
- Auto-fill water system standard

CLEANING

- Stainless steel top and side exterior panels
- Stainless steel interior chamber
- Easy access to all interior surfaces
- Fully removable stainless steel rack support
- Removable humidity water tank (no tools)

SPECIFICATIONS

Electrical Requirements
110-120V, 50/60Hz, 1-phase, 1.95kW, 15.6A
NEMA 5-20P cordset fitted



Water Requirements (optional)

Cold water connection 3/4" GHT male
80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions

Width 28 7/8" / 735mm
Height 44 1/2" / 1129mm including dia. 3" / 76mm castors
Depth 31 7/8" / 810mm

Proofer Internal Dimensions

Width 18 1/4" / 465mm
Height 37 1/4" / 945mm
Depth 27 1/2" / 700mm
Volume 11ft³ / 0.31m³

Nett Weight (P12M)

194 lbs / 88kg

Packing Data (P12M)


236lbs / 107kg
32.1 ft³ / 0.91m³
Width 30" / 760mm
Height 51" / 1295mm
Depth 36 3/8" / 925mm

INSTALLATION CLEARANCES

Rear 0" / 0mm
LH Side 0" / 0mm
RH Side 1" / 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

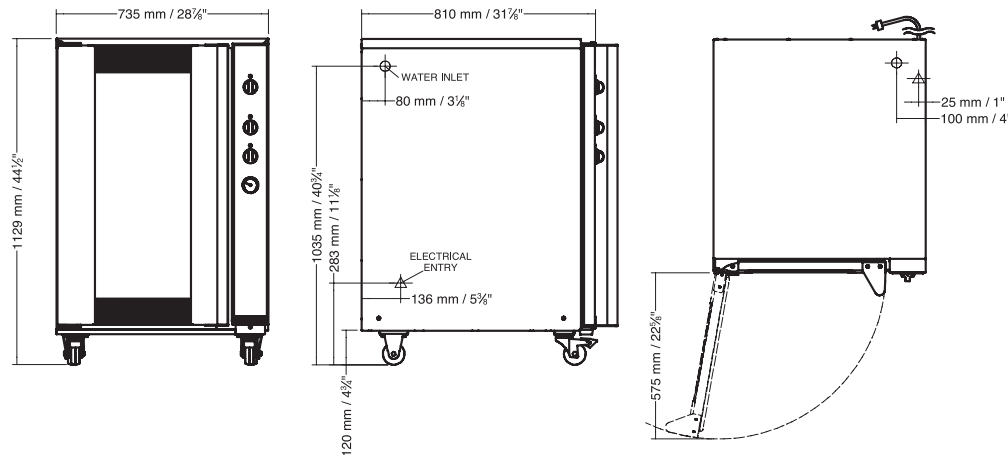

www.moffat.com

U.S.A.

Moffat Inc
3765 Champion Boulevard
Winston-Salem
North Carolina 27105
Ph Toll Free 1-800-551 8795
Ph 336-661 0257
Fax 336-661 9546
Email sales@moffat.com
www.moffat.com

Manufactured by:

Moffat Limited
16 Osborne Street PO Box 10-001
Christchurch 8081 New Zealand



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
Moffat 1270 / 3.12

